



Sistema de Cadastramento Unificado de Fornecedores - SICAF

Declaração

Declaramos para os fins exigidos na legislação, conforme documentação registrada no SICAF, que a situação do fornecedor no momento é a seguinte:

Dados do Fornecedor

CNPJ: 61.527.041/0001-25
Razão Social: ARCTA ENGENHARIA LTDA
Nome Fantasia: ARCTA ENGENHARIA
Situação do Fornecedor: Credenciado Data de Vencimento do Cadastro: 21/08/2026
Natureza Jurídica: SOCIEDADE EMPRESÁRIA LIMITADA
MEI: Não
Porte da Empresa: Micro Empresa

Ocorrências e Impedimentos

Ocorrência: Nada Consta
Impedimento de Licitar: Nada Consta
Ocorrências Impeditivas indiretas: Nada Consta
Vínculo com "Serviço Público": Nada Consta

Níveis cadastrados:

Documento(s) assinalado(s) com "*" está(ão) com prazo(s) vencido(s).

Fornecedor possui pendências em um ou mais níveis de cadastramento. Para mais informações, utilize as funcionalidades de consulta disponíveis.

Automática: a certidão foi obtida através de integração direta com o sistema emissor. Manual: a certidão foi inserida manualmente pelo fornecedor.

I - Credenciamento

II - Habilitação Jurídica

III - Regularidade Fiscal e Trabalhista Federal

Receita Federal e PGFN	Validade:	10/01/2026	Automática
FGTS	Validade:	10/01/2026	Automática
Trabalhista (http://www.tst.jus.br/certidao)	Validade:	03/03/2026	Automática

IV - Regularidade Fiscal Estadual/Distrital e Municipal (Possui Pendência)

Receita Estadual/Distrital	Validade:	14/09/2025 (*)
Receita Municipal	Validade:	26/01/2026



CONTROLADORIA-GERAL DA UNIÃO

Certidão Negativa Correccional - Entes Privados (ePAD, CGU-PJ, CEIS, CNEP e CEPIM)

Consultado: **ARCTA ENGENHARIA LTDA**

CPF/CNPJ: **61.527.041/0001-25**

Certifica-se que, em consulta aos sistemas ePAD e CGU-PJ e aos cadastros CEIS, CNEP e CEPIM, mantidos pela Corregedoria-Geral da União, **NÃO CONSTAM** registros de penalidades vigentes ou de procedimentos acusatórios em andamento, relativos ao CPF/CNPJ consultado.

Destaca-se que, nos termos da legislação vigente, os referidos cadastros consolidam informações prestadas pelos entes públicos, de todos os Poderes e esferas de governo.

Os Sistemas ePAD e CGU-PJ consolidam os dados sobre o andamento dos processos administrativos de responsabilização de entes privados no Poder Executivo Federal.

O Cadastro Nacional de Empresas Inidôneas e Suspensas (CEIS) apresenta a relação de empresas e pessoas físicas que sofreram sanções que implicaram a restrição de participar de licitações ou de celebrar contratos com a Administração Pública.

O Cadastro Nacional de Empresas Punidas (CNEP) apresenta a relação de empresas que sofreram quaisquer das punições previstas na Lei nº 12.846/2013 (Lei Anticorrupção).

O Cadastro de Entidades Privadas sem Fins Lucrativos Impedidas (CEPIM) apresenta a relação de entidades privadas sem fins lucrativos que estão impedidas de celebrar novos convênios, contratos de repasse ou termos de parceria com a Administração Pública Federal, em função de irregularidades não resolvidas em convênios, contratos de repasse ou termos de parceria firmados anteriormente.

Certidão emitida às 10:13:01 do dia 05/01/2026 , com validade até o dia 04/02/2026.

Link para consulta da verificação da certidão <https://certidoes.cgu.gov.br/>

Código de controle da certidão: 0QWwBpOulsbv9EyTVqEf

Qualquer rasura ou emenda invalidará este documento.



CONTROLADORIA-GERAL DA UNIÃO

Certidão Negativa Correccional - Entes Privados (ePAD, CGU-PJ, CEIS, CNEP e CEPIM)

Consultado: **NOBELIA DAMACENA DA SILVA**

CPF/CNPJ: **069.243.833-51**

Certifica-se que, em consulta aos sistemas ePAD e CGU-PJ e aos cadastros CEIS, CNEP e CEPIM, mantidos pela Corregedoria-Geral da União, **NÃO CONSTAM** registros de penalidades vigentes ou de procedimentos acusatórios em andamento, relativos ao CPF/CNPJ consultado.

Destaca-se que, nos termos da legislação vigente, os referidos cadastros consolidam informações prestadas pelos entes públicos, de todos os Poderes e esferas de governo.

Os [Sistemas ePAD e CGU-PJ](#) consolidam os dados sobre o andamento dos processos administrativos de responsabilização de entes privados no Poder Executivo Federal.

O [Cadastro Nacional de Empresas Inidôneas e Suspensas \(CEIS\)](#) apresenta a relação de empresas e pessoas físicas que sofreram sanções que implicaram a restrição de participar de licitações ou de celebrar contratos com a Administração Pública.

O [Cadastro Nacional de Empresas Punidas \(CNEP\)](#) apresenta a relação de empresas que sofreram quaisquer das punições previstas na Lei nº 12.846/2013 (Lei Anticorrupção).

O [Cadastro de Entidades Privadas sem Fins Lucrativos Impedidas \(CEPIM\)](#) apresenta a relação de entidades privadas sem fins lucrativos que estão impedidas de celebrar novos convênios, contratos de repasse ou termos de parceria com a Administração Pública Federal, em função de irregularidades não resolvidas em convênios, contratos de repasse ou termos de parceria firmados anteriormente.

Certidão emitida às 10:13:33 do dia 05/01/2026 , com validade até o dia 04/02/2026.

Link para consulta da verificação da certidão <https://certidoes.cgu.gov.br/>

Código de controle da certidão: iI3cKgIBo96M7qWjRG3O

Qualquer rasura ou emenda invalidará este documento.

CNPJ 61.527.041/0001-25

R João Cambota, 228, Antolândia – Bonito de Santa Fé/PB

Tel: (83) 9624-5834

PREGÃO ELETRÔNICO 90089/2025

PREFEITURA MUNICIPAL DE MARMELEIRO - PR

A empresa ARCTA ENGENHARIA LTDA, estabelecida na R João Cambota, 228, Antolândia – Bonito de Santa Fé/PB Cep: 58.960-000, inscrita no CNPJ sob nº 61.527.041/0001-25, neste ato representada por NOBELIA DAMACENA DA SILVA, Sócia-administrativa, RG 20073777271 – SSP CE, CPF 069.243.833-51, RUA JOSUE DE BRITO GUERRA, nº 137, REMEDIOS, CEP: 58900-000, propõe fornecer à Prefeitura Municipal de Marmeleiro, em estrito cumprimento ao previsto no Edital de Pregão Eletrônico nº 089/2025, conforme abaixo discriminado:

Conta Bancária para depósito para pagamento em caso de ser vencedor:

Banco 323 - Mercado Pago, Nº Agência 0001, Nº Conta nº 50722247944.

Declaro-me de pleno acordo com os termos e condições do Edital modalidade **Pregão Eletrônico nº 066/2025**, apresentando a seguinte proposta financeira, para fornecimento do seguinte serviço:

ITEM	DESCRIÇÃO	UNID	QUAN T. MÁX.E ST.	MARCA	Modelo	VALO R UNIT.	MARCA / FABRICA NTE
01	LUMINÁRIA PÚBLICA LED: com encaixe para fotocélula três pinos, potência 180 a 200W, eficiência mínima 160lm/w, cor 4.000k, fator de potência 0,98, vida útil 100.000h, tensão 100-277V, dimerizável 0/10V preparada telegestão, lente em policarbonato, ângulo de radiação luminosa 80°x150°, IP66, índice antivandalismo >IK09, corpo alumínio cor branca, encaixe para braço de 54 a 64mm, cabo alimentação de 1,0 (um) metro conforme NBR69598-1, para controle patrimonial gravação a laser 'MARMELEIRO-PR'. Carta de garantia dez (10) anos assinada pelo fabricante em nome do município.	UN	100	Rajix	RLP2005F	R\$ 338,72	R\$ 33.872,00
02	da, desenvolvido dentro do alto padrão técnico de qualidade para proporcionar o controle individual de lâmpada, seguro e de baixo custo. Seu sistema construtivo deve ser eletrônico para uso em corrente alternada, seu sistema de operação deve acender e apagar a lâmpada em função da variação da iluminação. Seu corpo deve ser em polipropileno estabilizado contra raios ultravioleta, para assim suportar intempéries, assim como os pinos de contato devem ser em latão estanhado preso ao corpo por sistema de rebiteagem ou outro devidamente rígido. Os contatos de carga devem ser do tipo LN, que acionam a carga a noite, portanto sua frequência deve ser de 50H/60Hz e contam com a célula fotoelétrica do tipo CdS, com encapsulamento blindado de resposta instantânea montado na posição lateral. Sua faixa de operação deve ser de 5a20 lux para seu acionamento no máximo 40 lux para desligar, deve possuir varistor para proteção contra surtos de rede de no mín. 60j, também relação para desligar/ligar 1,2 de acordo com a	UN	100	EMPALUX	RF30010	R\$ 19,76	R\$ 1.976,00

CNPJ 61.527.041/0001-25

R João Cambota, 228, Antolândia – Bonito de Santa Fé/PB

Tel: (83) 9624-5834

ABNT NBR 5123. O rele deve atender as normas téc. ABN NBR 5123 de 2016 a UL 773:1992, ANSI C136.10.1988. A faixa de operação pode ser informada antecipadamente e fornecida conforme especificação do consumidor. Seu peso deve ser maior/igual a 130G. Seu consumo deve ser de 0,8 W, a temperatura de trabalho é de -5° a +50°C. Potência de 1000W (carga resistiva) - 1800VA 220V (carga indutiva). Em embalagem individual com as informações do produto.					
Valor total: R\$ 35.848,00 (Trinta e cinco mil, oitocentos e quarenta e oito reais)					

Validade da Proposta: 90 dias

A apresentação da proposta implicará na plena aceitação das condições estabelecidas neste edital e seus anexos. Declaro que a proponente atende aos requisitos de habilitação e o declarante atesta a veracidade das informações prestadas (art. 63, I, d a Lei nº 14.133/2021).

Responsável pela assinatura do Contrato ou da Ata de Registro de Preços:

Nome: NOBELIA DAMACENA DA SILVA

CPF: 069.243.833-51

ENDEREÇO: RUA JOSUE DE BRITO GUERRA, nº 137, REMEDIOS, CEP: 58900-000,

TELEFONE: (83) 9624-5834

e-mail: arctaengenharia@gmail.com / bianca.araujo@otimizalicitacoes.com

Nos preços ofertados já estão inclusos os tributos, fretes, taxas, seguros, encargos sociais, trabalhistas e todas as demais despesas necessárias à execução do objeto.

Bonito de Santa Fé, 05 de janeiro de 2025.

ARCTA
ENGENHARIA
LTDA:615270
41000125

Digitally signed by
ARCTA
ENGENHARIA
LTDA:61527041000
125
Date: 2026.01.05
10:57:39 -03'00'

ARCTA ENGENHARIA LTDA
CNPJ 61.527.041/0001-25
NOBELIA DAMACENA DA SILVA
CPF 069.243.833-51
Responsável legal

IESNA:LM-63-2002

[TEST]

[TESTLAB] DEKRA Testing and Certification

[ISSUEDATE] 9/15/2022 11:25:47 AM

[MANUFAC] DEKRA Testing and Certification

[LUMINAIRE] 6140173 100W 5000K 1# initial 127V 60Hz C-plane

[LAMPCAT] 1

[LAMP] Test Philips Metas

TILT=NONE

1 4283.8 1 181 25 1 2 0.6 0.6 0

1 1 99.308

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27

28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45

46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69

70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88

89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109

110 111 112 113 114 115 116 117 118 119 120 121 122 123

124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141

142 143 144 145 146 147 148 149 150 151 152 153 154 155

156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173

174 175 176 177 178 179 180

0 15 30 45 60 75 90 105 120 135 150 165 180 195 210 225 240 255 270 285

300 315 330 345 360

3706.597 3737.603 3771.427 3802.433 3830.62 3861.626 3892.632 3923.637

3951.825 3985.649 4016.655 4050.479 4078.666 4109.672

4137.859 4163.228 4185.777 4202.689 4219.602 4236.514 4250.607 4261.882

4278.794 4292.888 4309.8 4323.894 4340.806 4352.081

4363.355 4371.812 4380.268 4385.905 4391.542 4391.542 4388.724 4377.449

4363.355 4343.625 4315.438 4284.432 4244.97 4197.052

4132.222 4053.298 3963.099 3858.807 3737.603 3588.211 3413.452 3213.324

3004.74 2756.693 2477.642 2181.678 1888.532 1592.568

1313.516 1057.014 845.6115 682.1266 586.2906 532.7352 498.9108 470.7237

439.718 403.0748 369.2503 338.2446 312.8763 287.5079

267.777 245.2273 225.4964 205.7655 186.0345 169.1223 149.3914 129.6604

112.7482 98.65468 84.56116 70.46763 56.3741 45.09928

33.82446 25.36835 19.73094 14.09353 8.456115 5.63741 2.818705 2.818705

5.63741 2.818705 5.63741 5.63741 2.818705 5.63741 2.818705

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 8.456115 5.63741 8.456115

8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482

11.27482 11.27482 11.27482 11.27482 11.27482 11.27482

11.27482 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353

14.09353 14.09353 14.09353 14.09353 14.09353 16.91223

14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223

3720.691 3757.334 3791.158 3822.164 3853.17 3884.176 3915.181 3946.187

3977.193 4011.017 4044.842 4075.847 4106.853 4140.678

4168.865 4197.052 4219.602 4239.333 4259.063 4275.976 4292.888 4309.8

4326.712 4340.806 4357.718 4374.63 4394.361 4411.273

4428.186 4445.098 4459.191 4467.647 4476.104 4481.741 4484.56 4481.741

4476.104 4464.829 4447.917 4422.548 4391.542 4352.081

4304.163 4242.151 4166.046 4070.21 3954.643 3813.708 3655.861 3478.282

3283.791 3049.839 2779.243 2474.823 2170.403 1854.708

1547.469 1254.324 1003.459 780.7813 631.39 549.6475 501.7295 465.0863

436.8993 405.8936 380.5252 352.3381 324.1511 298.7827

273.4144 250.8647 228.3151 211.4029 191.672 174.7597 155.0288 135.2978
115.5669 98.65468 84.56116 70.46763 56.3741 45.09928
33.82446 25.36835 16.91223 11.27482 8.456115 5.63741 2.818705 5.63741
5.63741 2.818705 2.818705 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 8.456115 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
11.27482 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
3720.691 3751.697 3785.521 3813.708 3844.714 3875.719 3906.725 3937.731
3965.918 3999.742 4033.567 4067.392 4101.216 4135.041
4168.865 4199.871 4230.876 4259.063 4284.432 4306.981 4329.531 4349.262
4371.812 4394.361 4416.911 4439.46 4464.829 4487.378
4512.747 4538.115 4566.302 4591.671 4617.039 4639.588 4662.139 4679.05
4693.144 4701.6 4710.056 4710.056 4704.419 4690.325
4667.775 4636.77 4597.308 4546.571 4487.378 4411.273 4315.438 4194.233
4056.117 3892.632 3700.96 3483.919 3247.148 2970.915
2658.039 2311.338 1973.094 1629.212 1305.06 1023.19 800.5122 631.39
532.7352 470.7237 428.4432 394.6187 363.6129 335.4259
310.0576 284.6892 259.3209 233.9525 211.4029 188.8532 171.941 155.0288
138.1165 121.2043 101.4734 84.56116 67.64892 53.5554
42.28058 31.00576 19.73094 14.09353 8.456115 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482 8.456115
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
3731.965 3760.153 3788.34 3816.527 3841.895 3872.901 3901.088 3932.094
3960.281 3994.105 4025.111 4058.935 4092.76 4126.584
4160.409 4197.052 4230.876 4264.701 4298.525 4329.531 4360.537 4391.542
4419.729 4450.735 4481.741 4509.928 4538.115 4566.302
4594.489 4622.676 4653.682 4687.506 4721.331 4752.337 4786.161 4819.986
4853.81 4884.816 4910.184 4932.734 4952.465 4966.559
4977.833 4989.108 4991.926 4989.108 4980.652 4966.559 4941.19 4910.184
4865.085 4805.892 4724.15 4619.857 4498.653 4343.625
4160.409 3946.187 3712.235 3436.001 3114.669 2745.419 2342.344 1902.626
1502.37 1175.4 930.1727 741.3195 600.3842 493.2734
417.1684 357.9755 318.5137 281.8705 253.6835 225.4964 200.1281 174.7597
149.3914 129.6604 107.1108 93.01727 78.92374 64.83022
47.91799 33.82446 22.54964 14.09353 8.456115 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 3731.965 3754.515 3774.246 3796.796 3819.345 3844.714 3870.082 3898.269
 3923.637 3954.643 3982.83 4011.017 4039.204 4070.21
 4104.035 4135.041 4168.865 4202.689 4239.333 4275.976 4312.619 4346.443
 4383.086 4419.729 4456.373 4493.016 4529.659 4569.121
 4608.583 4645.226 4684.688 4724.15 4760.792 4797.436 4836.898 4879.178
 4924.277 4972.195 5022.932 5073.669 5124.406 5172.324
 5220.242 5268.16 5313.259 5361.177 5403.458 5448.557 5490.837 5527.481
 5555.667 5578.218 5595.13 5612.042 5623.317 5626.135
 5617.679 5592.311 5550.03 5488.019 5406.276 5296.347 5166.687 4997.564
 4797.436 4569.121 4332.35 4058.935 3768.609 3452.914
 3111.85 2697.501 2221.14 1750.416 1305.06 927.3539 586.2906 372.0691
 270.5957 222.6777 186.0345 152.2101 124.023 98.65468
 76.10504 53.5554 36.64317 25.36835 14.09353 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 14.09353 11.27482 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 16.91223 16.91223 16.91223 14.09353 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223
 3740.422 3754.515 3768.609 3785.521 3802.433 3819.345 3839.076 3861.626
 3884.176 3909.544 3932.094 3957.462 3982.83 4005.38
 4033.567 4061.754 4089.941 4118.128 4151.953 4185.777 4219.602 4250.607
 4287.25 4323.894 4363.355 4402.817 4445.098 4484.56
 4524.021 4560.665 4605.764 4648.044 4695.962 4746.699 4800.255 4853.81
 4907.365 4960.921 5017.295 5076.488 5135.681 5197.692
 5265.341 5335.809 5411.914 5488.019 5564.124 5645.866 5724.79 5803.714
 5879.819 5958.742 6040.485 6122.227 6206.789 6296.987
 6392.823 6488.659 6581.676 6671.875 6759.254 6838.179 6908.646 6970.658
 7021.394 7060.856 7091.862 7111.593 7120.049 7108.774
 7046.763 6883.278 6576.039 6077.128 5330.171 4408.455 3320.435 2373.35
 1688.404 1175.4 758.2317 481.9986 310.0576 205.7655
 135.2978 87.37986 53.5554 33.82446 19.73094 14.09353 11.27482 11.27482
 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482
 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353

16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223
3743.24 3746.059 3754.515 3760.153 3768.609 3779.884 3791.158 3805.252
3819.345 3833.439 3850.351 3864.445 3881.357 3898.269
3915.181 3934.912 3957.462 3977.193 4002.561 4025.111 4050.479 4075.847
4104.035 4135.041 4166.046 4197.052 4228.058 4259.063
4287.25 4318.256 4352.081 4388.724 4425.367 4464.829 4512.747 4560.665
4602.945 4648.044 4693.144 4735.424 4780.523 4825.624
4879.178 4929.915 4986.29 5045.482 5107.494 5172.324 5237.154 5304.803
5369.633 5437.282 5507.75 5581.036 5657.141 5738.884
5820.626 5902.369 5978.473 6063.035 6144.777 6223.701 6299.806 6384.367
6466.109 6545.033 6621.138 6697.243 6759.254 6756.436
6652.144 6381.548 5885.456 5166.687 4273.157 3399.358 2607.302 1925.176
1282.511 789.2374 481.9986 312.8763 211.4029 146.5727
101.4734 73.28633 50.73669 36.64317 25.36835 19.73094 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 11.27482 14.09353
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
11.27482 11.27482 11.27482 11.27482 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
16.91223 16.91223 16.91223 16.91223 14.09353 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223
3737.603 3734.784 3729.147 3729.147 3726.328 3726.328 3729.147 3734.784
3737.603 3740.422 3746.059 3748.878 3751.697 3757.334
3762.971 3768.609 3777.065 3785.521 3793.977 3805.252 3816.527 3827.802
3839.076 3853.17 3870.082 3884.176 3898.269 3912.363
3923.637 3934.912 3951.825 3968.737 3991.286 4013.836 4033.567 4056.117
4078.666 4095.578 4112.491 4126.584 4140.678 4151.953
4166.046 4180.14 4194.233 4208.327 4222.42 4239.333 4253.426 4270.338
4287.25 4298.525 4306.981 4315.438 4321.075 4323.894
4323.894 4321.075 4309.8 4292.888 4267.52 4242.151 4213.964 4182.958
4154.771 4118.128 4073.029 4008.199 3912.363 3765.79
3557.206 3261.242 2875.079 2418.449 1930.813 1477.001 1065.47 761.0504
544.0101 397.4374 284.6892 208.5842 155.0288 115.5669
87.37986 62.01151 45.09928 31.00576 25.36835 19.73094 19.73094 19.73094
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 11.27482 11.27482 11.27482 11.27482 11.27482
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
11.27482 11.27482 11.27482 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 16.91223 14.09353
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223
3737.603 3726.328 3712.235 3700.96 3692.504 3681.229 3669.954 3661.498
3653.042 3644.586 3633.311 3622.036 3613.58 3602.305
3591.03 3579.755 3568.48 3560.024 3551.569 3543.112 3537.475 3531.837
3523.381 3517.744 3509.288 3500.832 3495.194 3486.738

3478.282 3469.826 3458.551 3447.276 3436.001 3424.727 3413.452 3399.358
 3388.083 3371.171 3354.259 3331.709 3306.341 3280.973
 3249.967 3213.324 3179.499 3145.675 3114.669 3080.845 3044.201 3004.74
 2962.459 2917.36 2869.442 2818.705 2767.968 2711.594
 2652.401 2593.208 2536.834 2472.004 2407.174 2339.525 2269.058 2192.953
 2114.029 2032.286 1947.725 1854.708 1753.234 1637.668
 1508.007 1355.797 1189.494 1023.19 859.705 710.3137 569.3784 448.1741
 346.7007 270.5957 208.5842 157.8475 121.2043 95.83598
 70.46763 47.91799 33.82446 25.36835 16.91223 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 11.27482 14.09353 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 16.91223 14.09353 14.09353 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223
 3731.965 3712.235 3689.685 3667.135 3647.404 3624.854 3602.305 3579.755
 3560.024 3537.475 3512.106 3486.738 3464.188 3441.639
 3416.271 3393.721 3371.171 3348.622 3323.253 3300.704 3275.335 3249.967
 3221.78 3190.774 3159.768 3128.763 3094.938 3061.114
 3024.47 2987.827 2945.547 2900.448 2852.53 2807.43 2756.693 2703.138
 2652.401 2601.665 2548.109 2494.554 2438.18 2387.443
 2333.888 2280.333 2226.777 2176.04 2125.304 2077.385 2026.649 1978.731
 1933.632 1885.714 1834.977 1787.059 1736.322 1685.586
 1637.668 1589.75 1541.832 1491.095 1440.358 1383.984 1330.429 1274.055
 1217.681 1158.488 1102.114 1040.102 978.0906 910.4417
 839.9741 766.6878 684.9454 603.2029 518.6417 442.5367 363.6129 295.964
 242.4086 194.4906 135.2978 90.19856 67.64892 53.5554
 42.28058 31.00576 19.73094 14.09353 11.27482 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 8.456115
 11.27482 8.456115 11.27482 8.456115 11.27482 8.456115
 11.27482 11.27482 11.27482 8.456115 8.456115 8.456115 8.456115 11.27482
 11.27482 11.27482 8.456115 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223
 3734.784 3709.416 3678.41 3647.404 3619.217 3588.211 3557.206 3523.381
 3492.376 3458.551 3424.727 3390.902 3359.896 3328.891
 3297.885 3264.061 3230.236 3193.593 3154.131 3114.669 3069.57 3027.289
 2982.19 2934.272 2880.717 2829.98 2773.606 2714.413
 2658.039 2604.483 2548.109 2491.735 2438.18 2387.443 2333.888 2277.514
 2223.958 2170.403 2116.848 2063.292 2012.555 1964.637
 1916.719 1868.802 1829.339 1787.059 1750.416 1708.135 1665.855 1623.574
 1581.294 1544.65 1508.007 1471.364 1429.083 1386.803
 1341.704 1305.06 1268.417 1226.137 1181.037 1130.301 1082.383 1034.465
 986.5468 941.4474 899.1669 854.0676 803.3309 746.9568

687.764 622.9338 555.2849 481.9986 414.3496 357.9755 304.4202 253.6835
 208.5842 169.1223 135.2978 107.1108 81.74245 62.01151
 47.91799 31.00576 19.73094 11.27482 8.456115 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 8.456115
 8.456115 8.456115 8.456115 5.63741 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223
 3729.147 3698.141 3661.498 3624.854 3591.03 3551.569 3514.925 3475.463
 3436.001 3396.54 3357.078 3317.616 3280.973 3244.33
 3204.868 3162.587 3117.488 3072.388 3021.652 2968.096 2914.541 2858.167
 2801.793 2739.781 2680.589 2621.396 2565.022 2508.647
 2452.273 2401.537 2347.981 2291.607 2235.233 2178.859 2122.485 2068.929
 2015.374 1970.275 1927.994 1885.714 1849.071 1812.427
 1775.784 1736.322 1694.042 1648.942 1606.662 1567.2 1530.557 1493.914
 1454.452 1412.171 1372.709 1336.066 1302.242 1265.599
 1223.318 1181.037 1138.757 1096.476 1057.014 1020.371 983.7281 944.2662
 904.8043 862.5237 825.8806 783.6 741.3195 693.4014
 645.4835 580.6532 515.8231 459.4489 403.0748 349.5194 273.4144 183.2158
 126.8417 104.2921 84.56116 70.46763 56.3741 45.09928
 33.82446 25.36835 16.91223 11.27482 5.63741 2.818705 2.818705 2.818705
 2.818705 2.818705 2.818705 2.818705 5.63741 2.818705
 2.818705 2.818705 2.818705 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223
 3737.603 3703.779 3667.135 3630.492 3591.03 3551.569 3509.288 3467.007
 3424.727 3382.446 3342.984 3300.704 3264.061 3224.598
 3182.318 3137.219 3089.301 3041.383 2985.009 2928.635 2869.442 2813.068
 2753.875 2694.682 2638.308 2584.752 2531.197 2477.642
 2424.086 2370.531 2314.157 2257.783 2198.59 2142.216 2085.842 2035.105
 1987.187 1944.906 1905.445 1865.983 1832.158 1798.334
 1764.509 1727.866 1688.404 1648.942 1612.299 1578.475 1544.65 1508.007
 1471.364 1431.902 1398.078 1364.253 1330.429 1290.967
 1248.686 1203.587 1161.306 1119.026 1076.745 1037.283 1000.64 963.9971
 927.3539 887.8922 845.6115 803.3309 758.2317 713.1324
 659.577 600.3842 541.1913 487.636 428.4432 329.7885 211.4029 146.5727
 124.023 109.9295 95.83598 81.74245 67.64892 50.73669
 36.64317 25.36835 16.91223 11.27482 5.63741 5.63741 2.818705 2.818705
 2.818705 2.818705 2.818705 2.818705 2.818705 2.818705
 2.818705 2.818705 5.63741 5.63741 2.818705 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223
 3734.784 3700.96 3661.498 3622.036 3582.574 3543.112 3503.65 3461.37
 3419.089 3379.627 3337.347 3297.885 3261.242 3221.78
 3182.318 3140.038 3094.938 3049.839 2999.102 2945.547 2891.991 2838.436
 2779.243 2720.05 2660.857 2604.483 2550.928 2494.554
 2443.817 2393.081 2339.525 2283.151 2223.958 2170.403 2116.848 2063.292
 2012.555 1970.275 1927.994 1888.532 1854.708 1820.883
 1784.24 1744.778 1702.498 1657.399 1615.118 1578.475 1541.832 1505.189
 1465.727 1423.446 1383.984 1350.16 1316.335 1276.873
 1234.593 1189.494 1147.213 1104.932 1065.47 1026.009 986.5468 947.0849
 907.623 870.9799 831.518 792.0561 749.7756 704.6763
 648.3021 586.2906 524.2792 467.905 414.3496 346.7007 233.9525 149.3914
 115.5669 98.65468 81.74245 67.64892 56.3741 45.09928
 33.82446 22.54964 16.91223 11.27482 5.63741 2.818705 2.818705 2.818705
 2.818705 5.63741 2.818705 2.818705 5.63741 5.63741
 2.818705 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 16.91223 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223
 3743.24 3709.416 3678.41 3641.767 3607.943 3571.299 3534.656 3498.013
 3464.188 3424.727 3388.083 3354.259 3320.435 3283.791
 3249.967 3216.142 3179.499 3142.856 3103.394 3061.114 3018.833 2976.553
 2931.453 2880.717 2829.98 2776.425 2722.869 2666.495
 2610.121 2559.384 2505.829 2452.273 2398.718 2347.981 2291.607 2235.233
 2181.678 2130.941 2077.385 2026.649 1978.731 1930.813
 1882.895 1837.796 1792.696 1750.416 1710.954 1668.673 1623.574 1581.294
 1541.832 1505.189 1465.727 1423.446 1383.984 1341.704
 1305.06 1268.417 1228.955 1186.675 1138.757 1090.839 1042.921 997.8216
 949.9036 907.623 865.3424 820.2432 769.5065 715.951
 659.577 597.5654 532.7352 465.0863 400.2561 346.7007 293.1453 242.4086
 197.3094 160.6662 126.8417 95.83598 73.28633 56.3741
 39.46187 25.36835 16.91223 11.27482 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353

14.09353 14.09353 14.09353 14.09353 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223
 3740.422 3712.235 3681.229 3650.223 3624.854 3596.668 3565.662 3537.475
 3512.106 3481.101 3452.914 3424.727 3399.358 3371.171
 3345.803 3320.435 3295.066 3269.698 3244.33 3218.961 3190.774 3165.406
 3134.4 3103.394 3069.57 3035.745 2996.283 2959.64 2914.541
 2872.26 2824.343 2773.606 2722.869 2674.951 2621.396 2570.659 2517.104
 2463.548 2407.174 2353.619 2297.245 2243.689 2190.134
 2136.578 2080.204 2029.468 1981.55 1930.813 1882.895 1834.977 1789.878
 1739.141 1688.404 1637.668 1589.75 1541.832 1493.914
 1443.177 1398.078 1350.16 1299.423 1248.686 1197.95 1144.394 1090.839
 1037.283 986.5468 930.1727 868.1611 806.1496 744.1382
 679.3079 611.659 535.554 465.0863 394.6187 324.1511 264.9583 214.2216
 166.3036 112.7482 78.92374 62.01151 47.91799 36.64317
 25.36835 19.73094 14.09353 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223
 3743.24 3723.509 3700.96 3681.229 3661.498 3644.586 3624.854 3607.943
 3591.03 3576.937 3560.024 3543.112 3529.019 3512.106
 3495.194 3481.101 3467.007 3452.914 3441.639 3430.364 3419.089 3407.814
 3396.54 3385.265 3371.171 3357.078 3342.984 3326.072
 3311.979 3295.066 3280.973 3264.061 3241.511 3221.78 3199.23 3176.681
 3148.494 3123.125 3089.301 3055.476 3016.014 2979.371
 2937.091 2894.81 2849.711 2804.612 2759.512 2708.775 2658.039 2604.483
 2553.747 2500.191 2443.817 2387.443 2331.069 2271.876
 2209.865 2147.853 2085.842 2023.83 1961.819 1896.989 1832.158 1764.509
 1688.404 1612.299 1539.013 1457.271 1372.709 1285.329
 1195.131 1090.839 972.4532 851.2489 730.0446 620.1151 504.5482 394.6187
 298.7827 231.1338 171.941 129.6604 95.83598 67.64892
 50.73669 39.46187 28.18705 19.73094 16.91223 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 16.91223
 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 14.09353 16.91223 14.09353 14.09353 16.91223 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353 11.27482
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223
 3743.24 3729.147 3717.872 3706.597 3695.322 3686.866 3681.229 3675.591
 3669.954 3664.317 3661.498 3658.679 3655.861 3653.042

3653.042 3655.861 3655.861 3658.679 3661.498 3667.135 3669.954 3672.773
 3678.41 3686.866 3692.504 3700.96 3706.597 3712.235
 3717.872 3723.509 3726.328 3734.784 3740.422 3746.059 3754.515 3765.79
 3771.427 3774.246 3774.246 3777.065 3774.246 3774.246
 3774.246 3771.427 3768.609 3768.609 3765.79 3762.971 3760.153 3751.697
 3748.878 3740.422 3729.147 3717.872 3706.597 3686.866
 3667.135 3647.404 3622.036 3593.849 3560.024 3526.2 3489.557 3447.276
 3393.721 3328.891 3255.604 3154.131 3041.383 2897.629
 2728.507 2508.647 2229.596 1896.989 1530.557 1192.312 885.0734 642.6647
 459.4489 332.6072 239.5899 177.5784 132.4791 98.65468
 73.28633 53.5554 36.64317 28.18705 22.54964 19.73094 19.73094 19.73094
 19.73094 19.73094 19.73094 19.73094 19.73094 19.73094
 19.73094 19.73094 19.73094 19.73094 19.73094 19.73094 19.73094 19.73094
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 14.09353
 16.91223 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353
 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 16.91223
 16.91223 16.91223 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223
 3737.603 3734.784 3731.965 3729.147 3726.328 3729.147 3731.965 3734.784
 3740.422 3748.878 3754.515 3762.971 3771.427 3782.702
 3796.796 3808.071 3822.164 3839.076 3855.989 3872.901 3892.632 3909.544
 3932.094 3951.825 3974.374 3996.924 4019.473 4042.023
 4064.573 4087.122 4112.491 4137.859 4168.865 4197.052 4228.058 4259.063
 4290.069 4318.256 4349.262 4383.086 4416.911 4450.735
 4487.378 4524.021 4560.665 4602.945 4642.407 4687.506 4738.243 4788.98
 4836.898 4890.454 4944.009 5000.383 5051.12 5113.131
 5183.599 5251.247 5318.896 5395.001 5473.925 5555.667 5637.41 5719.153
 5798.076 5877 5955.923 6023.573 6077.128 6082.766 6017.936
 5840.357 5493.656 4941.19 4157.59 3292.248 2446.636 1677.13 1014.734
 614.4777 383.3439 250.8647 171.941 121.2043 84.56116
 62.01151 45.09928 33.82446 25.36835 19.73094 19.73094 19.73094 19.73094
 19.73094 19.73094 19.73094 19.73094 19.73094 19.73094
 19.73094 19.73094 19.73094 19.73094 19.73094 19.73094 16.91223 19.73094
 19.73094 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 14.09353
 14.09353 16.91223 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 14.09353 11.27482 11.27482 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 16.91223
 14.09353 14.09353 14.09353 14.09353 16.91223 14.09353 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223
 3734.784 3740.422 3746.059 3751.697 3760.153 3768.609 3782.702 3793.977
 3805.252 3819.345 3833.439 3850.351 3864.445 3884.176
 3903.907 3923.637 3946.187 3971.555 3996.924 4022.292 4050.479 4075.847
 4104.035 4135.041 4168.865 4199.871 4236.514 4270.338
 4301.344 4332.35 4363.355 4399.999 4436.642 4476.104 4524.021 4571.939
 4619.857 4667.775 4718.512 4772.068 4828.441 4881.997
 4944.009 5006.02 5068.032 5132.862 5194.874 5262.522 5330.171 5400.639
 5468.288 5541.574 5617.679 5699.421 5786.802 5879.819

5981.292 6094.041 6203.97 6316.718 6429.466 6542.214 6638.05 6733.886
 6821.267 6903.009 6970.658 7018.576 7046.763 7038.306
 6962.202 6787.442 6483.021 6009.479 5299.166 4363.355 3238.692 2280.333
 1533.376 980.9094 594.7468 377.7065 239.5899 155.0288
 101.4734 64.83022 42.28058 28.18705 19.73094 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 8.456115 11.27482
 11.27482 8.456115 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 16.91223 14.09353 14.09353 14.09353
 16.91223 14.09353 16.91223 16.91223 16.91223
 3723.509 3737.603 3748.878 3762.971 3777.065 3793.977 3810.889 3830.62
 3847.532 3867.263 3889.813 3909.544 3929.275 3951.825
 3977.193 4002.561 4030.748 4056.117 4087.122 4118.128 4149.134 4177.321
 4208.327 4242.151 4273.157 4304.163 4337.987 4374.63
 4408.455 4442.279 4476.104 4512.747 4546.571 4580.396 4614.22 4653.682
 4695.962 4738.243 4783.342 4831.26 4879.178 4924.277
 4972.195 5022.932 5076.488 5127.225 5180.78 5231.517 5282.253 5327.353
 5366.814 5400.639 5431.645 5459.832 5482.381 5499.293
 5510.568 5510.568 5493.656 5462.65 5409.095 5332.99 5237.154 5104.675
 4935.553 4732.606 4509.928 4253.426 3960.281 3644.586
 3314.797 2951.184 2559.384 2125.304 1657.399 1217.681 780.7813 450.9928
 284.6892 217.0403 177.5784 146.5727 118.3856 93.01727
 70.46763 50.73669 33.82446 22.54964 14.09353 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482
 11.27482 8.456115 11.27482 11.27482 8.456115 8.456115
 11.27482 8.456115 11.27482 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 16.91223 14.09353
 16.91223 16.91223 16.91223 16.91223 16.91223
 3717.872 3737.603 3760.153 3779.884 3802.433 3822.164 3844.714 3867.263
 3889.813 3912.363 3937.731 3965.918 3991.286 4019.473
 4047.66 4075.847 4104.035 4132.222 4160.409 4191.415 4216.783 4242.151
 4264.701 4290.069 4315.438 4340.806 4368.993 4394.361
 4422.548 4447.917 4476.104 4507.109 4538.115 4569.121 4600.126 4633.951
 4662.139 4693.144 4721.331 4752.337 4777.705 4800.255
 4817.167 4834.079 4845.354 4850.991 4850.991 4845.354 4834.079 4811.529
 4783.342 4735.424 4673.413 4594.489 4495.834 4368.993
 4208.327 4016.655 3799.614 3537.475 3241.511 2906.085 2542.472 2119.666
 1685.586 1305.06 1017.552 797.6935 639.8461 524.2792
 439.718 374.8878 324.1511 284.6892 250.8647 222.6777 197.3094 171.941
 146.5727 124.023 104.2921 84.56116 73.28633 59.19281
 45.09928 31.00576 19.73094 14.09353 8.456115 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 8.456115 5.63741 8.456115 5.63741
8.456115 8.456115 5.63741 8.456115 5.63741 8.456115 8.456115
5.63741 8.456115 5.63741 5.63741 8.456115 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 11.27482 11.27482 11.27482 11.27482
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223
3712.235 3740.422 3765.79 3791.158 3813.708 3839.076 3864.445 3889.813
3915.181 3943.368 3971.555 3999.742 4027.929 4056.117
4084.303 4112.491 4137.859 4160.409 4180.14 4199.871 4219.602 4236.514
4253.426 4270.338 4290.069 4306.981 4329.531 4349.262
4371.812 4397.18 4419.729 4445.098 4470.466 4495.834 4518.384 4538.115
4555.027 4566.302 4577.577 4580.396 4580.396 4571.939
4557.846 4535.296 4501.472 4464.829 4414.092 4346.443 4261.882 4157.59
4033.567 3881.357 3703.779 3498.013 3278.154 3013.196
2711.594 2364.894 2018.193 1671.492 1364.253 1085.201 862.5237 687.764
566.5597 484.8173 431.2619 388.9813 357.9755 332.6072
307.2389 279.0518 250.8647 225.4964 202.9468 183.2158 166.3036 149.3914
132.4791 115.5669 98.65468 78.92374 64.83022 50.73669
39.46187 28.18705 19.73094 14.09353 8.456115 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 8.456115 8.456115 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
11.27482 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 16.91223
16.91223 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223
3715.053 3748.878 3779.884 3808.071 3836.258 3864.445 3892.632 3920.819
3949.006 3980.011 4011.017 4039.204 4067.392 4095.578
4123.766 4146.315 4168.865 4185.777 4202.689 4216.783 4230.876 4242.151
4256.245 4270.338 4287.25 4301.344 4318.256 4335.168
4349.262 4360.537 4374.63 4388.724 4397.18 4399.999 4402.817 4399.999
4394.361 4383.086 4368.993 4346.443 4318.256 4281.613
4233.695 4174.502 4104.035 4016.655 3909.544 3777.065 3624.854 3452.914
3269.698 3047.02 2790.518 2497.373 2192.953 1880.076
1575.656 1288.148 1042.921 823.0619 665.2144 563.741 504.5482 465.0863
431.2619 403.0748 374.8878 349.5194 324.1511 295.964
270.5957 248.0461 225.4964 208.5842 188.8532 171.941 155.0288 135.2978
115.5669 101.4734 84.56116 70.46763 56.3741 45.09928
33.82446 25.36835 16.91223 11.27482 8.456115 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 8.456115 8.456115 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482 11.27482
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482

11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
3706.597 3737.603 3771.427 3802.433 3830.62 3861.626 3892.632 3923.637
3951.825 3985.649 4016.655 4050.479 4078.666 4109.672
4137.859 4163.228 4185.777 4202.689 4219.602 4236.514 4250.607 4261.882
4278.794 4292.888 4309.8 4323.894 4340.806 4352.081
4363.355 4371.812 4380.268 4385.905 4391.542 4391.542 4388.724 4377.449
4363.355 4343.625 4315.438 4284.432 4244.97 4197.052
4132.222 4053.298 3963.099 3858.807 3737.603 3588.211 3413.452 3213.324
3004.74 2756.693 2477.642 2181.678 1888.532 1592.568
1313.516 1057.014 845.6115 682.1266 586.2906 532.7352 498.9108 470.7237
439.718 403.0748 369.2503 338.2446 312.8763 287.5079
267.777 245.2273 225.4964 205.7655 186.0345 169.1223 149.3914 129.6604
112.7482 98.65468 84.56116 70.46763 56.3741 45.09928
33.82446 25.36835 19.73094 14.09353 8.456115 5.63741 2.818705 2.818705
5.63741 2.818705 5.63741 5.63741 2.818705 5.63741 2.818705
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 8.456115 5.63741 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
11.27482 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 16.91223
14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223

IESNA:LM-63-2002

[TEST]

[TESTLAB] DEKRA Testing and Certification

[ISSUEDATE] 9/15/2022 10:57:15 AM

[MANUFAC] DEKRA Testing and Certification

[LUMINAIRE] 6140173 100W 5000K 1# initial 220V 60Hz C-plane

[LAMPCAT] 1

[LAMP] Test Philips Metas

TILT=NONE

1 4283.8 1 181 25 1 2 0.6 0.6 0

1 1 97.363

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27

28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45

46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69

70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88

89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109

110 111 112 113 114 115 116 117 118 119 120 121 122 123

124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141

142 143 144 145 146 147 148 149 150 151 152 153 154 155

156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173

174 175 176 177 178 179 180

0 15 30 45 60 75 90 105 120 135 150 165 180 195 210 225 240 255 270 285

300 315 330 345 360

3706.597 3737.603 3768.609 3802.433 3830.62 3861.626 3892.632 3923.637

3954.643 3985.649 4016.655 4050.479 4078.666 4109.672

4140.678 4163.228 4185.777 4202.689 4219.602 4233.695 4247.789 4261.882

4278.794 4295.707 4309.8 4323.894 4337.987 4352.081

4360.537 4371.812 4380.268 4383.086 4391.542 4391.542 4385.905 4377.449

4363.355 4343.625 4318.256 4284.432 4244.97 4197.052

4132.222 4056.117 3963.099 3858.807 3737.603 3588.211 3413.452 3213.324

3004.74 2756.693 2477.642 2181.678 1888.532 1592.568

1313.516 1057.014 845.6115 684.9454 586.2906 532.7352 498.9108 470.7237

439.718 403.0748 369.2503 338.2446 312.8763 287.5079

267.777 245.2273 225.4964 205.7655 186.0345 169.1223 146.5727 129.6604

115.5669 98.65468 84.56116 70.46763 56.3741 45.09928

36.64317 25.36835 19.73094 14.09353 8.456115 5.63741 2.818705 2.818705

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 8.456115 5.63741 8.456115

8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115

11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482

11.27482 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353

14.09353 14.09353 14.09353 14.09353 14.09353 14.09353

14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223

3723.509 3757.334 3793.977 3824.983 3855.989 3886.994 3918 3949.006

3980.011 4011.017 4044.842 4078.666 4109.672 4140.678

4171.684 4197.052 4222.42 4242.151 4259.063 4278.794 4295.707 4312.619

4326.712 4346.443 4363.355 4380.268 4397.18 4414.092

4431.004 4445.098 4459.191 4470.466 4476.104 4481.741 4484.56 4484.56

4478.922 4467.647 4447.917 4425.367 4391.542 4352.081

4304.163 4242.151 4166.046 4070.21 3957.462 3813.708 3655.861 3478.282

3283.791 3049.839 2779.243 2474.823 2167.584 1851.889

1547.469 1254.324 1003.459 780.7813 631.39 549.6475 501.7295 467.905

436.8993 405.8936 380.5252 352.3381 324.1511 298.7827

273.4144 250.8647 231.1338 211.4029 191.672 174.7597 155.0288 135.2978
 115.5669 101.4734 84.56116 70.46763 56.3741 45.09928
 33.82446 25.36835 16.91223 11.27482 8.456115 5.63741 2.818705 5.63741
 5.63741 5.63741 5.63741 2.818705 5.63741 5.63741 2.818705
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 14.09353 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 3723.509 3754.515 3785.521 3816.527 3847.532 3875.719 3906.725 3937.731
 3968.737 3999.742 4036.385 4070.21 4101.216 4137.859
 4168.865 4202.689 4233.695 4261.882 4287.25 4309.8 4332.35 4354.899
 4374.63 4397.18 4419.729 4442.279 4467.647 4493.016 4515.565
 4543.753 4569.121 4594.489 4619.857 4642.407 4662.139 4681.869 4695.962
 4704.419 4712.875 4712.875 4707.238 4693.144 4670.594
 4639.588 4600.126 4552.208 4490.197 4414.092 4315.438 4197.052 4058.935
 3892.632 3700.96 3483.919 3249.967 2973.734 2658.039
 2308.519 1970.275 1629.212 1305.06 1020.371 800.5122 634.2086 532.7352
 470.7237 428.4432 394.6187 363.6129 335.4259 310.0576
 284.6892 259.3209 233.9525 211.4029 188.8532 171.941 155.0288 138.1165
 121.2043 101.4734 84.56116 67.64892 53.5554 42.28058
 31.00576 19.73094 14.09353 8.456115 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353
 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 16.91223 14.09353 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 3734.784 3760.153 3791.158 3819.345 3844.714 3872.901 3903.907 3934.912
 3963.099 3994.105 4027.929 4061.754 4095.578 4129.403
 4163.228 4199.871 4233.695 4267.52 4301.344 4335.168 4363.355 4394.361
 4422.548 4453.554 4484.56 4512.747 4540.934 4569.121
 4597.308 4628.314 4659.32 4693.144 4726.969 4757.974 4791.799 4825.624
 4856.629 4887.635 4915.822 4938.372 4955.284 4969.377
 4983.471 4991.926 4994.745 4991.926 4986.29 4969.377 4946.827 4913.003
 4870.723 4808.71 4726.969 4625.495 4501.472 4346.443
 4163.228 3949.006 3715.053 3436.001 3114.669 2745.419 2342.344 1905.445
 1502.37 1172.581 930.1727 741.3195 600.3842 493.2734
 417.1684 360.7943 318.5137 284.6892 253.6835 225.4964 200.1281 174.7597
 149.3914 129.6604 109.9295 93.01727 78.92374 64.83022
 47.91799 33.82446 22.54964 14.09353 8.456115 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 8.456115 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 16.91223 14.09353 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 3734.784 3754.515 3777.065 3799.614 3822.164 3844.714 3872.901 3898.269
 3926.456 3954.643 3985.649 4013.836 4044.842 4073.029
 4104.035 4137.859 4171.684 4205.508 4242.151 4278.794 4315.438 4352.081
 4388.724 4422.548 4462.01 4498.653 4535.296 4574.758
 4611.402 4648.044 4687.506 4726.969 4763.611 4800.255 4839.717 4884.816
 4929.915 4977.833 5025.751 5079.307 5127.225 5175.143
 5223.061 5270.979 5318.896 5363.996 5409.095 5454.194 5496.475 5533.118
 5558.486 5581.036 5600.767 5617.679 5628.954 5631.772
 5620.498 5595.13 5552.849 5490.837 5409.095 5299.166 5169.505 5000.383
 4800.255 4574.758 4335.168 4061.754 3771.427 3452.914
 3114.669 2700.319 2221.14 1750.416 1307.879 930.1727 589.1093 374.8878
 273.4144 225.4964 186.0345 155.0288 124.023 101.4734
 76.10504 53.5554 39.46187 25.36835 16.91223 11.27482 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223
 3743.24 3757.334 3771.427 3788.34 3802.433 3822.164 3844.714 3864.445
 3886.994 3909.544 3934.912 3960.281 3982.83 4008.199
 4036.385 4061.754 4092.76 4123.766 4154.771 4188.596 4222.42 4253.426
 4290.069 4326.712 4366.174 4408.455 4447.917 4490.197
 4529.659 4566.302 4605.764 4650.863 4698.781 4749.518 4803.074 4856.629
 4913.003 4963.74 5022.932 5082.125 5141.318 5200.511
 5268.16 5338.627 5414.732 5493.656 5569.761 5648.685 5727.608 5806.533
 5882.638 5961.561 6043.304 6127.865 6212.426 6302.625
 6395.642 6494.297 6587.314 6677.512 6764.892 6846.635 6914.284 6973.476
 7027.032 7066.494 7094.681 7114.412 7125.687 7111.593
 7046.763 6886.097 6576.039 6074.309 5327.353 4405.636 3314.797 2373.35
 1688.404 1175.4 758.2317 484.8173 312.8763 208.5842
 135.2978 87.37986 56.3741 33.82446 22.54964 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 11.27482 14.09353 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 8.456115 11.27482 11.27482 8.456115 8.456115
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353

14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223
 3746.059 3748.878 3754.515 3762.971 3771.427 3782.702 3793.977 3808.071
 3822.164 3836.258 3853.17 3867.263 3881.357 3901.088 3918
 3937.731 3960.281 3982.83 4005.38 4027.929 4053.298 4078.666 4106.853
 4135.041 4168.865 4199.871 4230.876 4261.882 4290.069
 4321.075 4354.899 4388.724 4428.186 4470.466 4515.565 4563.484 4605.764
 4650.863 4695.962 4741.062 4786.161 4831.26 4881.997
 4935.553 4991.926 5051.12 5110.312 5175.143 5242.792 5310.44 5375.271
 5442.919 5516.206 5589.492 5662.778 5741.703 5826.263
 5905.188 5984.111 6068.672 6150.415 6229.338 6305.443 6390.004 6471.747
 6550.67 6623.957 6700.062 6759.254 6759.254 6654.963
 6381.548 5885.456 5163.868 4273.157 3396.54 2607.302 1925.176 1282.511
 789.2374 484.8173 315.695 211.4029 146.5727 104.2921
 73.28633 53.5554 36.64317 28.18705 19.73094 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 11.27482 14.09353
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223
 3737.603 3734.784 3731.965 3729.147 3729.147 3729.147 3731.965 3734.784
 3740.422 3743.24 3746.059 3751.697 3754.515 3760.153
 3765.79 3771.427 3777.065 3785.521 3796.796 3808.071 3816.527 3827.802
 3841.895 3855.989 3870.082 3886.994 3898.269 3912.363
 3926.456 3940.55 3954.643 3971.555 3991.286 4013.836 4036.385 4058.935
 4081.485 4098.397 4115.31 4129.403 4140.678 4154.771
 4168.865 4180.14 4194.233 4211.145 4225.239 4242.151 4256.245 4273.157
 4290.069 4301.344 4312.619 4321.075 4323.894 4329.531
 4329.531 4323.894 4315.438 4298.525 4273.157 4244.97 4216.783 4188.596
 4157.59 4120.947 4075.847 4013.836 3918 3771.427 3560.024
 3264.061 2875.079 2421.268 1933.632 1477.001 1068.289 761.0504 544.0101
 397.4374 287.5079 211.4029 155.0288 115.5669 87.37986
 64.83022 45.09928 31.00576 25.36835 19.73094 19.73094 16.91223 19.73094
 16.91223 19.73094 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223
 3740.422 3726.328 3715.053 3703.779 3689.685 3681.229 3672.773 3661.498
 3655.861 3644.586 3636.129 3624.854 3613.58 3602.305
 3593.849 3579.755 3571.299 3560.024 3551.569 3545.931 3540.294 3531.837
 3526.2 3520.563 3512.106 3503.65 3495.194 3489.557

687.764 622.9338 555.2849 481.9986 414.3496 357.9755 304.4202 253.6835
208.5842 169.1223 135.2978 107.1108 81.74245 62.01151
47.91799 31.00576 19.73094 11.27482 8.456115 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 8.456115 8.456115 5.63741 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 11.27482 11.27482
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223
3731.965 3698.141 3664.317 3627.673 3593.849 3554.387 3514.925 3475.463
3436.001 3396.54 3357.078 3320.435 3283.791 3244.33
3204.868 3165.406 3117.488 3072.388 3021.652 2968.096 2914.541 2858.167
2801.793 2742.6 2680.589 2621.396 2565.022 2508.647
2455.092 2404.355 2347.981 2291.607 2235.233 2178.859 2122.485 2068.929
2018.193 1970.275 1927.994 1885.714 1849.071 1812.427
1775.784 1736.322 1694.042 1648.942 1606.662 1567.2 1530.557 1493.914
1454.452 1412.171 1372.709 1336.066 1302.242 1265.599
1226.137 1181.037 1138.757 1096.476 1057.014 1020.371 983.7281 944.2662
904.8043 862.5237 825.8806 783.6 741.3195 693.4014
642.6647 580.6532 515.8231 459.4489 403.0748 349.5194 273.4144 183.2158
126.8417 104.2921 84.56116 70.46763 56.3741 45.09928
33.82446 25.36835 16.91223 11.27482 5.63741 5.63741 2.818705 2.818705
2.818705 2.818705 2.818705 2.818705 5.63741 2.818705
5.63741 2.818705 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 8.456115 5.63741 5.63741 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
8.456115 8.456115 8.456115 11.27482 11.27482 11.27482
11.27482 11.27482 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
16.91223
3740.422 3706.597 3667.135 3630.492 3593.849 3551.569 3512.106 3467.007
3427.545 3385.265 3342.984 3303.522 3264.061 3224.598
3182.318 3140.038 3092.12 3041.383 2987.827 2928.635 2872.26 2815.886
2756.693 2697.501 2638.308 2584.752 2531.197 2477.642
2424.086 2373.35 2316.976 2260.602 2198.59 2142.216 2088.66 2035.105
1987.187 1944.906 1905.445 1868.802 1834.977 1801.152
1767.328 1727.866 1688.404 1648.942 1615.118 1581.294 1544.65 1508.007
1471.364 1431.902 1398.078 1364.253 1330.429 1290.967
1248.686 1206.406 1164.125 1119.026 1076.745 1037.283 1000.64 963.9971
927.3539 887.8922 845.6115 803.3309 758.2317 713.1324
659.577 600.3842 541.1913 487.636 428.4432 329.7885 211.4029 146.5727
124.023 109.9295 98.65468 81.74245 64.83022 50.73669
36.64317 25.36835 16.91223 11.27482 5.63741 2.818705 2.818705 2.818705
2.818705 2.818705 2.818705 2.818705 2.818705 2.818705
2.818705 2.818705 2.818705 2.818705 2.818705 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 8.456115 5.63741 5.63741
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 16.91223 16.91223 14.09353 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223
 3734.784 3700.96 3664.317 3624.854 3588.211 3545.931 3503.65 3461.37
 3421.908 3379.627 3340.166 3300.704 3261.242 3224.598
 3185.137 3142.856 3097.757 3049.839 2999.102 2945.547 2891.991 2838.436
 2779.243 2720.05 2660.857 2607.302 2550.928 2494.554
 2443.817 2393.081 2339.525 2283.151 2226.777 2170.403 2116.848 2063.292
 2015.374 1970.275 1927.994 1888.532 1854.708 1820.883
 1784.24 1744.778 1702.498 1657.399 1615.118 1578.475 1544.65 1505.189
 1465.727 1423.446 1383.984 1350.16 1316.335 1276.873
 1234.593 1189.494 1147.213 1104.932 1065.47 1026.009 986.5468 947.0849
 907.623 870.9799 831.518 792.0561 752.5943 704.6763
 648.3021 586.2906 524.2792 467.905 414.3496 343.882 233.9525 149.3914
 115.5669 98.65468 81.74245 67.64892 56.3741 45.09928
 33.82446 22.54964 16.91223 8.456115 5.63741 2.818705 2.818705 2.818705
 2.818705 2.818705 2.818705 2.818705 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 8.456115 8.456115 8.456115 5.63741 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223
 3743.24 3712.235 3678.41 3641.767 3610.761 3574.118 3534.656 3500.832
 3464.188 3427.545 3390.902 3354.259 3320.435 3286.61
 3252.786 3218.961 3182.318 3145.675 3106.213 3063.932 3018.833 2976.553
 2931.453 2880.717 2829.98 2779.243 2722.869 2666.495
 2610.121 2559.384 2505.829 2452.273 2398.718 2347.981 2291.607 2238.052
 2181.678 2130.941 2077.385 2026.649 1978.731 1930.813
 1882.895 1837.796 1792.696 1750.416 1710.954 1668.673 1626.393 1581.294
 1544.65 1505.189 1465.727 1426.265 1383.984 1341.704
 1302.242 1268.417 1231.774 1186.675 1138.757 1090.839 1045.74 997.8216
 949.9036 907.623 865.3424 820.2432 769.5065 715.951
 659.577 597.5654 532.7352 465.0863 400.2561 346.7007 293.1453 242.4086
 197.3094 160.6662 124.023 98.65468 73.28633 56.3741
 39.46187 25.36835 16.91223 11.27482 8.456115 5.63741 5.63741 2.818705
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 11.27482 8.456115 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353

14.09353 14.09353 14.09353 14.09353 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223
 3740.422 3712.235 3681.229 3653.042 3624.854 3596.668 3568.48 3540.294
 3514.925 3486.738 3455.732 3427.545 3399.358 3373.99
 3345.803 3320.435 3295.066 3272.517 3247.148 3218.961 3193.593 3165.406
 3134.4 3103.394 3069.57 3038.564 2999.102 2959.64 2917.36
 2875.079 2827.161 2776.425 2725.688 2674.951 2624.215 2570.659 2517.104
 2463.548 2409.993 2353.619 2300.063 2246.508 2192.953
 2136.578 2083.023 2029.468 1981.55 1933.632 1885.714 1837.796 1789.878
 1739.141 1688.404 1637.668 1589.75 1541.832 1493.914
 1443.177 1398.078 1350.16 1299.423 1248.686 1197.95 1144.394 1090.839
 1037.283 986.5468 930.1727 868.1611 806.1496 744.1382
 679.3079 611.659 535.554 465.0863 394.6187 324.1511 264.9583 214.2216
 166.3036 112.7482 78.92374 62.01151 47.91799 36.64317
 28.18705 16.91223 14.09353 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223
 3746.059 3726.328 3703.779 3684.047 3664.317 3644.586 3627.673 3610.761
 3593.849 3576.937 3562.843 3545.931 3531.837 3514.925
 3498.013 3483.919 3467.007 3455.732 3444.458 3433.183 3421.908 3410.633
 3399.358 3385.265 3373.99 3357.078 3342.984 3328.891
 3311.979 3297.885 3280.973 3261.242 3244.33 3221.78 3199.23 3176.681
 3151.312 3123.125 3092.12 3055.476 3018.833 2979.371
 2937.091 2894.81 2849.711 2804.612 2759.512 2708.775 2658.039 2604.483
 2553.747 2500.191 2446.636 2387.443 2331.069 2271.876
 2209.865 2147.853 2085.842 2023.83 1961.819 1896.989 1832.158 1761.691
 1688.404 1612.299 1539.013 1457.271 1372.709 1285.329
 1195.131 1090.839 972.4532 851.2489 730.0446 620.1151 504.5482 394.6187
 298.7827 231.1338 171.941 129.6604 95.83598 67.64892
 50.73669 39.46187 28.18705 19.73094 16.91223 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 14.09353 14.09353
 16.91223 16.91223 14.09353 14.09353 14.09353 14.09353 16.91223
 16.91223 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 11.27482 14.09353 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353 11.27482
 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 14.09353
 3743.24 3729.147 3717.872 3703.779 3695.322 3686.866 3681.229 3675.591
 3669.954 3667.135 3661.498 3658.679 3655.861 3655.861

3655.861 3655.861 3655.861 3658.679 3661.498 3667.135 3669.954 3675.591
 3681.229 3686.866 3695.322 3700.96 3706.597 3712.235
 3717.872 3723.509 3729.147 3734.784 3743.24 3748.878 3757.334 3765.79
 3771.427 3777.065 3777.065 3779.884 3777.065 3774.246
 3774.246 3771.427 3771.427 3768.609 3768.609 3765.79 3760.153 3754.515
 3748.878 3740.422 3731.965 3720.691 3706.597 3689.685
 3669.954 3647.404 3622.036 3593.849 3562.843 3529.019 3489.557 3447.276
 3393.721 3328.891 3255.604 3154.131 3041.383 2900.448
 2731.325 2508.647 2232.415 1896.989 1530.557 1192.312 885.0734 642.6647
 459.4489 332.6072 239.5899 174.7597 132.4791 98.65468
 73.28633 53.5554 36.64317 28.18705 22.54964 19.73094 19.73094 19.73094
 19.73094 19.73094 19.73094 19.73094 19.73094 19.73094
 19.73094 19.73094 19.73094 19.73094 19.73094 19.73094 19.73094 19.73094
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 14.09353 11.27482 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 16.91223 14.09353
 14.09353 16.91223 16.91223 16.91223 16.91223 14.09353 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223
 3737.603 3734.784 3729.147 3729.147 3726.328 3729.147 3731.965 3734.784
 3743.24 3748.878 3754.515 3762.971 3771.427 3782.702
 3796.796 3808.071 3824.983 3839.076 3855.989 3875.719 3892.632 3912.363
 3932.094 3951.825 3974.374 3996.924 4022.292 4044.842
 4067.392 4087.122 4112.491 4140.678 4168.865 4197.052 4228.058 4259.063
 4290.069 4318.256 4349.262 4383.086 4419.729 4453.554
 4487.378 4524.021 4563.484 4600.126 4645.226 4687.506 4738.243 4788.98
 4836.898 4893.272 4946.827 5000.383 5053.938 5113.131
 5180.78 5251.247 5321.715 5395.001 5473.925 5558.486 5634.591 5719.153
 5800.895 5879.819 5953.105 6023.573 6077.128 6082.766
 6017.936 5837.538 5490.837 4938.372 4154.771 3292.248 2446.636 1677.13
 1014.734 614.4777 383.3439 250.8647 171.941 121.2043
 84.56116 62.01151 45.09928 33.82446 25.36835 19.73094 19.73094 19.73094
 19.73094 19.73094 19.73094 19.73094 19.73094 19.73094
 19.73094 16.91223 19.73094 19.73094 19.73094 19.73094 16.91223 19.73094
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
 16.91223 14.09353 16.91223 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 16.91223 16.91223
 16.91223 16.91223 16.91223 16.91223 16.91223
 3737.603 3740.422 3746.059 3751.697 3760.153 3768.609 3779.884 3793.977
 3805.252 3819.345 3833.439 3850.351 3867.263 3884.176
 3903.907 3926.456 3949.006 3971.555 3996.924 4025.111 4050.479 4075.847
 4106.853 4137.859 4168.865 4202.689 4236.514 4270.338
 4301.344 4332.35 4366.174 4399.999 4439.46 4478.922 4524.021 4571.939
 4619.857 4667.775 4718.512 4772.068 4828.441 4884.816
 4944.009 5006.02 5070.85 5132.862 5197.692 5265.341 5330.171 5403.458
 5471.106 5544.393 5617.679 5702.24 5786.802 5882.638

5986.93 6096.859 6209.607 6319.537 6432.285 6542.214 6640.869 6736.705
 6824.084 6905.828 6970.658 7018.576 7046.763 7035.488
 6962.202 6787.442 6483.021 6006.66 5296.347 4363.355 3238.692 2277.514
 1533.376 980.9094 594.7468 377.7065 239.5899 157.8475
 101.4734 67.64892 42.28058 28.18705 19.73094 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 8.456115 8.456115 8.456115 11.27482
 8.456115 8.456115 11.27482 8.456115 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 16.91223 14.09353 14.09353 16.91223 16.91223
 3726.328 3737.603 3751.697 3762.971 3777.065 3793.977 3810.889 3830.62
 3847.532 3870.082 3886.994 3909.544 3929.275 3951.825
 3977.193 4002.561 4030.748 4056.117 4087.122 4115.31 4146.315 4177.321
 4208.327 4242.151 4273.157 4304.163 4337.987 4374.63
 4408.455 4445.098 4478.922 4512.747 4549.39 4580.396 4617.039 4656.501
 4698.781 4741.062 4786.161 4831.26 4879.178 4927.096
 4975.014 5025.751 5076.488 5130.043 5180.78 5234.335 5285.072 5330.171
 5366.814 5400.639 5434.463 5465.469 5485.2 5502.112
 5513.387 5513.387 5496.475 5462.65 5409.095 5335.809 5239.973 5104.675
 4935.553 4732.606 4509.928 4253.426 3960.281 3644.586
 3314.797 2951.184 2559.384 2122.485 1657.399 1217.681 780.7813 450.9928
 284.6892 219.859 177.5784 146.5727 118.3856 93.01727
 70.46763 50.73669 33.82446 22.54964 14.09353 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 11.27482 11.27482 11.27482 11.27482 11.27482 8.456115
 8.456115 11.27482 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
 11.27482 11.27482 11.27482 11.27482 11.27482 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 16.91223 16.91223
 14.09353 14.09353 16.91223 16.91223 16.91223
 3720.691 3740.422 3762.971 3782.702 3802.433 3822.164 3844.714 3870.082
 3889.813 3915.181 3940.55 3968.737 3994.105 4022.292
 4047.66 4078.666 4106.853 4135.041 4166.046 4194.233 4219.602 4242.151
 4267.52 4292.888 4318.256 4346.443 4371.812 4399.999
 4425.367 4450.735 4478.922 4509.928 4540.934 4571.939 4602.945 4636.77
 4664.957 4695.962 4726.969 4755.156 4783.342 4805.892
 4825.624 4836.898 4850.991 4856.629 4856.629 4850.991 4836.898 4814.348
 4786.161 4738.243 4676.232 4594.489 4495.834 4371.812
 4211.145 4019.473 3799.614 3540.294 3244.33 2906.085 2542.472 2119.666
 1685.586 1305.06 1017.552 797.6935 639.8461 527.0978
 439.718 374.8878 324.1511 284.6892 250.8647 225.4964 197.3094 171.941
 146.5727 124.023 104.2921 84.56116 73.28633 59.19281
 45.09928 31.00576 19.73094 14.09353 8.456115 5.63741 5.63741 5.63741
 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741

5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 8.456115 8.456115
8.456115 8.456115 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 8.456115 5.63741 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482 11.27482
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
11.27482 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 16.91223 16.91223 16.91223 16.91223 16.91223
3712.235 3740.422 3768.609 3793.977 3816.527 3841.895 3867.263 3892.632
3918 3946.187 3974.374 4002.561 4030.748 4058.935
4087.122 4112.491 4137.859 4160.409 4182.958 4202.689 4219.602 4239.333
4256.245 4273.157 4292.888 4312.619 4332.35 4354.899
4374.63 4397.18 4422.548 4447.917 4473.285 4495.834 4518.384 4540.934
4557.846 4569.121 4577.577 4583.214 4583.214 4574.758
4560.665 4535.296 4504.291 4464.829 4416.911 4349.262 4264.701 4160.409
4033.567 3884.176 3703.779 3498.013 3278.154 3016.014
2711.594 2364.894 2018.193 1674.311 1364.253 1085.201 862.5237 690.5828
569.3784 487.636 431.2619 391.8 357.9755 332.6072
307.2389 279.0518 253.6835 225.4964 202.9468 183.2158 166.3036 149.3914
132.4791 115.5669 98.65468 78.92374 64.83022 50.73669
39.46187 28.18705 19.73094 14.09353 8.456115 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 8.456115 8.456115 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
11.27482 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
3715.053 3748.878 3779.884 3808.071 3839.076 3864.445 3895.45 3923.637
3951.825 3982.83 4011.017 4042.023 4070.21 4098.397
4126.584 4149.134 4168.865 4185.777 4202.689 4216.783 4230.876 4244.97
4259.063 4273.157 4290.069 4304.163 4321.075 4337.987
4352.081 4363.355 4377.449 4388.724 4399.999 4402.817 4405.636 4405.636
4397.18 4385.905 4368.993 4346.443 4318.256 4284.432
4236.514 4177.321 4104.035 4016.655 3909.544 3777.065 3624.854 3452.914
3269.698 3047.02 2787.699 2494.554 2195.771 1880.076
1575.656 1288.148 1042.921 825.8806 665.2144 563.741 504.5482 465.0863
431.2619 403.0748 374.8878 349.5194 324.1511 295.964
270.5957 248.0461 225.4964 208.5842 188.8532 171.941 155.0288 135.2978
115.5669 98.65468 84.56116 70.46763 56.3741 45.09928
33.82446 25.36835 16.91223 11.27482 8.456115 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 8.456115 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 11.27482 11.27482 11.27482
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482

11.27482 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 16.91223 16.91223
16.91223 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223
3706.597 3737.603 3768.609 3802.433 3830.62 3861.626 3892.632 3923.637
3954.643 3985.649 4016.655 4050.479 4078.666 4109.672
4140.678 4163.228 4185.777 4202.689 4219.602 4233.695 4247.789 4261.882
4278.794 4295.707 4309.8 4323.894 4337.987 4352.081
4360.537 4371.812 4380.268 4383.086 4391.542 4391.542 4385.905 4377.449
4363.355 4343.625 4318.256 4284.432 4244.97 4197.052
4132.222 4056.117 3963.099 3858.807 3737.603 3588.211 3413.452 3213.324
3004.74 2756.693 2477.642 2181.678 1888.532 1592.568
1313.516 1057.014 845.6115 684.9454 586.2906 532.7352 498.9108 470.7237
439.718 403.0748 369.2503 338.2446 312.8763 287.5079
267.777 245.2273 225.4964 205.7655 186.0345 169.1223 146.5727 129.6604
115.5669 98.65468 84.56116 70.46763 56.3741 45.09928
36.64317 25.36835 19.73094 14.09353 8.456115 5.63741 2.818705 2.818705
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741 5.63741
5.63741 5.63741 5.63741 8.456115 5.63741 8.456115
8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115 8.456115
11.27482 11.27482 11.27482 11.27482 11.27482 11.27482
11.27482 11.27482 11.27482 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 14.09353 14.09353 14.09353 14.09353 14.09353
14.09353 16.91223 16.91223 16.91223 16.91223 16.91223 16.91223

LUMINÁRIA 3 PINOS



5 ANOS DE
GARANTIA



VIDA ÚTIL

100.000H




PROTEÇÃO
IP66



VAC

100 ~ 260VAC



CLASSIFICAÇÃO
O EFICIÊNCIA
ENERGÉTICA



RAJIX
ENERGY



LUMINÁRIA 3 PINOS

MODELOS DISPONÍVEIS

CÓDIGO (R000-00)	TCC	CORRENTE NOMINAL	POTÊNCIA	EFICIÊNCIA	FLUXO	PESO
RLP0505F (R02045-50-H)	5000K	530 mA	50W	150 lm/W	7500 lm	2,77 kg
RLP1005F (R010045-50-H)		1.300 A	100W	150 lm/W	15000 lm	4,90 kg
RLP1505F (R015045-50-H)		1.800 A	150W	150 lm/W	22500 lm	4,92 kg
RLP2005F (R020045-50-H)		2.300 A	200W	150 lm/W	30000 lm	5,61 kg

Desenho técnico e Dimensões (mm)

Potência(W)	C	L	A	Ø
50	410	160	92	60
100	430	180	92	60
150	530	190	92	60
200	610	220	95	60

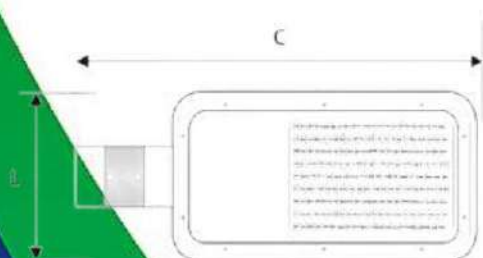

CATÁLOGO DE PRODUTOS

ITEM 2



Relé Fotocélula 10A

código	TENSÃO	CORRENTE	PROTEÇÃO	DIMENSÕES compr./larg./alt.	UNIDADE DE VENDAS	CAIXA MASTER
RF30010	Bivolt	10A	IP54	83/80/55	01	100



50-100-150-200W

LUMINÁRIA PÚBLICA LED



* Imagens meramente ilustrativas



5 ANOS DE GARANTIA



VIDA ÚTIL

100.000H



VAC

100 ~ 260VAC



PROTEÇÃO IP66



CLASSIFICAÇÃO O EFICIÊNCIA ENERGÉTICA

A iluminação pública é um aspecto importante da infraestrutura urbana e pode ter um impacto significativo na segurança e no bem-estar dos cidadãos. As **LUMINARIAS PÚBLICAS LED da RAJIX ENERGY** são uma opção popular para iluminação pública, pois oferecem vários benefícios em comparação com as tecnologias de iluminação convencionais.

Em termos de tecnologia, as luminárias **LUMINARIAS PÚBLICAS LED da RAJIX ENERGY** são projetadas para serem mais eficientes em termos de energia do que as lâmpadas VAPOR DE SÓDIO ou VAPOR METÁLICO. Elas usam diodos emissores de luz (LEDs) para produzir luz, que é mais brilhante e mais uniforme do que a luz produzida por lâmpada. Além disso, as luminárias LED têm uma vida útil mais longa do que as lâmpadas convencionais, o que significa que elas precisam ser substituídas com menos frequência.

Em relação à durabilidade, as **LUMINARIAS PÚBLICAS LED da RAJIX ENERGY** são construídas para durar muito tempo, com uma vida útil estimada em até 100.000 horas. Além disso, as luminárias LED são mais resistentes a vibrações e impactos do que as lâmpadas convencionais, o que as torna ideais para uso em áreas públicas movimentadas.

Destaques do produto

- **5 Anos de garantia**
- **Índice de proteção IP66 / Resistência IK08**
- **Estrutura em alumínio injetado**
- **Certificada no INMETRO**
- **Pintura eletrostática a pó**
- **Vida útil de 100.000 horas**

LUMINÁRIA PÚBLICA LED

POTÊNCIA
50-100-150-200W

INFORMAÇÕES TÉCNICAS

CARACTERÍSTICAS ELÉTRICAS

Tipo do LED	LED SMD 3030
Tensão de alimentação	100 ~ 260 VAC
Frequência de operação	50Hz / 60Hz
Fator de potência	≥0,92
THD	≤10%
Driver de alimentação	Invólucro em Alumínio anodizado / Proteção IP67
DPS (Classe 1)	DPS interno ao driver 10KV / 10KA
Base para Relé	3 pinos
Alimentação	Cabo PP 3x1,5mm ² (L; L/N; G)

CARACTERÍSTICAS ÓPTICAS

Abertura de lente	Tipoll - Curta
IRC	>70
Vida útil	>100.000h <i>* Comprovada através de ensaio LM-80 e projeção TM-21</i>

CARACTERÍSTICAS CONSTRUTIVAS

Índice de Proteção	IP66
Resistência mecânica	IK08
Temperatura de operação	-5°C - +50°C
Instalação	Bocal para fixação em braços de Ø48mm até Ø65mm, angulação de -5° até +5°
Material do corpo	Alumínio injetado sob pressão <i>* A.A. 369.00</i>
Pintura	Pintura eletrostática a pó com proteção UV <i>* Pintura Epóxi Poliéster</i>
Cores	Cinza
Material da lente	Lente óptica em policarbonato
Material dos elementos de fixação	Aço inoxidável 304

Normas aplicáveis

Portaria 62-2022

LUMINÁRIA PÚBLICA LED

POTÊNCIA 50-100-150-200W



MODELOS DISPONÍVEIS

CÓDIGO (MODELO)	TCC	CORRENTE NOMINAL	POTÊNCIA	EFICIÊNCIA	FLUXO	PESO
RLP0503F (YR05045-30-H)	3000K	530 mA	50W	150 lm/W	7500 lm	2,77 kg
RLP1003F (YR10045-30-H)		1.300 A	100W	150 lm/W	15000 lm	4,90 kg
RLP1503F (YR15045-30-H)		1.800 A	150W	150 lm/W	22500 lm	4,92 kg
RLP2003F (YR20045-30-H)		2.300 A	200W	150 lm/W	30000 lm	5,61 kg
RLP0504F (YR05045-40-H)	4000K	530 mA	50W	150 lm/W	7500 lm	2,77 kg
RLP1004F (YR10045-40-H)		1.300 A	100W	150 lm/W	15000 lm	4,90 kg
RLP1504F (YR15045-40-H)		1.800 A	150W	150 lm/W	22500 lm	4,92 kg
RLP2004F (YR20045-40-H)		2.300 A	200W	150 lm/W	30000 lm	5,61 kg
RLP0505F (YR05045-50-H)	5000K	530 mA	50W	150 lm/W	7500 lm	2,77 kg
RLP1005F (YR10045-50-H)		1.300 A	100W	150 lm/W	15000 lm	4,90 kg
RLP1505F (YR15045-50-H)		1.800 A	150W	150 lm/W	22500 lm	4,92 kg
RLP2005F (YR20045-50-H)		2.300 A	200W	150 lm/W	30000 lm	5,61 kg
RLP0506F (YR05045-60-H)	6500K	530 mA	50W	150 lm/W	7500 lm	2,77 kg
RLP1006F (YR10045-60-H)		1.300 A	100W	150 lm/W	15000 lm	4,90 kg
RLP1506F (YR15045-60-H)		1.800 A	150W	150 lm/W	22500 lm	4,92 kg
RLP2006F (YR20045-60-H)		2.300 A	200W	150 lm/W	30000 lm	5,61 kg

* Valores de eficiência podem variar em $\pm 10\%$ com relação ao valor nominal

Desenho técnico e Dimensões (mm)

Potência(W)	C	L	A	Ø
50	410	160	92	60
100	430	180	92	60
150	530	190	92	60
200	610	220	95	60

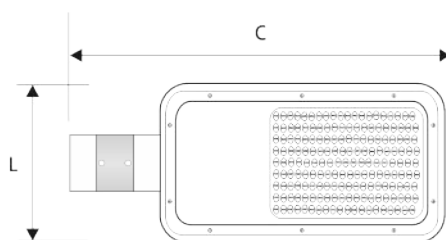

CERTIFICADO / CERTIFICATE BRA25/00267

SGS Order Ref. BRA-CERT250200145-01 | Family Ref.: 001

310
SGS

Empresa Solicitante / Applicant

Rajix Energy Ltda.

CNPJ: 57.171.302/0001-40

Rua XV de Novembro, 964 - Conj 30 Andar 03 Cond Inter Walter Spreng, Centro, 80.060-000, Curitiba, PR, Brazil

Empresa Fabricante / Manufacturer

Normas de Referência / Standards

Portaria INMETRO n.º 62, de 17 de fevereiro de 2022 -

Escopo da Certificação / Scope of Certification

Luminaria LED para Vias Públicas / Road and street luminaire with LED module



Data de emissão / Issue date

12/03/2025

Data de revisão / Revision date

12/03/2025

Data de validade / Valid until

12/03/2029

Modelo de Certificação / Certification Model: 5

A validade deste Certificado de Conformidade está atrelada à realização das avaliações de manutenção e tratamento de possíveis não conformidades de acordo com as orientações da SGS previstas no RAC específico. Para verificação da condição atualizada de regularidade deste Certificado de Conformidade deve ser consultado o banco de dados de produtos e serviços certificados do INMETRO.

The validity of this Certificate depends upon the fulfillment of the surveillance process and the resolution of any non eventual non conformity, in accordance with the guidelines from SGS foreseen in specific RAC. To check the updated condition and regularity of this Certificate, INMETRO's database for certified products and services shall be consulted.

Autorizado por

Luiz Ferri

Business Unit Sr Manager

SGS do Brasil Ltda.

CNPJ: 33.182.809/0083-87

Av. Piracema, 1341 - Galpão Horizon - 2º Andar, Tamboré

CEP 06460-030, Barueri/SP, Brasil

Fone: +55 11 4000-2552

www.sgsgroup.com.br

Certificado de Conformidade válido somente acompanhado das páginas de 1 a 7


This Conformity Certificate is valid only with the pages 1 to 7

Página / Page 1 / 7

**Certificação
de Produtos**



OCP 0040

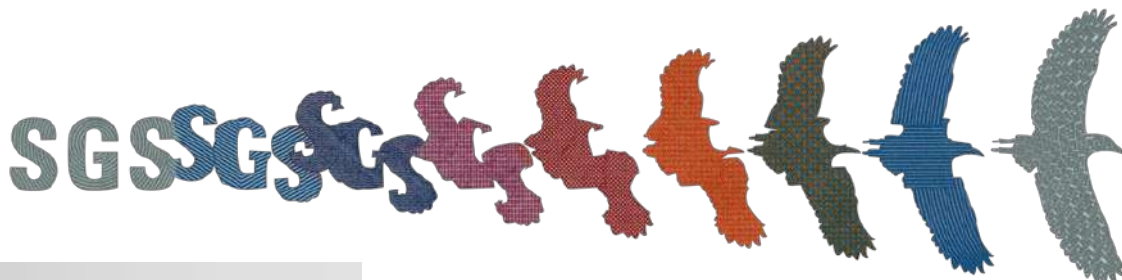

Este certificado é emitido pela SGS e está sujeito às suas Condições Gerais de Fornecimento disponíveis em www.sgs.com/terms_and_conditions.htm. Atenção especial deverá ser dada aos elementos relativos às limitações acerca da responsabilidade, indenização e jurisdição ora estabelecidos. A autenticidade deste documento poderá ser verificada junto a SGS. Qualquer alteração não autorizada, falsificação, contrafação do conteúdo ou da aparência deste documento é ilegal e os responsáveis serão processados na integral extensão da lei.

This certificate is issued by the company under its General Conditions for Certification Services accessible at www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitations of liability defined therein and in the Test Report here above mentioned which findings are reflected in this Certificate. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Relatórios de Ensaios / Test Report References

Laboratório/ Laboratory	Número do Relatórios/ Test Report No	Data de emissão/ Issue Date
SGS Guangzhou	GZEE240300111201	18/10/2024
SGS Guangzhou	GZEM240900564101	14/10/2024

Data da Auditoria de Fábrica / Factory Inspection Date: 08/04/2024**Data da Auditoria de SAC / Customer Services Inspection Date:** 17/12/2024**Histórico de Revisões / Revision History**

Revisão 00 - 12/03/2025 - Inicial

Informações Adicionais / Additional Information

-

Família / Family

Luminária LED/Zhongshun - 3030/IP66/100000h

Especificações do Produto / Product Specifications

Marca / Trademark	Modelo / Model	Descrição Técnica / Technical Description	Código de Barras / Bar Code
RAJIX	YR05045-30-H	Luminária Pública LED; 50W; 7500lm; 150lm/W; FP>0,92; 3000K; 100-260V; 50/60Hz	7898727313601
RAJIX	YR05045-40-H	Luminária Pública LED; 50W; 7500lm; 150lm/W; FP>0,92; 4000K; 100-260V; 50/60Hz	7898727313656
RAJIX	YR05045-50-H	Luminária Pública LED; 50W; 7500lm; 150lm/W; FP>0,92; 5000K; 100-260V; 50/60Hz	7898727313700
RAJIX	YR05045-60-H	Luminária Pública LED; 50W; 7500lm; 150lm/W; FP>0,92; 6500K; 100-260V; 50/60Hz	7898727313755
RAJIX	YR10045-30-H	Luminária Pública LED; 100W; 15000lm; 150lm/W; FP>0,92; 3000K; 100-260V; 50/60Hz	7898727313618
RAJIX	YR10045-40-H	Luminária Pública LED; 100W; 15000lm; 150lm/W; FP>0,92; 4000K; 100-260V; 50/60Hz	7898727313663
RAJIX	YR10045-50-H	Luminária Pública LED; 100W; 15000lm; 150lm/W; FP>0,92; 5000K; 100-260V; 50/60Hz	7898727313717
RAJIX	YR10045-60-H	Luminária Pública LED; 100W; 15000lm; 150lm/W; FP>0,92; 6500K; 100-260V; 50/60Hz	7898727313762

SGS do Brasil Ltda.
CNPJ: 33.182.809/0083-87
Av. Piracema, 1341 - Galpão Horizon - 2º Andar, Tamboré
CEP 06460-030, Barueri/SP, Brasil
Fone: +55 11 4000-2552
www.sgsgroup.com.br

Página / Page 2 / 7

Esta página é parte integrante do certificado e não pode ser separado.
This page is an integral part of the certificate and is not valid when separate.



RAJIX	YR15045-30-H	Luminária Pública LED; 150W; 22500lm; 150lm/W; FP>0,92; 3000K; 100-260V; 50/60Hz	7898727313625
RAJIX	YR15045-40-H	Luminária Pública LED; 150W; 22500lm; 150lm/W; FP>0,92; 4000K; 100-260V; 50/60Hz	7898727313670
RAJIX	YR15045-50-H	Luminária Pública LED; 150W; 22500lm; 150lm/W; FP>0,92; 5000K; 100-260V; 50/60Hz	7898727313724
RAJIX	YR15045-60-H	Luminária Pública LED; 150W; 22500lm; 150lm/W; FP>0,92; 6500K; 100-260V; 50/60Hz	7898727313779
RAJIX	YR20045-30-H	Luminária Pública LED; 200W; 30000lm; 150lm/W; FP>0,92; 3000K; 100-260V; 50/60Hz	7898727313632
RAJIX	YR20045-40-H	Luminária Pública LED; 200W; 30000lm; 150lm/W; FP>0,92; 4000K; 100-260V; 50/60Hz	7898727313687
RAJIX	YR20045-50-H	Luminária Pública LED; 200W; 30000lm; 150lm/W; FP>0,92; 5000K; 100-260V; 50/60Hz	7898727313731
RAJIX	YR20045-60-H	Luminária Pública LED; 200W; 30000lm; 150lm/W; FP>0,92; 6500K; 100-260V; 50/60Hz	7898727313786
RAJIX	YR24045-30-H	Luminária Pública LED; 240W; 36000lm; 150lm/W; FP>0,92; 3000K; 100-260V; 50/60Hz	7898727313649
RAJIX	YR24045-40-H	Luminária Pública LED; 240W; 36000lm; 150lm/W; FP>0,92; 4000K; 100-260V; 50/60Hz	7898727313694
RAJIX	YR24045-50-H	Luminária Pública LED; 240W; 36000lm; 150lm/W; FP>0,92; 5000K; 100-260V; 50/60Hz	7898727313748
RAJIX	YR24045-60-H	Luminária Pública LED; 240W; 36000lm; 150lm/W; FP>0,92; 6500K; 100-260V; 50/60Hz	7898727313793

SGS do Brasil Ltda.
 CNPJ: 33.182.809/0083-87
 Av. Piracema, 1341 - Galpão Horizon - 2º Andar, Tamboré
 CEP 06460-030, Barueri/SP, Brasil
 Fone: +55 11 4000-2552
 www.sgsgroup.com.br

Página / Page 3 / 7

Esta página é parte integrante do certificado e não pode ser separado.
 This page is an integral part of the certificate and is not valid when separate.




Etiquetas ENCE / ENCE Labels

SGS do Brasil Ltda.
 CNPJ: 33.182.809/0083-87
 Av. Piracema, 1341 - Galpão Horizon - 2º Andar, Tamboré
 CEP 06460-030, Barueri/SP, Brasil
 Fone: +55 11 2664-9595 / Fax: +55 11 3883-8904
 www.sgs.com.br

Página / Page 4 / 7

Esta página é parte integrante do certificado e não pode ser separado.
 This page is an integral part of the certificate and is not valid when separate.



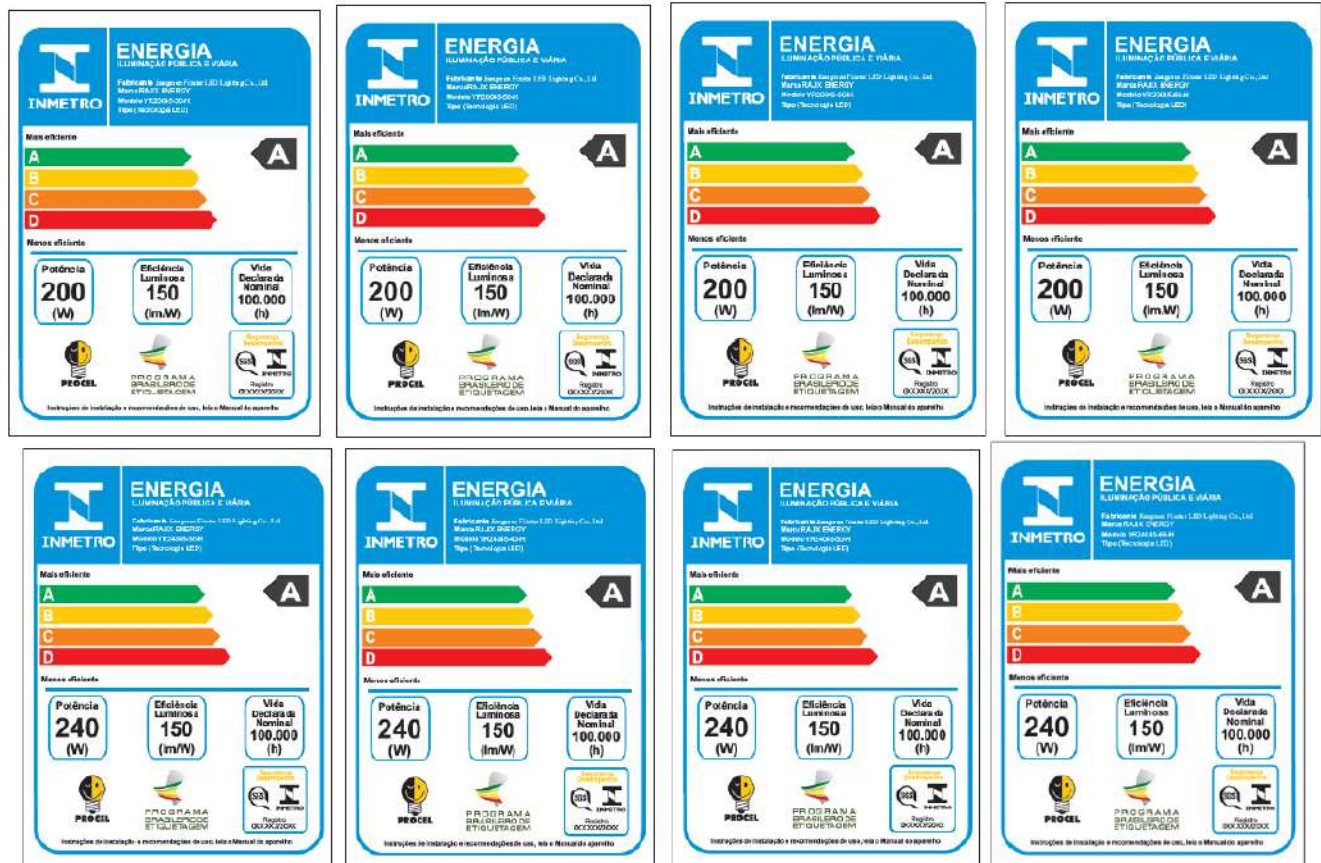

SGS do Brasil Ltda.
 CNPJ: 33.182.809/0083-87
 Av. Piracema, 1341 - Galpão Horizon - 2º Andar, Tamboré
 CEP 06460-030, Barueri/SP, Brasil
 Fone: +55 11 2664-9595 / Fax: +55 11 3883-8904
 www.sgs.com.br

Página / Page 5 / 7

Esta página é parte integrante do certificado e não pode ser separado.
 This page is an integral part of the certificate and is not valid when separate.



1 - DENOMINAÇÃO COMERCIAL	
MARCA	RAJIX
FORNECEDOR	Rajix Comercial Ltda.
FABRICANTE	

2 - IDENTIFICAÇÃO DA FAMÍLIA	
FAMÍLIA	Luminária LED/Zhongshun - 3030/IP66/100000h
MARCA/MODELO DO LED	Zhongshun - 3030
TIPO DA LUMINÁRIA	Luminária LED
VIDA DECLARADA (h)	100000h

(*) Composição do Código da Família:

LUMINÁRIA TECNOLOGIA LED: Tecnologia de luminária / Marca e Modelo do LED / IP da luminária / Vida nominal

LUMINÁRIA COM LÂMPADA DESCARGA: Tecnologia de luminária / Tipo de lâmpada / Tipo de refletor e difusor / IP da Luminária / Vida nominal

CÓDIGO BARRAS	MODELO	TENSÃO DE ENSAIO (V)	FREQ.(Hz)	POTÊNCIA(W)	FATOR DE POTÊNCIA	FLUXO LUMINOSO (lm)	RENDIMENTO ÓTICO (***)(lm/W)	EE (**)(lm/W)	IRC	TCQ(K)	Nº RELATÓRIO ENSAIO/LABORATÓRIO
7898727313601	YR05045-30-H	127-220	50/60	50	>0,92	7500	-	150	≥70	3000	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313656	YR05045-40-H	127-220	50/60	50	>0,92	7500	-	150	≥70	4000	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313700	YR05045-50-H	127-220	50/60	50	>0,92	7500	-	150	≥70	5000	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313755	YR05045-60-H	127-220	50/60	50	>0,92	7500	-	150	≥70	6500	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313618	YR10045-30-H	127-220	50/60	100	>0,92	15000	-	150	≥70	3000	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313663	YR10045-40-H	127-220	50/60	100	>0,92	15000	-	150	≥70	4000	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313717	YR10045-50-H	127-220	50/60	100	>0,92	15000	-	150	≥70	5000	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313762	YR10045-60-H	127-220	50/60	100	>0,92	15000	-	150	≥70	6500	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313625	YR15045-30-H	127-220	50/60	150	>0,92	22500	-	150	≥70	3000	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313670	YR15045-40-H	127-220	50/60	150	>0,92	22500	-	150	≥70	4000	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313724	YR15045-50-H	127-220	50/60	150	>0,92	22500	-	150	≥70	5000	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313779	YR15045-60-H	127-220	50/60	150	>0,92	22500	-	150	≥70	6500	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313632	YR20045-30-H	127-220	50/60	200	>0,92	30000	-	150	≥70	3000	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313687	YR20045-40-H	127-220	50/60	200	>0,92	30000	-	150	≥70	4000	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313731	YR20045-50-H	127-220	50/60	200	>0,92	30000	-	150	≥70	5000	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313786	YR20045-60-H	127-220	50/60	200	>0,92	30000	-	150	≥70	6500	GZEE2403001112 01:GZEM240900 564101/SGS G2
7898727313649	YR24045-30-H	127-220	50/60	240	>0,92	36000	-	150	≥70	3000	GZEE2403001112 01:GZEM240900 564101/SGS G2

SGS do Brasil Ltda.

CNPJ: 33.182.809/0083-87

Av. Piracema, 1341 - Galpão Horizon - 2º Andar, Tamboré

CEP 06460-030, Barueri/SP, Brasil

Fone: +55 11 2664-9595 / Fax: +55 11 3883-8904

www.sgsgroup.com.br

Página / Page 6 / 7

Esta página é parte integrante do certificado e não pode ser separado.

This page is an integral part of the certificate and is not valid when separate.

Certificação
de Produtos

OCP 0040

7898727313694	YR24045-40-H	127-220	50/60	240	>0,92	36000	-	150	≥70	4000	GZEE2403001112 01;GZEM240900 564101/SGS G2
7898727313748	YR24045-50-H	127-220	50/60	240	>0,92	36000	-	150	≥70	5000	GZEE2403001112 01;GZEM240900 564101/SGS G2
7898727313793	YR24045-60-H	127-220	50/60	240	>0,92	36000	-	150	≥70	6500	GZEE2403001112 01;GZEM240900 564101/SGS G2

(**) EE – Eficiência Energética. (***) Aplicável somente para Luminárias com lâmpadas de descarga

SGS do Brasil Ltda.
CNPJ: 33.182.809/0083-87
Av. Piracema, 1341 - Galpão Horizon - 2º Andar, Tamboré
CEP 06460-030, Barueri/SP, Brasil
Fone: +55 11 2664-9595 / Fax: +55 11 3883-8904
www.sgsgroup.com.br

Página / Page 7 / 7

Esta página é parte integrante do certificado e não pode ser separado.
This page is an integral part of the certificate and is not valid when separate.





Thelma Leoni Sabim

Tradutora Pública e Intérprete Comercial – Inglês
Matrícula 12/219-T - JUCEPAR

Rua Cel. José Carvalho de Oliveira, 268
81570-160 Curitiba – PR BRASIL
Tel.: +55 41 3276-5659 / +55 41 99676-7297
E-mail: thelma@thelmasabim.com

Livro: 17

Tradução nº: 1618

Folha 53

Documento: Relatório de Ensaio ANSI/IES LM-80-15-----

***Certifico e dou fé** para os devidos fins que me foi apresentado o documento em inglês acima referenciado o qual traduzo para o vernáculo no seguinte teor:*

[cabeçalho repetido em todas as páginas]

[ícone] **Meide®**

Guangdong Meide Testing Technology Co., Ltd.

NvLap® [ícone] ilac-MRA

TESTING

CÓDIGO NVLAP LAB: 600177-0

RELATÓRIO DE ENSAIO ANSI/IES LM-80-15

Métodos aprovados para medição do fluxo luminoso e manutenção de cores dos encapsulamentos, matrizes e módulos LED

Cliente.....: Shenzhen Tongyifang Optoelectronic Technology Co., Ltd.

Endereço.....: Edifício No.4, Parque Industrial XinLianHe, Estrada JinCheng, Vila ShaJing,
Distrito de BaoAn, Cidade de ShenZhen

Modelo em teste.....: SE3

Nome da marca.....: [imagem do logo] TYF LED

Laboratório de ensaios : Guangdong Meide Testing Technology Co., Ltd.

Endereço.....: 1º andar, Área B, Parque Industrial Jinbaisheng, Sede na Estrada 2, Lago Songshan, Zona de Desenvolvimento Industrial de Alta Tecnologia, Cidade de Dongguan, Província de Guangdong, China.

Local do ensaio.....: Mesmo que acima

Relatório No.....: C02A18100404L01001

Data do teste.....: 02/11/2018 a 25/11/2020

Data do relatório...: 04/12/2020

Testado por:

[assinatura]

Tim Qian/ Engenheiro de Teste

Verificado por:

[assinatura]

Luke Lei/ Eng. de Projetos

[ícone] **Meide**

* CERTIFICADO *

Guangdong Meide Testing Technology Co., Ltd.

Aprovado por:

[assinatura]

Jessie Li/Gerente Técnica

Nota 1: os dados do ensaio são válidos apenas para a(s) amostra(s) testada. Este relatório de ensaio foi preparado para o cliente acima indicado e para o dispositivo aqui descrito. Ele não pode ser duplicado nem usado parcialmente sem o consentimento prévio por escrito da Guangdong Meide Testing Technology Co., Ltd. Este relatório não deve ser usado pelo cliente para reivindicar certificação, aprovação ou endosso do produto pelo NVLAP.NIST ou qualquer agência do Governo Federal. Nota 2: Este relatório não implica certificação, aprovação ou endosso do produto pela NVLAP, NIST ou qualquer agência do Governo Federal.

Relatório nº: C02A18100404L01001

Página 1 de 18

[rodapé repetido em cada página]

Laboratório: Guangdong Meide Testing Technology Co., Ltd.

Endereço: 1º andar, Área B, Parque Industrial Jinbaisheng, Sede Estrada 2, Lago Songshan, Zona de Desenvolvimento de Alta Tecnologia Industrial

Cidade de Dongguan, Província de Guangdong, China.

Tel: 86-769-8507 5888 Fax: 86-769-8507 5898 E-mail: meidetest@meidetest.com <http://www.meidetest.com/>


Thelma Leoni Sabim

Tradutora Pública e Intérprete Comercial – Inglês
Matrícula 12/219-T - JUCEPAR

Rua Cel. José Carvalho de Oliveira, 268
81570-160 Curitiba – PR BRASIL
Tel.: +55 41 3276-5659 / +55 41 99676-7297
E-mail: thelma@thelmasabim.com

Livro: 17

Tradução nº: 1618

Folha 54

Folha de rosto ENERGY STAR® LM-80

Informações Administrativas

Série de subcomponentes testada:	Não aplicável
Número do modelo do subcomponente testado:	SE3
Data de emissão do relatório:	04/12/2020
Data de revisão do relatório (se aplicável):	Não aplicável
Data início do ensaio:	02/11/2018
Data conclusão do ensaio:	25/11/2020

Identificação do Dispositivo em Teste (DUT)

Nome do fabricante do DUT:	Shenzhen Tongyifang Optoelectronic Technology Co., Ltd.
Identificação do DUT, p.ex. núm. do modelo:	SE3
Descrição do DUT, inclusive se o dispositivo for um encapsulamento ou módulo de LED:	Encapsulamento LED

Características do DUT

Potência total de entrada (W):	2W
Densidade média de corrente por pastilha LED (mA/mm ²):	301,95 mA/mm ²
Densidade média de potência por pastilha LED (W/mm ²):	1,006 W/mm ²
IRC (Ra) representativo do conjunto de amostras em teste: (Indica se o valor relatado é o valor médio ou mediano do conjunto de amostras, ou por unidade)	80
Espaçamento mínimo entre as bordas da pastilha:	0,19 mm

Relatório nº: C02A18100404L01001

Página 2 de 18



Thelma Leoni Sabim

Tradutora Pública e Intérprete Comercial – Inglês
Matrícula 12/219-T - JUCEPAR

Rua Cel. José Carvalho de Oliveira, 268
81570-160 Curitiba – PR BRASIL
Tel.: +55 41 3276-5659 / +55 41 99676-7297
E-mail: thelma@thelmasabim.com

Livro: 17

Tradução nº: 1618

Folha 55

Índice

1. Informações Gerais.....	4
1.1 Descrição das fontes de luz de LED.....	4
1.2 Padrões usados.....	5
1.3 Lista de equipamentos do ensaio.....	5
1.4 Nível de dreno.....	5
1.5 Condições ambientais para teste de manutenção.....	5
1.6 Método de medição fotométrica.....	5
1.7 Conjunto de amostras.....	6
2. SUMÁRIO DOS RESULTADOS DO TESTE.....	7
3. Dados do ensaio.....	10
3.1 Conjunto de dados 1, 85°C, 300mA (manutenção de lúmen).....	10
3.2 Conjunto de dados 1, 85°C, 300mA (manutenção do fluxo de fótons fotossintéticos).....	11
3.3 Conjunto de dados 1, 85°C, 300mA (tensão direta).....	12
3.4 Conjunto de dados 1, 85°C, 300mA (variação de cromaticidade).....	13
3.5 Conjunto de dados 2, 105°C, 300mA (manutenção de lúmen).....	14
3.6 Conjunto de dados 2, 105°C, 300mA (manutenção do fluxo de fótons fotossintéticos).....	15
3.7 Conjunto de dados 2, 105°C, 300mA (tensão direta).....	16
3.8 Conjunto de dados 2, 105°C, 300mA (variação de cromaticidade).....	17
4 . FOTO DO EQUIPAMENTO EM TESTE.....	18
4.1 Dimensões mecânicas.....	18
4.2 Foto do equipamento em teste.....	18

Relatório nº: C02A18100404L01001

Página 3 of 18



Thelma Leoni Sabim

Tradutora Pública e Intérprete Comercial – Inglês
Matrícula 12/219-T - JUCEPAR

Rua Cel. José Carvalho de Oliveira, 268
81570-160 Curitiba – PR BRASIL
Tel.: +55 41 3276-5659 / +55 41 99676-7297
E-mail: thelma@thelmasabim.com

Livro: 17

Tradução nº: 1618

Folha 56

1. Informações Gerais

1.1 Descrição das fontes de luz de LED

Tamanho da amostra:

Foram recebidas amostras de 50 unidades em 01/11/2018. As amostras foram numeradas de S1 a S25 e S26 a S50.

Fabricação:	Shenzhen Tongyifang OptoelectronicTechnologyCo., Ltd
Número de peça:	SE3
Tipo de peça:	Encapsulamento LED
Nível do dreno:	CC 300mA
TCC (Temperatura de Cor Correlata) nominal:	2700K
Potência:	2W
IRC (Índice de Renderização de Cores):	80

Método de amostragem:

As amostras de LED para testes IESNA LM-80 consistem em unidades construídas a partir de três lotes de fabricação, com cada lote composto de diferentes lotes de wafers produzidos em dias não consecutivos. Esses lotes de fabricação são escolhidos para representar uma ampla distribuição paramétrica.

Família de produtos abrangidos por este relatório:

De acordo com os Requisitos da ENERGY STAR® para o Uso de Dados LM-80, os seguintes produtos podem ser cobertos por este relatório com base nas informações e declarações fornecidas pelo fabricante. As informações desses modelos mostram que os produtos cobertos atendem os requisitos da seção 4 dos Requisitos da ENERGY STAR® para o uso de dados LM-80 (28 de setembro de 2017)

Este relatório abrange os seguintes modelos:

Nome do modelo	Corrente (mA)	Potência: (W)	Qtde de pastilhas	Densidade de corrente por pastilha (mA/mm ²)	Densidade de potência (W/mm ²)	Espacamento pastilhas (mm)	Corrente do driver da pastilha (mA)
Modelo em teste SE3	300	2	4	301,95	0,0022	0,19	150
SE32022	300	2	4	301,95	0,0022	0,19	150
SE32041	150	2	4	301,95	0,0022	0,19	150
SE32014	600	2	4	301,95	0,0022	0,19	150
SE31531	150	1.5	3	301,95	0.0017	0,19	150
SE31513	450	1.5	3	301,95	0.0017	0,19	150
SE31021	150	1	2	301,95	0.0011	0,19	150
SE31012	300	1	2	301,95	0.0011	0,19	150

Exclusão de responsabilidade:

A veracidade e precisão de todas as informações técnicas acima para os produtos LED cobertos são garantidas pelo fabricante da fonte de luz LED. Guangdong Meide Testing TechnologyCo., Ltd. não é responsável tampouco oferece qualquer garantia pela veracidade das informações técnicas.

Relatório nº: C02A18100404L01001

Página 4 de 18

**1.2 Padrões usados**

- Método aprovado pela IES ANSI/IES LM-80-15 para fluxo luminoso e manutenção de cores dos encapsulamentos, matrizes e módulos
- Requisitos da ENERGY STAR® para o uso de dados LM-80 (Este padrão não foi credenciado pelo NVLAP)

1.3 Lista de equipamentos do ensaio

Equipamento do ensaio	No. de série	No. modelo	Vcto. da calibração
Sistema de esfera integradora	MD-E033	0.5m	19/05/2021
Fonte de luz padrão	MD-E034	D062	19/05/2021
Radiômetro de matriz de alta precisão	MD-E011	HAAS-3000	2021/09/29
Medidor digital de energia	MD-E008	PF310	2021/09/29
Fonte de alimentação CC estabilizada digital de precisão	MD-E009	WY305	2021/09/29
Testador de temperatura	MD-E038	UFS-D8036	17/06/2021

Declaração de rastreabilidade: Guangdong Meide Testing Technology Co., Ltd. atestou que toda a calibração foi realizada usando padrões adequados rastreáveis aos padrões primários nacionais e ao Sistema Internacional de Unidade (SI).

1.4 Nível de dreno

As amostras são acionadas com corrente contínua constante (CC) durante testes de manutenção, medições fotométricas e elétricas. O valor da corrente foi regulado dentro de $\pm 3\%$ do valor especificado pelo fabricante durante o teste de manutenção, e ficou dentro de $\pm 0,5\%$ durante o teste de medição fotométrica e elétrica.

1.5 Condições ambientais para teste de manutenção

Para o teste de manutenção do lúmen, as amostras dentro de um conjunto de dados foram instaladas em placas de resfriamento em câmaras térmicas com fluxo mínimo de ar ambiente. A temperatura do invólucro e a temperatura ambiente foram monitoradas por termopares, um dos quais foi soldado ao ponto mais frio do invólucro do dispositivo em teste (TMP do LED), enquanto o outro foi montado a uma distância de 5 mm acima do local do ponto de medição de temperatura.

Durante o ensaio de vida, os pontos de medição de temperatura (TMP) dos LEDs mais frios foram mantidos a uma temperatura maior ou igual a 2°C abaixo da temperatura nominal do invólucro. O ar circundante foi mantido a uma temperatura maior ou igual a 5°C abaixo da temperatura nominal do invólucro. Os termopares foram protegidos da radiação óptica direta do dispositivo em teste e estão em conformidade com a ASTM E230 Tabela 1 "Limites Especiais".

As amostras foram conectadas à fonte de alimentação CC em circuitos em série com corrente constante. A corrente direta foi regulada dentro de $\pm 3\%$ do valor especificado pelo fabricante.

A umidade relativa dentro da câmara foi mantida abaixo de 65% durante o ensaio.

Para medição fotométrica, a temperatura ambiente durante o ensaio foi ajustada para $25^\circ\text{C} \pm 2^\circ\text{C}$, UR < 65%.

1.6 Método de medição fotométrica

A esfera integradora e o radiômetro foram usados para medir o fluxo luminoso e foi usada a medição da coordenada de cromaticidade $u'v'$.2n e a amostra foi energizada pela fonte de alimentação CC. A corrente direta foi regulada dentro de $\pm 0,5\%$ do valor nominal. O sistema de teste foi calibrado usando lâmpada halógena de referência. A temperatura ambiente durante o teste foi ajustada para $25^\circ\text{C} \pm 2^\circ\text{C}$, umidade relativa < 65%. O ponto de medição de temperatura foi localizado na esfera e a temperatura foi detectada por uma sonda de temperatura.

A incerteza das medições de saída de luz (fluxo luminoso) é $U = 2,1\%$ ($K = 2$), no nível de confiança de 95%. A incerteza das medições de temperatura de cor correlacionadas é $U = 18K$ ($K = 2$), no nível de confiança de 95%. A incerteza da temperatura é $U = 0,5^\circ\text{C}$ ($K = 2$), no nível de confiança de 95%.



Thelma Leoni Sabim

Tradutora Pública e Intérprete Comercial – Inglês
Matrícula 12/219-T - JUCEPAR

Rua Cel. José Carvalho de Oliveira, 268
81570-160 Curitiba – PR BRASIL
Tel.: +55 41 3276-5659 / +55 41 99676-7297
E-mail: thelma@thelmasabim.com

Livro: 17

Tradução nº: 1618

Folha 58

1.7 Conjunto de amostras

Conjunto de dados 1:85°C,300mA	
Número de peça:	SE3
Número de unidades:	25
Temp. do invólucro (TS):	>83°C
Temperatura ambiente (TA):	>80°C
Corrente de dreno do teste de vida:	300mA
Corrente de medição:	300mA

Conjunto de dados 2:105°C,300mA	
Número de peça:	SE3
Número de unidades:	25
Temp. do invólucro (TS):	>103°C
Temperatura ambiente (TA):	>100°C
Corrente de dreno do teste de vida:	300mA
Corrente de medição:	300mA

Relatório N°: C02A18100404L01001

Página 6 de 18



2. SUMÁRIO DOS RESULTADOS DO ENSAIO

Conj. dados:	Tamanho amostra	Falhas observadas:	Intervalo do teste	Duração do teste	α	β	Duração L70 TM-21 relatada	Duração L90 TM-21 relatada
--------------	-----------------	--------------------	--------------------	------------------	----------	---------	----------------------------	----------------------------

Média da manutenção do fluxo (porcentagem do fluxo luminoso inicial)

[2 tabelas sendo que apenas os cabeçalhos constam na tradução. Para valores, ver o original]

Conj. dados	1000 h	2000 h	3000 h	4000 h	5000 h	6000 h	7000 h	8000 h	9000h
-------------	--------	--------	--------	--------	--------	--------	--------	--------	-------

Conj. dados	10000 h	11000 h	12000 h	13000 h	14000 h	15000 h	16000 h	17000 h	18000h
-------------	---------	---------	---------	---------	---------	---------	---------	---------	--------

Média da manutenção do fluxo de fótons fotossintéticos (porcentagem do fluxo de fótons fotossintéticos)

[2 tabelas sendo que apenas os cabeçalhos constam na tradução. Para valores, ver o original]

Conj. dados	1000 h	2000 h	3000 h	4000 h	5000 h	6000 h	7000 h	8000 h	9000h
-------------	--------	--------	--------	--------	--------	--------	--------	--------	-------

Conj. dados	10000 h	11000 h	12000 h	13000 h	14000 h	15000 h	16000 h	17000 h	18000h
-------------	---------	---------	---------	---------	---------	---------	---------	---------	--------

Média da variação de cromaticidade ($\Delta u'v'$)

[2 tabelas sendo que apenas os cabeçalhos constam na tradução. Para valores, ver o original]

Conj. dados	1000 h	2000 h	3000 h	4000 h	5000 h	6000 h	7000 h	8000 h	9000h
-------------	--------	--------	--------	--------	--------	--------	--------	--------	-------

Conj. dados	10000 h	11000 h	12000 h	13000 h	14000 h	15000 h	16000 h	17000 h	18000h
-------------	---------	---------	---------	---------	---------	---------	---------	---------	--------

**Thelma Leoni Sabim**

Tradutora Pública e Intérprete Comercial – Inglês
Matrícula 12/219-T - JUCEPAR

Rua Cel. José Carvalho de Oliveira, 268
81570-160 Curitiba – PR BRASIL
Tel.: +55 41 3276-5659 / +55 41 99676-7297
E-mail: thelma@thelmasabim.com

Livro: 17

Tradução nº: 1618

Folha 60

Manutenção do fluxo (%)
[gráfico]

Manutenção do PPF (%)
[gráfico]

Relatório N°: C02A18100404L01001

Página 8 de 18

Varição de cromaticidade ($\Delta u' v'$)
[gráfico]

Relatório N°: C02A18100404L01001

Página 9 de 18

3. Dados do ensaio

3.1 Conjunto de dados 1, 85°C, 300mA (manutenção de lúmen)
[tabela]

Relatório N°: C02A18100404L01001

Página 10 de 18

3.2 Conjunto de dados 1, 85°C, 300mA (manutenção do fluxo de fótons fotossintéticos)
[tabela]

Relatório N°: C02A18100404L01001

Página 11 de 18

3.3 Conjunto de dados 1, 85°C, 300mA (tensão direta)
[tabela]

Relatório N°: C02A18100404L01001

Página 12 de 18

3.4 Conjunto de dados 1, 85°C, 300mA (variação de cromaticidade)
[tabela]

Relatório N°: C02A18100404L01001

Página 13 de 18

3.5 Conjunto de dados 2, 105°C, 300mA (manutenção de lúmen)
[tabela]

Relatório N°: C02A18100404L01001

Página 14 de 18

3.6 Conjunto de dados 2, 105°C, 300mA (manutenção do fluxo de fótons fotossintéticos)
[tabela]

Relatório N°: C02A18100404L01001

Página 15 de 18



Thelma Leoni Sabim

Tradutora Pública e Intérprete Comercial – Inglês
Matrícula 12/219-T - JUCEPAR

Rua Cel. José Carvalho de Oliveira, 268
81570-160 Curitiba – PR BRASIL
Tel.: +55 41 3276-5659 / +55 41 99676-7297
E-mail: thelma@thelmasabim.com

Livro: 17

Tradução nº: 1618

Folha 61

3.7 Conjunto de dados 2, 105°C, 300mA (tensão direta)

[tabela]

Relatório N°: C02A18100404L01001

Página 16 de 18

3.8 Conjunto de dados 2, 105°C, 300mA (variação de cromaticidade)

[tabela]


Relatório N°: C02A18100404L01001

Página 17 de 18

4. FOTO DO EQUIPAMENTO EM TESTE

4.1 Dimensões mecânicas

[imagem]



Todas as dimensões estão em milímetros

4.2 Foto do equipamento em teste

[imagem]

***** FIM DO RELATÓRIO DE ENSAIO *****

Relatório N°: C02A18100404L01001

Página 18 de 18

Esta tradução não implica julgamento sobre a forma, autenticidade e/ou conteúdo do documento traduzido, conteúdo este mantido em sigilo. Qualquer evidência de viciação invalida este documento. Nada mais constava no documento, o qual fielmente traduzi, conferi, achei conforme e assino na data abaixo. Dou fé.

Curitiba, 7 de março de 2024

DOCUMENTO COM ASSINATURA DIGITAL

Thelma L Sabim
JUCEPAR 12/219-T

PROTOCOLO DE ASSINATURA(S)

O documento público acima foi emitido e assinado digitalmente por Thelma Leoni Sabim, tradutora juramentada e intérprete comercial JUCEPAR 12/219-T, na plataforma IziSign. Para verificar a assinatura clique no link: <https://www.portaldeassinaturas.com.br/Verificar/F731-54AE-B10E-88A0> ou vá até o site <https://www.portaldeassinaturas.com.br:443> e utilize o código abaixo para verificar a validade deste documento.

Código para verificação: F731-54AE-B10E-88A0



Hash do Documento

91E005D7263129F3D6DDAC467C2159A09347E0456169ACD9FBF857B4135E1B34

O(s) nome(s) indicado(s) para assinatura, bem como seu(s) status em 07/03/2024 é(são) :

☒ Thelma Leoni Sabim - 147.733.339-87 em 07/03/2024 22:46

UTC-03:00

Tipo: Certificado Digital





Test Report issued under the responsibility of

TEST REPORT

Ordinance no. 62 - February 17, 2022

Technical Quality Regulation And The Compliance Assessment Requirement For Luminaires For Road – Consolidated Street Lighting

Report Reference No:	GZEE2403001 11201
Tested by (name + signature):	Simon Chen <i>Simon Chen</i>
Approved by (name + signature)	Alex Tan <i>Alex Tan</i>
Date of issue:	2024-10-18
Total number of pages:	116
Testing Laboratory:	SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch
Address:	198 Kezhu Road, Science City, Economic & Technology Development Area, Guangzhou, Guangdong, China
Applicant's name:	RAJIX COMERCIAL LTDA
Address:	AV REPUBLICA ARGENTINA, 1505, SALA 2012, AGUA VERDE, CURITIBA, PARANA, BRASIL
Manufacturer's name	
Address:	
Test specification:	
Standard	Ordinance no. 62 – February 17, 2022
Test procedure.....:	INMETRO
Non-standard test method.....:	None
Test Report Form No:	62/2022_A
Test Report Form(s) Originator:	SGS-CSTC
Master TRF	2022-03-24
Test item description	LED ROAD LIGHTING
Trade Mark:	—
Factory:	
Model/Type reference:	Detail see “General product information”
Ratings:	Detail see “General product information”

**Summary of testing:**

The samples tested comply with the requirements of Ordinance no. 62 – February 17, 2022.

Models YR24045-60-L, YR24045-60-H, YR20045-40-L, YR15045-50-L, YR05045-60-L, YR15045-40-H, YR20045-50-H and YR10045-30-H were selected for the full tests at 127 V & 220 V because they have the Max. wattage and CCT. For the other models, tests were conducted according to clause 4.2.1 – 4.2.7 & 4.2.9 - 4.2.11.

Test item particulars.....:

Luminaire type: ☒ LED Luminaires / ☐ Discharge Luminaires

Mass of the equipment: Max. 2.84 kg for YR24045-60-H

Possible test case verdicts:

- test case does not apply to the test object.....: N/A

- test object does meet the requirement: P (Pass)

- test object does not meet the requirement.....: F (Fail)

Testing.....:

Date of receipt of test item.....: 2024-03-22

Date (s) of performance of tests.....: 2024-03-22 to 2024-08-27

General remarks:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(See Enclosure #)" refers to additional information appended to the report.

"(See appended table)" refers to a table appended to the report.

Throughout this report a ☐ comma / ☒ point is used as the decimal separator.

When determining for test conclusion, measurement uncertainty of tests has been considered.

This document is issued by the Company subject to its General Conditions of Service, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**General product information:**

Product information table:

No.	Model number	Ratings	Luminous intensity distributions
1.	YR24045-40-L	100 – 260 VAC, 50/60 Hz, 2.4 A, 240 W, 31200 lm, 130 lm/W, FP: ≥ 0.92 , 4000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
2.	YR20045-40-L	100 – 260 VAC, 50/60 Hz, 2 A, 200 W, 26000 lm, 130 lm/W, FP: ≥ 0.92 , 4000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
3.	YR15045-40-L	100 – 260 VAC, 50/60 Hz, 1.5 A, 150 W, 19500 lm, 130 lm/W, FP: ≥ 0.92 , 4000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
4.	YR10045-40-L	100 – 260 VAC, 50/60 Hz, 0.9 A, 100 W, 13000 lm, 130 lm/W, FP: ≥ 0.92 , 4000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
5.	YR05045-40-L	100 – 260 VAC, 50/60 Hz, 0.46 A, 50 W, 6500 lm, 130 lm/W, FP: ≥ 0.92 , 4000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
6.	YR24045-50-L	100 – 260 VAC, 50/60 Hz, 2.4 A, 240 W, 31200 lm, 130 lm/W, FP: ≥ 0.92 , 5000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
7.	YR20045-50-L	100 – 260 VAC, 50/60 Hz, 2 A, 200 W, 26000 lm, 130 lm/W, FP: ≥ 0.92 , 5000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
8.	YR15045-50-L	100 – 260 VAC, 50/60 Hz, 1.5 A, 150 W, 19500 lm, 130 lm/W, FP: ≥ 0.92 , 5000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
9.	YR10045-50-L	100 – 260 VAC, 50/60 Hz, 0.9 A, 100 W, 13000 lm, 130 lm/W, FP: ≥ 0.92 , 5000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
10.	YR05045-50-L	100 – 260 VAC, 50/60 Hz, 0.46 A, 50 W, 6500 lm, 130 lm/W, FP: ≥ 0.92 , 5000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
11.	YR24045-60-L	100 – 260 VAC, 50/60 Hz, 2.4 A, 240 W, 31200 lm, 130 lm/W, FP: ≥ 0.92 , 6500 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
12.	YR20045-60-L	100 – 260 VAC, 50/60 Hz, 2 A, 200 W, 26000 lm, 130 lm/W, FP: ≥ 0.92 , 6500 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
13.	YR15045-60-L	100 – 260 VAC, 50/60 Hz, 1.5 A, 150 W, 19500 lm, 130 lm/W, FP: ≥ 0.92 , 6500 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
14.	YR10045-60-L	100 – 260 VAC, 50/60 Hz, 0.9 A, 100 W, 13000 lm, 130 lm/W, FP: ≥ 0.92 , 6500 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited



No.	Model number	Ratings	Luminous intensity distributions
		IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Control of luminous intensity distribution: Limited
15.	YR05045-60-L	100 – 260 VAC, 50/60 Hz, 0.46 A, 50 W, 6500 lm, 130 lm/W, FP: $\geq$ 0.92, 6500 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
16.	YR24045-30-L	100 – 260 VAC, 50/60 Hz, 2.4 A, 240 W, 31200 lm, 130 lm/W, FP: $\geq$ 0.92, 3000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
17.	YR20045-30-L	100 – 260 VAC, 50/60 Hz, 2 A, 200 W, 26000 lm, 130 lm/W, FP: $\geq$ 0.92, 3000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
18.	YR15045-30-L	100 – 260 VAC, 50/60 Hz, 1.5 A, 150 W, 19500 lm, 130 lm/W, FP: $\geq$ 0.92, 3000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
19.	YR10045-30-L	100 – 260 VAC, 50/60 Hz, 0.9 A, 100 W, 13000 lm, 130 lm/W, FP: $\geq$ 0.92, 3000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
20.	YR05045-30-L	100 – 260 VAC, 50/60 Hz, 0.46 A, 50 W, 6500 lm, 130 lm/W, FP: $\geq$ 0.92, 3000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
21.	YR24045-40-H	100 – 260 VAC, 50/60 Hz, 2.65 A, 240 W, 36000 lm, 150 lm/W, FP: $\geq$ 0.92, 4000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
22.	YR20045-40-H	100 – 260 VAC, 50/60 Hz, 2.3 A, 200 W, 30000 lm, 150 lm/W, FP: $\geq$ 0.92, 4000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
23.	YR15045-40-H	100 – 260 VAC, 50/60 Hz, 1.8 A, 150 W, 22500 lm, 150 lm/W, FP: $\geq$ 0.92, 4000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
24.	YR10045-40-H	100 – 260 VAC, 50/60 Hz, 1.3 A, 100 W, 15000 lm, 150 lm/W, FP: $\geq$ 0.92, 4000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
25.	YR05045-40-H	100 – 260 VAC, 50/60 Hz, 0.53 A, 50 W, 7500 lm, 150 lm/W, FP: $\geq$ 0.92, 4000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
26.	YR24045-50-H	100 – 260 VAC, 50/60 Hz, 2.65 A, 240 W, 36000 lm, 150 lm/W, FP: $\geq$ 0.92, 5000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
27.	YR20045-50-H	100 – 260 VAC, 50/60 Hz, 2.3 A, 200 W, 30000 lm, 150 lm/W, FP: $\geq$ 0.92, 5000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
28.	YR15045-50-H	100 – 260 VAC, 50/60 Hz, 1.8 A, 150 W, 22500 lm, 150 lm/W, FP: $\geq$ 0.92, 5000 K, IRC $\geq$ 70, Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited



No.	Model number	Ratings	Luminous intensity distributions
			distribution: Limited
29.	YR10045-50-H	100 – 260 VAC, 50/60 Hz, 1.3 A, 100 W, 15000 lm, 150 lm/W, FP: ≥ 0.92 , 5000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
30.	YR05045-50-H	100 – 260 VAC, 50/60 Hz, 0.53 A, 50 W, 7500 lm, 150 lm/W, FP: ≥ 0.92 , 5000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
31.	YR24045-60-H	100 – 260 VAC, 50/60 Hz, 2.65 A, 240 W, 36000 lm, 150 lm/W, FP: ≥ 0.92 , 6500 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
32.	YR20045-60-H	100 – 260 VAC, 50/60 Hz, 2.3 A, 200 W, 30000 lm, 150 lm/W, FP: ≥ 0.92 , 6500 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
33.	YR15045-60-H	100 – 260 VAC, 50/60 Hz, 1.8 A, 150 W, 22500 lm, 150 lm/W, FP: ≥ 0.92 , 6500 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
34.	YR10045-60-H	100 – 260 VAC, 50/60 Hz, 1.3 A, 100 W, 15000 lm, 150 lm/W, FP: ≥ 0.92 , 6500 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
35.	YR05045-60-H	100 – 260 VAC, 50/60 Hz, 0.53 A, 50 W, 7500 lm, 150 lm/W, FP: ≥ 0.92 , 6500 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
36.	YR24045-30-H	100 – 260 VAC, 50/60 Hz, 2.65 A, 240 W, 36000 lm, 150 lm/W, FP: ≥ 0.92 , 3000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
37.	YR20045-30-H	100 – 260 VAC, 50/60 Hz, 2.3 A, 200 W, 30000 lm, 150 lm/W, FP: ≥ 0.92 , 3000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
38.	YR15045-30-H	100 – 260 VAC, 50/60 Hz, 1.8 A, 150 W, 22500 lm, 150 lm/W, FP: ≥ 0.92 , 3000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
39.	YR10045-30-H	100 – 260 VAC, 50/60 Hz, 1.3 A, 100 W, 15000 lm, 150 lm/W, FP: ≥ 0.92 , 3000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited
40.	YR05045-30-H	100 – 260 VAC, 50/60 Hz, 0.53 A, 50 W, 7500 lm, 150 lm/W, FP: ≥ 0.92 , 3000 K, IRC ≥ 70 , Life: 100 kh, IP66, IK08	Cross-sectional distribution: Type II; Longitudinal distribution: Short; Control of luminous intensity distribution: Limited



Ordinance no. 62/2022			
Clause	Requirement + Test	Result - Remark	Verdict
Annex I - Regulation Technician of Quality Towards Fixtures Towards The Lighting Public Road			
3	Technical requirement Towards Fixtures Used Discharge Lamps		N/A
3.1	Requirements from safety Electric		N/A
3.1.1	The body of the door lamps should be porcelain; the conductive parts must be nickel-plated brass with Threads E-27/27 or E-40/40, central contact, with spring effect and wetting device; the terminals and screws for fixing the conductors must be nickel-nickel-nickel brass, according to ABNT NBR IEC 60238:2005 (Edison Screw Lamp Holder).		N/A
3.1.2	The lamp holder or adjustable optical parts must contain the appropriate reference marks, according to ABNT NBR IEC 60238:2005 (Edison Screw Lamp Holder).		N/A
3.1.3	The luminaire must be provided with adequate anchorage, so that the conductors of the power cables are relieved of mechanical request at the points where they are connected to the terminals, when, without the anchorage, the weight of the power cables would exert a request on the connections.		N/A
3.1.3.1	The luminaire must already have the internal wiring necessary for its connection, identifying the cable corresponding to the central contact of the lamp		N/A
3.1.4	The photoelectric circuit socket (where applicable) must be electrically insulating material and its contacts must be tinned brass and suitable to support rated current of 10 A.		N/A
3.1.5	The luminaire enclosure shall ensure the degree of protection against the penetration of dust, solid objects and moisture, according to the classification of the luminaire and the IP code marked on the luminaire.		N/A
3.1.5.1	Luminaires must have the following minimum degrees of protection, according to ABNT NBR IEC 60598-1:2010 (Luminaires - Part 1: General requirements and tests):		N/A
	- IP-65 for optical compartment		N/A
	- IP-44 to reactor compartment		N/A
3.1.6	The insulation resistance and dielectric stiffness must be adequate, so that the luminaire is free of electrical insulation failures so that, at the operating temperature, the leakage current of the appliance is not excessive		N/A
3.1.7	Filters should be provided for the suppression of electromagnetic interference and radio frequency		N/A
3.1.7.1	Electromagnetic reactors for discharge lamps must meet the requirements according to the current Inmetro Ordinance.		N/A
3.1.8	The voltage increase of the reference sodium vapor lamp, when installed in the luminaire fed at		N/A



Ordinance no. 62/2022			
Clause	Requirement + Test	Result - Remark	Verdict
	the rated voltage, shall not exceed the maximum values specified in Table 1 below		
3.1.9	Luminaires must have resistance to the external mechanical impacts to which they are subjected in the conditions of use.		N/A
3.1.9.1	Luminaires must have at least the degree of protection IK08, according to ABNT NBR IEC 62262:2015 (Degrees of protection ensured by electrical equipment enclosures against external mechanical impacts (IK Code).		N/A
3.2	Requirements from performance		N/A
3.2.1	The luminaires must meet the minimum energy efficiency (EE) of 70 lm/W, as well as be classified in the Energy Efficiency classes of Table 2		N/A
3.2.1.1	The measured energy efficiency may not be lower than the acceptable minimum values defined in Table 2, nor less than 90% of the declared energy efficiency value		N/A
3.2.2	The luminaire should be classified according to the distributions of transverse and longitudinal illuminous intensity, according to the categories listed in Table 3		N/A
3.2.3	The luminaire should be classified as light distribution control (CDL) for each elevation angle declared as possible for installation (0°; 5°; 10°; 15°), in the categories specified in Table 4		N/A
3.2.4	The luminaire must have the following resistances to ultraviolet radiation		N/A
	(a) thermoplastic or polymeric components subject to time exposure shall not present premature degradation that compromises the operational performance of luminaires;		N/A
	(b) the transparency of polymer lenses and refractors shall not be less than 90% of the initial value; and		N/A
	(c) Refractors shall be designed against UV rays and with uniform thickness in order to avoid distortions in the photometric curve		N/A
3.2.5	The luminaire must not become unsafe or have premature failure under cyclic cooling and cooling conditions in service.		N/A
3.2.6	In conditions that represent abnormal operating conditions, parts of the luminaire and its mounting surface cannot reach excessive temperatures and wiring inside the luminaire cannot become unsafe.		N/A
4	Requirements Technical Towards Fixtures With Technology LED		P
4.1	Requirements from safety Electric		P
4.1.1	Luminaires must be designed to work under the following conditions of use:		P
	a) altitude not exceeding 1500 m		P
	(b) average ambient air temperature over a period of 24 h, not exceeding + 35 °C		P



Ordinance no. 62/2022			
Clause	Requirement + Test	Result - Remark	Verdict
	c) ambient air temperature between - 5 °C and + 50 °C; and		P
	d) Relative humidity up to 100%.		P
4.1.2	Luminaires must be individually packed in packages suitable for the type of transport (where applied) and the normal loading, unloading, handling and storage operations		P
4.1.3	The luminaire must be provided with adequate anchorage, so that the conductors of the power cables are relieved of mechanical request at the points where they are connected to the terminals.		P
4.1.4	The photoelectric circuit socket (where applicable) must have insulation resistance, dielectric stiffness, the ability to conduct currents of the appropriate contacts and mechanical fixation of the appropriate conductors, in order to avoid the risk of electric shock, overheating and undue unlocking of pins and cables:		N/A
4.1.5	The luminaire enclosure shall ensure the degree of protection against the penetration of dust, solid objects and moisture, according to the classification of the luminaire and the IP code marked on the luminaire		P
4.1.5.1	The housings of vital parts (LED, secondary optical system and controller) must have at least IP66 protection, according to ABNT NBR IEC 60598-1:2010 (Luminaires - Part 1: General requirements and tests).	IP66	P
4.1.5.2	If the controller is IP-65 or higher, the controller housing on the luminaire must be at least IP-44.		P
4.1.6	The insulation resistance and dielectric stiffness must be adequate, so that the luminaire is free of electrical insulation failures so that, at the operating temperature, the leakage current of the appliance is not excessive		P
	Right after the moisture test of item 9.3 of ABNT NBR IEC 60598-1, the luminaire shall be subject to the insulation resistance test as per ABNT NBR IEC 60598-1.		P
	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø		—
	Insulation resistance (M).....		—
	SELV		P
	- between current-carrying parts of different polarity	> 20 M	P
	- between current-carrying parts and mounting surface	> 20 M	P
	- between current-carrying parts and metal parts of the luminaire.....	> 20 M	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage		N/A



Ordinance no. 62/2022			
Clause	Requirement + Test	Result - Remark	Verdict
	and accessible metal parts.....:		
	- Insulation bushings		N/A
	Other than SELV		P
	- between live parts of different polarity	> 20 M	P
	- between live parts and mounting surface	> 20 M	P
	- between live parts and metal parts.....:	> 20 M	P
	- between live parts of different polarity through action of a switch		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts.....:		N/A
	- Insulation bushings		N/A
	Electric strength test		P
	Test voltage (V)		P
	SELV		P
	- between current-carrying parts of different polarity	500 V	P
	- between current-carrying parts and mounting surface	500 V	P
	- between current-carrying parts and metal parts of the luminaire.....:	500 V	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts.....:		N/A
	- Insulation bushings		N/A
	Other than SELV		P
	- between live parts of different polarity	1520 V	P
	- between live parts and mounting surface	1520 V	P
	- between live parts and metal parts.....:	1520 V	P
	- between live parts of different polarity through action of a switch		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts.....:		N/A
	- Insulation bushings.....:		N/A
4.1.7	Leakage current that may occur during normal use of the luminaire may not cause a risk of electric shock		P
	The luminaire shall be subjected to the leakage current test according to ABNT		P



Ordinance no. 62/2022			
Clause	Requirement + Test	Result - Remark	Verdict
	NBR IEC 60598-1.		
	Touch current or protective conductor current (mA):	1.2 mA	P
4.1.8	Luminaires must be constructed in such a way that their living parts are not accessible when the luminaire is electrically installed and connected for normal use.		P
ABNT NBR IEC 60598-1	The luminaire shall be subjected to the leakage current test according to ABNT NBR IEC 60598-1.		P
8.2.3 c)	For ordinary class III luminaires, the voltage under no-load exceeds 25 V r.m.s. or 60 V d.c., the touch current measured (mA):		N/A
	If the voltages or currents exceed the values given above, at least one of the conductive parts in the SELV circuit shall be insulated by insulation, withstanding:		N/A
8.2.5	Standard test finger and with force of 10 N test against electric shock		P
8.2.6	A force is applied to covers whose fixing is not dependent on screws:	☐ 20 N ☐ 80 N	N/A
8.2.7	Capacitor discharge test, Max. discharged voltage (V):	4 V	P
4.1.9	Filters should be provided on the controller (driver) for suppression of electromagnetic interference and radio frequency.		P
	Conformity is verified by submitting the controller to one of the following standards: EN 55015 or CISPR 15.		P
4.1.10	Luminaires must have a resistance to external mechanical impacts to which they are subject under the conditions of use		P
4.1.10.1	Luminaires must have at least the degree of protection IK08, according to ABNT NBR IEC 62262:2015 (Degrees of protection ensured by electrical equipment enclosures against external mechanical impacts (IK Code)).	IK08	P
4.1.11	The screws used in the luminaires and connections intended for the installation of the luminaires shall not show any deformation during tightening and untightening or causing deformation or breakage of the luminaire		P
ABNT NBR IEC 60598-1	The screws used to make the luminaires and the connections for installation of the luminaires shall be tested according to standard ABNT NBR IEC 60598-1 and shall not show any deformation during tightening or untightening or cause deformations and/or break the luminaires.		P
	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part..... :	0.5; enclosure	P



Ordinance no. 62/2022			
Clause	Requirement + Test	Result - Remark	Verdict
	Torque test: torque (Nm); part..... :		N/A
	Torque test: torque (Nm); part..... :		N/A
	Locked connections:		N/A
	- fixed arms; torque (Nm).....:		N/A
	- lampholder; torque (Nm).....:		N/A
	- push-button switches; torque 0,8 Nm.....:		N/A
	Screwed glands; force (Nm).....:		N/A
4.1.12	Must be resistant to the force of the wind to which they are subject when in normal use.		P
ABNT NBR 15129	The luminaires must withstand the wind forces, as per standard ABNT NBR 15129.		P
7.3	Static load test (10 min)		P
4.1.13	Luminaires must continue to function in vibration situations to which they are subject when in normal use, and may not present any electrical or mechanical failures such as cracks, breaks, warps, opening of the fasteners and others that may compromise their performance.		P
ABNT NBR IEC 60598-1	The luminaires must be resistant to vibration, according to ABNT NBR IEC 60598-1. The test must be made with the luminaire completely mounted with all the components.		P
	To be considered approved in the test, in addition to the evaluations provided in ABNT NBR IEC 60598-1, the luminaires must operate after the test the same way as before the test and shall present any electric or mechanic failures such as cracks, breaks, warp, locks opening, and others that may impair their performance.		P
4.2	Requirements from performance		P
4.2.1	The total power of the circuit, at the rated voltage, shall not exceed 110% of the declared value		P
4.2.2	The power factor of the luminaires must meet the following requirements		P
4.2.2.1	The measured power factor of the circuit cannot be lower than the value declared by more than 0.05, when the luminaire is fed with nominal voltage and frequency	See table 1 & 2	P
4.2.2.2	The power factor must be equal to or greater than 0.92.	See table 1 & 2	P
4.2.3	The voltage and output current conditions of the control device during operation must be as follows.		P
4.2.3.1	For control devices with unstabilized output voltage, when powered with the rated voltage, the output voltage may not differ more than $\pm 10\%$ from the rated voltage of the LED modules.		N/A
4.2.3.2	For control devices with a stabilized output voltage, when powered at any voltage between		N/A

Ordinance no. 62/2022																																								
Clause	Requirement + T est	Result - Remark	Verdict																																					
	92% and 106% of the rated voltage, the output voltage may not differ more than ±10% from the rated voltage of the LED modules																																							
4.2.3.3	For control devices with unstabilized output current, when powered with the rated voltage, the output current may not differ more than ±10% from the rated current of the LED modules.		N/A																																					
4.2.3.4	For control devices with stabilized output current, when fed at any voltage between 92% and 106% of the rated voltage, the output current may not present superfluous variation to ±10% of the rated current of the LED modules	See table 1	P																																					
4.2.3.5	The Luminaire with LED technology must have a voltage surge protection device		P																																					
4.2.4	The power current, in the rated voltage, may not differ by more than 10% from the declared value in the control device or in the supplier's literature		P																																					
4.2.4.1	The harmonics of the power supply current must comply with IEC 61000-3-2:2014 ((Electromagnetic compatibility (EMC) - Limits Is harmonic Current emissions (equipment input Current 16 The Per phase)).		P																																					
4.2.5	The luminaires must meet the minimum energy efficiency (EE) of 68 lm/W, as well as be classified in the Energy Efficiency classes of Table 5.		P																																					
4.2.5.1	The average measured energy efficiency may not be lower than the minimum acceptable values defined in Table 5, nor less than 90% of the declared energy efficiency value.		P																																					
4.2.6	The nominal color temperature (CBT) of a lamp should be between 2700 K and 6500 K, following the variations established in Table 6. <table><tr><th colspan="3">Color temperature (K)</th></tr><tr><th>Minimum Value</th><th>Declared Value</th><th>Maximum Value</th></tr><tr><td>2 580</td><td>2 700</td><td>2 870</td></tr><tr><td>2 870</td><td>3 000</td><td>3 220</td></tr><tr><td>3 220</td><td>3 500</td><td>3 710</td></tr><tr><td>3 710</td><td>4 000</td><td>4 260</td></tr><tr><td>4 260</td><td>4 500</td><td>4 746</td></tr><tr><td>4 746</td><td>5 000</td><td>5 312</td></tr><tr><td>5 312</td><td>5 700</td><td>6 022</td></tr><tr><td>6 022</td><td>6 500</td><td>7 042</td></tr><tr><td colspan="3">TCC Flexible (2800 – 5600K)</td></tr><tr><td colspan="3">1) TE shall be selected in steps of 100 K (2 800, 2 900, 3 000 K), excluding the nominal TCC values listed above.</td></tr><tr><td colspan="3">2) ΔT shall be calculated by $\Delta T = 1.1900 \times 10^{-5} \times T^2 - 1.5454 \times 10^{-4} \times T^2 + 0.7168 \times T - 902.55$</td></tr></table> See table 1 P	Color temperature (K)			Minimum Value	Declared Value	Maximum Value	2 580	2 700	2 870	2 870	3 000	3 220	3 220	3 500	3 710	3 710	4 000	4 260	4 260	4 500	4 746	4 746	5 000	5 312	5 312	5 700	6 022	6 022	6 500	7 042	TCC Flexible (2800 – 5600K)			1) TE shall be selected in steps of 100 K (2 800, 2 900, 3 000 K), excluding the nominal TCC values listed above.			2) ΔT shall be calculated by $\Delta T = 1.1900 \times 10^{-5} \times T^2 - 1.5454 \times 10^{-4} \times T^2 + 0.7168 \times T - 902.55$		
Color temperature (K)																																								
Minimum Value	Declared Value	Maximum Value																																						
2 580	2 700	2 870																																						
2 870	3 000	3 220																																						
3 220	3 500	3 710																																						
3 710	4 000	4 260																																						
4 260	4 500	4 746																																						
4 746	5 000	5 312																																						
5 312	5 700	6 022																																						
6 022	6 500	7 042																																						
TCC Flexible (2800 – 5600K)																																								
1) TE shall be selected in steps of 100 K (2 800, 2 900, 3 000 K), excluding the nominal TCC values listed above.																																								
2) ΔT shall be calculated by $\Delta T = 1.1900 \times 10^{-5} \times T^2 - 1.5454 \times 10^{-4} \times T^2 + 0.7168 \times T - 902.55$																																								
4.2.7	The luminaire must be able to properly reproduce the actual colors of an object or surface when compared to natural light.		P																																					
4.2.7.1	The General Color Reproduction Index (Ra), which characterizes the Color Reproduction Index (IRC), must be greater than or equal to 70 (Ra ≥ 70).		P																																					
4.2.8	The minimum life expectancy for maintaining the luminous flux of 70% (L70) is 50,000 hours.		P																																					
4.2.9	The built-in control device must have durability compatible with the rated life of the lamp.		P																																					
4.2.10	The luminaire should be classified according to the distributions of transverse and longitudinal iluminous intensity, according to the categories listed in Table 7, for an		P																																					

Ordinance no. 62/2022																						
Clause	Requirement + Test	Result - Remark	Verdict																			
	installation with an elevation angle of 0°).																					
	Classification of the luminous intensity distributions (3 samples)		P																			
	The luminaires are classifiable, based on ABNT NBR 5101, as to the cross-sectional distribution, longitudinal distribution and distribution control, as per Table 3.		P																			
	Cross-sectional distribution	Type II	P																			
	Longitudinal distribution	Short	P																			
	Control of luminous intensity distribution	Limited	P																			
4.2.11	The luminaire should be classified as for the control of light distribution (CDL), for an installation with an elevation angle of 0°, in the categories specified in Table 8.		P																			
	The luminous distribution control is defined by standard ABNT NBR 5101 and its values shown in below Table. (3 samples)		P																			
	Inform the CDL classification corresponding to the possible angles of elevation at installation, from the following: 0°, 5°, 10°, 15°, as well as meet the requirements according to their classification, as per the limits specified in below Table. (3 samples)		P																			
	<table><tr><th colspan="3">LUMINOUS DISTRIBUTION CONTROL - CDL</th></tr><tr><th>Type of luminaire</th><th colspan="2">CDL(%) = (Cd x 100) / luminaire flux</th></tr><tr><th></th><th colspan="2">ENCE</th></tr><tr><td rowspan="2">Totally limited</td><td>above 90°</td><td>0</td></tr><tr><td>above 80° & to 90°</td><td>≤ 10</td></tr><tr><td rowspan="2">Limited</td><td>above 90°</td><td>≤ 2.5</td></tr><tr><td>above 80° & to 90°</td><td>≤ 10</td></tr></table>	LUMINOUS DISTRIBUTION CONTROL - CDL			Type of luminaire	CDL(%) = (Cd x 100) / luminaire flux			ENCE		Totally limited	above 90°	0	above 80° & to 90°	≤ 10	Limited	above 90°	≤ 2.5	above 80° & to 90°	≤ 10	Limited	P
LUMINOUS DISTRIBUTION CONTROL - CDL																						
Type of luminaire	CDL(%) = (Cd x 100) / luminaire flux																					
	ENCE																					
Totally limited	above 90°	0																				
	above 80° & to 90°	≤ 10																				
Limited	above 90°	≤ 2.5																				
	above 80° & to 90°	≤ 10																				
4.2.12	The luminaire must have the following resistances to ultraviolet radiation:		P																			
	(a) lenses and polymer refractors subject to time exposure shall not have premature degradation that compromises the operational performance of luminaires;		P																			
	(b) the transparency of polymer lenses and refractors shall not be less than 90% of the initial value; and		P																			
	(c) Refractors shall be designed against UV rays and with uniform thickness in order to avoid distortions in the photometric curve		P																			
	The thermoplastic components subject to exposure to the weather must be submitted to weather tests based on standard ASTM G154, cycle 3, in UV chamber with exposure time of 2016 hours. After the test, the parts shall not show degradation that impairs the operational performance of the luminaires.		P																			
5	Requirements from markings and instructions		P																			
5.1	Markings must be indicated legibly and indelible on the luminaire, by means of adhesive, engraving or other method that guarantees readability and indelebility. Additionally, the luminaires must present the following information, in addition to those established in the ABNT NBR 15129:2012 standard (Lighting Fixtures - Particular Requirements):		P																			
	(a) number of luminaire manufacturing serials; and		P																			



Ordinance no. 62/2022			
Clause	Requirement + Test	Result - Remark	Verdict
	b) Luminaire model		P
5.2	The instruction leaflet must provide the following information, in addition to those set out in ABNT NBR 15129:2012 (Lighting Fixtures - Particular Requirements):		P
	a) name and or brand of the supplier		P
	b) supplier model or code;		P
	c) photometric classification, with indication of the corresponding elevation angle;		P
	d) rated power, in watts;		P
	e) rated voltage range, in volts;		P
	f) nominal frequency, in hertz;		P
	(g) the country of origin of the product;		P
	h) instructions to the user regarding electrical installation, handling and recommended care		P
	(i) information on the importer or distributor		P
	j) product warranty, from the date of the note of sale to the consumer, being at least 60 months;		P
	k) expiration date for storage: undetermined;		P
	l) type of protection against electric shock; and		P
	m) guidelines for obtaining the IES file of photometry.		P
5.3	For LED luminaires, the following additional marking requirements apply:		
	(a) The instruction leaflet shall also contain information on the controller (make, model, power, rated electric current) and life expectancy (h) corresponding to the maintenance of the luminous flux of 70 % (L70) or 80 % (L80).		P
	b) The controller must be marked according to ABNT NBR IEC 61347-2-13:2012 (Lamp Control Device - Part 2-13: Particular electronic control requirements fed in c.c. or c.a. for LED modules) and ABNT NBR 16026:2012 (Electronic control device c.c. or c.a. for LED modules - Performance requirements).		P
	(c) Packaging shall be identified externally with the following minimum information, marked legibly and indelibly, by means of adhesive, engraving or other method ensuring readability and indelebility:		P
	- name and/or brand of the manufacturer;		P
	- model or type of luminaire;		P
	- CNPJ and supplier address;		P
	- Gross weight; and		P
	- Stacking capacity and position.		P



Ordinance no. 62/2022																				
Clause	Requirement + Test		Result - Remark	Verdict																
Annex B	Method From Measurement And Calculation Of Maintenance From Flow Bright Of LEDs (Based On In Norm Iesna Lm-80-08 And Tm-21)			P																
	Performance Characteristics			P																
	Maintenance of the luminous flux of the luminaire			P																
	The useful life span estimated for the LED products is normally given in terms of the expectancy in hours of operation until the luminous flux of the luminaire falls to 70 % of its initial value (shown as L70). There are two (2) options to show with luminous flux maintenance of the luminaire.	☒ option 1: Component Performance ☐ option 2: Luminaire Performance		P																
	Option 1: LED Component Performance			P																
	ISTMT measurement			P																
	To evaluate the conformity by the LED component performance, the following conditions shall be met:			P																
	a) The highest temperature measured on the ISTMT shall stay below the highest value of temperature of the component measured on LM-80.	Temperature measured on the ISTMT (C): Max. 90.1 C Temperature measured on measured on LM-80 (C): 105 C		P																
	b) The location of the temperature measuring point (TMP) is defined by the manufacturer, both for the tests relative to the LM-80 for the ISTMT.			P																
	c) The LED current supplied by the LED controller on the luminaire, shall be lower than or equal to the LED current measured for the LM-80 report.	LED current supplied by the LED controller on the luminaire (mA): Max. 110 mA LED current measured for the LM-80 report (mA): 150 mA		P																
	d) The luminous flux maintenance in time (t), estimated as per TM-21, shall be higher than or equal to the flux maintenance percent corresponding to the final projected point, listed in Table 1 in Attachment D.			P																
	<table><tr><th>Final projected point</th><th>Flux maintenance required for products of 50 000 h</th></tr><tr><td>36 000 h</td><td>≥ 77.35 %</td></tr><tr><td>38 500 h</td><td>≥ 75.98 %</td></tr><tr><td>42 000 h</td><td>≥ 74.11 %</td></tr><tr><td>44 000 h</td><td>≥ 73.06 %</td></tr><tr><td>48 000 h</td><td>≥ 71.01 %</td></tr><tr><td>49 500 h</td><td>≥ 70.25 %</td></tr><tr><td>50 000 h</td><td>≥ 70.00 %</td></tr></table>	Final projected point	Flux maintenance required for products of 50 000 h	36 000 h	≥ 77.35 %	38 500 h	≥ 75.98 %	42 000 h	≥ 74.11 %	44 000 h	≥ 73.06 %	48 000 h	≥ 71.01 %	49 500 h	≥ 70.25 %	50 000 h	≥ 70.00 %		Time (t) at which to estimate lumen maintenance (hours): >120000 h; The luminous flux maintenance: 91.47%	P
Final projected point	Flux maintenance required for products of 50 000 h																			
36 000 h	≥ 77.35 %																			
38 500 h	≥ 75.98 %																			
42 000 h	≥ 74.11 %																			
44 000 h	≥ 73.06 %																			
48 000 h	≥ 71.01 %																			
49 500 h	≥ 70.25 %																			
50 000 h	≥ 70.00 %																			
	Option 2: Luminaire Performance			N/A																
	The luminaire performance conformity for the luminous flux maintenance is verified by submitting the complete luminaire to the photometric tests of LM-79, by comparing the initial luminous flux (time = 0 h) with the luminous flux after 6 000 h of operation (time ≥ 6000 h).			N/A																
	The test report shall demonstrate a minimum percent of the luminous flux maintenance, as below Table.			N/A																
	Nominal life declared	Maintenance of the minimum luminous flux at 6	Initial luminous flux (lm): luminous flux at at 6000 h (lm):	N/A																



Ordinance no. 62/2022					
Clause	Requirement + Test			Result - Remark	Verdict
		000 h		Maintenance at 6000 h:	
	50000 h	95,8 %			
	Qualification of the electronic control device CC or CA for LED modules				P
	The electronic control device for the LED, independent or embedded type, shall be tested at the situation of application in nominal operation conditions (nominal voltage and ambient temperature), by measuring the controller housing temperature at the indicated point (tc). For the test, the luminaire shall operate at an ambient temperature of 35 °C.			Rated tc (C): 90 C; Measured tc (C): 72.8 C	P



Table 1 – Energy efficiency test for full test model

Model No.:	YR24045-60-L	Rated wattage (W):	240			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☒ 127 ☐ 220 ☐ 277		LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current						
Test Items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	236.7	1882	30112	127.22	N/A	0.9954	6226	73.7	Input voltage: at 116.84 V; Output current: 1.8159 A; Input voltage: at 134.62 V; Output current:1.8266 A
2#:	237.6	1885	30042	126.44	N/A	0.9948	6229	73.3	Input voltage: at 116.84 V; Output current: 1.8186 A; Input voltage: at 134.62 V; Output current:1.8242 A
3#:	237.1	1880	30207	127.4	N/A	0.9962	6236	73.9	Input voltage: at 116.84 V; Output current:1.8134 A; Input voltage: at 134.62 V; Output current: 1.8279 A
Arithmetic mean	237.1	1882	30120	127.02	N/A	0.9955	6230	73.6	—
Rating	240	2400	31200	130	N/A	0.92	6500	70	Program set max. output current 1.8 A
Limit	264	< 2640	28080	90	N/A	0.92	6022 to 7042	70	1.62 to 1.98 A
Verdict	P	P	P	P	N/A	P	P	P	P



Table 1 – Energy efficiency test for full test model

Model No.:	YR24045-60-L	Rated wattage (W):	240	Frequency (Hz):	60	Stabilization time (h):	1		
Test voltage for Supply current (V):	☐ 127 ☒ 220 ☐ 277			LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current					
Test Items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	237.1	1100	30749	129.69	N/A	0.9739	6237	74.0	Input voltage: at 202.4 V; Output current: 1.8369 A; Input voltage: at 233.2 V; Output current: 1.8596 A
2#:	237.3	1107	30746	129.57	N/A	0.9746	6228	73.5	Input voltage: at 202.4 V; Output current: 1.8347 A; Input voltage: at 233.2 V; Output current: 1.8579 A
3#:	237.2	1102	30765	129.7	N/A	0.9753	6233	73.9	Input voltage: at 202.4 V; Output current: 1.8317 A; Input voltage: at 233.2 V; Output current: 1.8609 A
Arithmetic mean	237.2	1103	30753	129.65	N/A	0.9746	6233	73.8	—
Rating	240	2400	31200	130	N/A	0.92	6500	70	Program set max. output current 1.8 A
Limit	264	< 2640	28080	90	N/A	0.92	6022 to 7042	70	1.62 to 1.98 A
Verdict	P	P	P	P	N/A	P	P	P	P



Ordinance no. 62/2022

Continued Table 1

Harmonic current							
Harmonic Order (n)	Maximum harmonic measured (%)						Maximum harmonic currents limit (%)
Sample No.	1.	2.	3.	1.	2.	3.	—
voltage	127 V			220 V			
30 :	29.89	29.86	29.93	29.28	29.25	29.32	—
2	0.069	0.068	0.068	0.121	0.126	0.123	2
3	1.701	1.706	1.709	2.162	2.166	2.167	30
5	1.264	1.266	1.268	2.501	2.506	2.507	10
7	1.889	1.886	1.889	3.140	3.146	3.150	7
9	1.454	1.456	1.461	2.447	2.446	2.447	5
11 < n < 39 (Only odd harmonics)	0.869	0.866	0.869	1.645	1.665	1.650	3



Table 1 – Energy efficiency test for full test model

Model No.:	YR24045-60-H	Rated wattage (W):	240			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☒ 127 ☐ 220 ☐ 277			LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current					
Test Items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	246.4	1946	38055	154.44	N/A	0.9941	6715	75.0	Input voltage: at 116.84 V; Output current: 0.9192 A; Input voltage: at 134.62 V; Output current:0.9206 A
2#:	246.7	1943	38007	154.06	N/A	0.9941	6726	74.2	Input voltage: at 116.84 V; Output current: 0.9191 A; Input voltage: at 134.62 V; Output current:0.9236 A
3#:	246.1	1944	37974	154.3	N/A	0.9933	6715	73.8	Input voltage: at 116.84 V; Output current:0.9275 A; Input voltage: at 134.62 V; Output current: 0.9283 A
Arithmetic mean	246.4	1944	38012	154.27	N/A	0.9938	6719	74.3	—
Rating	240	2650	36000	150	N/A	0.92	6500	70	Program set max. output current 0.92 A
Limit	264	< 2915	32400	90	N/A	0.92	6022 to 7042	70	0.828 to 1.012 A
Verdict	P	P	P	P	N/A	P	P	P	P



Table 1 – Energy efficiency test for full test model

Model No.:	YR24045-60-H	Rated wattage (W):	240			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☐ 127 ☒ 220 ☐ 277		LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current						
Test Items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	234.6	1114	37444	159.61	N/A	0.9608	6753	75.1	Input voltage: at 202.4 V; Output current:0.9195 A; Input voltage: at 233.2 V; Output current: 0.9243 A
2#:	234.4	1114	37413	159.61	N/A	0.9608	6744	74.6	Input voltage: at 202.4 V; Output current: 0.9197 A; Input voltage: at 233.2 V; Output current: 0.9215A
3#:	234.9	1104	37456	159.46	N/A	0.9606	6746	74.2	Input voltage: at 202.4 V; Output current: 0.9223 A; Input voltage: at 233.2 V; Output current: 0.9257 A
Arithmetic mean	234.8	1111	37443	159.49	N/A	0.9611	6747	74.3	—
Rating	240	2650	36000	150	N/A	0.92	6500	70	Program set max. output current 0.92 A
Limit	264	< 2915	32400	90	N/A	0.92	6022 to 7042	70	0.828 to 1.012 A
Verdict	P	P	P	P	N/A	P	P	P	P



Ordinance no. 62/2022

Continued Table 1

Harmonic current							
Harmonic Order (n)	Maximum harmonic measured (%)						Maximum harmonic currents limit (%)
Sample No.	4.	5.	6.	4.	5.	6.	—
voltage	127 V			220 V			
30 :	29.82	29.79	29.81	28.89	28.91	28.84	—
2	0.052	0.056	0.053	0.134	0.136	0.134	2
3	3.811	3.821	3.806	6.574	6.575	6.578	30
5	2.150	2.156	2.151	2.891	2.896	2.893	10
7	1.572	1.572	1.570	2.295	2.296	2.295	7
9	1.211	1.212	1.211	1.965	1.966	1.968	5
11 < n < 39 (Only odd harmonics)	0.966	0.967	0.971	1.635	1.636	1.639	3



Table 1 – Energy efficiency test for full test model

Model No.:	YR20045-40-L	Rated wattage (W):	200			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☒ 127 ☐ 220 ☐ 277			LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current					
Test items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	198.7	1564	25269	127.17	N/A	0.9943	4134	84.8	Input voltage: at 116.84 V; Output current: 1.5304 A; Input voltage: at 134.62 V; Output current:1.5365 A
2#:	198.7	1558	25367	127.66	N/A	0.9932	4121	84.9	Input voltage: at 116.84 V; Output current: 1.5320 A; Input voltage: at 134.62 V; Output current:1.5378 A
3#:	197.3	1562	25268	128.07	N/A	0.9937	4124	85.2	Input voltage: at 116.84 V; Output current:1.5296 A; Input voltage: at 134.62 V; Output current: 1.5351 A
Arithmetic mean	198.2	1561	25301	127.63	N/A	0.9937	4126	85	—
Rating	200	2000	26000	130	N/A	0.92	4000	70	Program set max. output current 1.5 A
Limit	220	< 2200	23400	90	N/A	0.92	3710 to 4260	70	1.35 to 1.65 A
Verdict	P	P	P	P	N/A	P	P	P	P



Table 1 – Energy efficiency test for full test model

Model No.:	YR20045-40-L	Rated wattage (W):	200			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☐ 127 ☒ 220 ☐ 277		LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current						
Test Items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	198.2	941	25597	129.15	N/A	0.9636	4131	84.3	Input voltage: at 202.4 V; Output current:1.5484 A; Input voltage: at 233.2 V; Output current: 1.5548 A
2#:	198.5	937	25648	129.21	N/A	0.962	4123	85.4	Input voltage: at 202.4 V; Output current: 1.5473 A; Input voltage: at 233.2 V; Output current: 1.5539 A
3#:	197.8	933	25544	129.14	N/A	0.9641	4130	84.1	Input voltage: at 202.4 V; Output current: 1.5489 A; Input voltage: at 233.2 V; Output current: 1.5586 A
Arithmetic mean	198.2	937	25596	129.17	N/A	0.9632	4128	84.6	—
Rating	200	2000	26000	130	N/A	0.92	4000	70	Program set max. output current 1.5 A
Limit	220	< 2200	23400	90	N/A	0.92	3710 to 4260	70	1.35 to 1.65 A
Verdict	P	P	P	P	N/A	P	P	P	P



Continued Table 1

Harmonic current							
Harmonic Order (n)	Maximum harmonic measured (%)						Maximum harmonic currents limit (%)
Sample No.	7.	8.	9.	7.	8.	9.	—
voltage	127 V			220 V			
30 :	29.88	29.85	29.81	29.01	28.95	29.06	—
2	0.16	0.14	0.12	0.20	0.19	0.26	2
3	0.35	0.39	0.31	4.29	4.37	4.43	30
5	3.16	3.09	3.11	4.80	4.63	4.76	10
7	2.40	2.27	2.39	3.32	3.37	3.21	7
9	0.74	0.83	0.71	1.75	1.72	1.63	5
11 < n < 39 (Only odd harmonics)	0.76	0.71	0.74	1.87	1.81	1.72	3



Table 1 – Energy efficiency test for full test model

Model No.:	YR15045-50-L	Rated wattage (W):	150			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☒ 127 ☐ 220 ☐ 277		LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current						
Test Items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	141.7	1118	19080	134.65	N/A	0.9921	5087	83.0	Input voltage: at 116.84 V; Output current: 1.1059 A; Input voltage: at 134.62 V; Output current: 1.1149 A
2#:	141.1	1125	19124	135.54	N/A	0.9928	5097	84.0	Input voltage: at 116.84 V; Output current: 1.1041 A; Input voltage: at 134.62 V; Output current: 1.1134 A
3#:	142.4	1121	19114	134.23	N/A	0.9917	5082	83.6	Input voltage: at 116.84 V; Output current: 1.1062 A; Input voltage: at 134.62 V; Output current: 1.1159 A
Arithmetic mean	141.7	1121	19106	134.81	N/A	0.9922	5089	83.5	—
Rating	150	1500	19500	130	N/A	0.92	5000	70	Program set max. output current 1.1 A
Limit	165	< 1650	17550	90	N/A	0.92	4746 to 5312	70	0.99 to 1.21 A
Verdict	P	P	P	P	N/A	P	P	P	P



Table 1 – Energy efficiency test for full test model

Model No.:	YR15045-50-L	Rated wattage (W):	150			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☐ 127 ☒ 220 ☐ 277			LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current					
Test Items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	146.8	664	19727	134.38	N/A	0.9566	5101	83.0	Input voltage: at 202.4 V; Output current: 1.1541 A; Input voltage: at 233.2 V; Output current: 1.1729 A
2#:	146.9	664	19688	134.02	N/A	0.9553	5108	83.7	Input voltage: at 202.4 V; Output current: 1.1549 A; Input voltage: at 233.2 V; Output current: 1.1732 A
3#:	146.5	653	19616	133.9	N/A	0.9573	5100	83.6	Input voltage: at 202.4 V; Output current: 1.1534 A; Input voltage: at 233.2 V; Output current: 1.1747 A
Arithmetic mean	146.7	660	19677	134.1	N/A	0.9564	5103	83.4	—
Rating	150	1500	19500	130	N/A	0.92	5000	70	Program set max. output current 1.1 A
Limit	165	< 1650	17550	90	N/A	0.92	4746 to 5312	70	0.99 to 1.21 A
Verdict	P	P	P	P	N/A	P	P	P	P



Ordinance no. 62/2022

Continued Table 1

Harmonic current							
Harmonic Order (n)	Maximum harmonic measured (%)						Maximum harmonic currents limit (%)
Sample No.	10.	11.	12.	10.	11.	12.	—
voltage	127 V			220 V			
30 :	29.83	29.89	29.87	28.86	28.92	28.81	—
2	0.10	0.16	0.20	0.17	0.23	0.19	2
3	2.71	2.62	2.79	4.09	4.25	4.16	30
5	1.72	1.66	1.83	3.17	3.23	3.11	10
7	2.29	2.23	2.25	3.72	3.87	3.85	7
9	1.60	1.51	1.62	2.92	3.03	2.87	5
11 < n < 39 (Only odd harmonics)	1.44	1.49	1.59	2.08	2.01	2.06	3



Table 1 – Energy efficiency test for full test model

Model No.:	YR05045-60-L	Rated wattage (W):	50			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☒ 127 ☐ 220 ☐ 277		LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current						
Test Items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	49.7	402	7293	146.74	N/A	0.9803	6031	71.8	Input voltage: at 116.84 V; Output current: 0.3781 A; Input voltage: at 134.62 V; Output current: 0.3790 A
2#:	49.7	402	7286	146.6	N/A	0.9811	6039	71.6	Input voltage: at 116.84 V; Output current: 0.3796 A; Input voltage: at 134.62 V; Output current: 0.3799 A
3#:	50.8	408	7285	143.41	N/A	0.9798	6036	71.4	Input voltage: at 116.84 V; Output current: 0.3789 A; Input voltage: at 134.62 V; Output current: 0.3793 A
Arithmetic mean	50.1	404	7288	145.58	N/A	0.9804	6035	71.6	—
Rating	50	460	6500	130	N/A	0.92	6500	70	Program set max. output current 0.38 A
Limit	55	< 506	5850	90	N/A	0.92	6022 to 7042	70	0.342 to 0.418
Verdict	P	P	P	P	N/A	P	P	P	P



Table 1 – Energy efficiency test for full test model

Model No.:	YR05045-60-L	Rated wattage (W):	50			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☐ 127 ☒ 220 ☐ 277		LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current						
Test Items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	49.2	246	7369	149.78	N/A	0.9204	6031	72.0	Input voltage: at 202.4 V; Output current: 0.3818 A; Input voltage: at 233.2 V; Output current: 0.3826 A
2#:	48.8	255	7311	149.82	N/A	0.9197	6032	71.9	Input voltage: at 202.4 V; Output current: 0.3806 A; Input voltage: at 233.2 V; Output current: 0.3812 A
3#:	50.8	236	7377	145.22	N/A	0.922	6038	72.0	Input voltage: at 202.4 V; Output current: 0.3815 A; Input voltage: at 233.2 V; Output current: 0.3829 A
Arithmetic mean	49.6	246	7352	148.27	N/A	0.9207	6034	72.0	—
Rating	50	460	6500	130	N/A	0.92	6500	70	Program set max. output current 0.38 A
Limit	55	< 506	5850	90	N/A	0.92	6022 to 7042	70	0.342 to 0.418
Verdict	P	P	P	P	N/A	P	P	P	P



Ordinance no. 62/2022

Continued Table 1

Harmonic current							
Harmonic Order (n)	Maximum harmonic measured (%)						Maximum harmonic currents limit (%)
Sample No.	13.	14.	15.	13.	14.	15.	—
voltage	127 V			220 V			
30 :	29.74	29.79	29.71	28.16	28.29	28.21	—
2	0.14	0.19	0.26	0.16	0.19	0.24	2
3	2.30	2.39	3.06	8.23	8.69	8.97	30
5	3.82	3.93	4.11	5.73	5.98	6.23	10
7	2.52	2.84	2.51	2.87	3.61	2.93	7
9	0.51	0.92	1.06	1.38	1.56	1.74	5
11 < n < 39 (Only odd harmonics)	1.23	1.51	1.48	2.39	2.55	2.43	3



Table 1 – Energy efficiency test for full test model

Model No.:	YR15045-40-H	Rated wattage (W):	150			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☒ 127 ☐ 220 ☐ 277			LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current					
Test Items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	146.8	1162	22341	152.19	N/A	0.9897	4096	83.8	Input voltage: at 116.84 V; Output current: 0.6162 A; Input voltage: at 134.62 V; Output current: 0.6163 A
2#:	147.3	1162	22268	151.17	N/A	0.9889	4097	82.6	Input voltage: at 116.84 V; Output current: 0.6159 A; Input voltage: at 134.62 V; Output current: 0.6155 A
3#:	145.9	1160	22263	152.59	N/A	0.9892	4092	83.8	Input voltage: at 116.84 V; Output current: 0.6169 A; Input voltage: at 134.62 V; Output current: 0.6175 A
Arithmetic mean	146.7	1161	22291	151.98	N/A	0.9893	4095	83.4	—
Rating	150	1800	22500	150	N/A	0.92	4000	70	Program set max. output current 0.61 A
Limit	165	< 1980	20250	90	N/A	0.92	3710 to 4260	70	0.549 to 0.671
Verdict	P	P	P	P	N/A	P	P	P	P



Table 1 – Energy efficiency test for full test model

Model No.:	YR15045-40-H		Rated wattage (W):	150			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☐ 127 ☒ 220 ☐ 277			LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current						
Test items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device	
1#:	144.2	682	22292	154.59	N/A	0.9344	4106	84	Input voltage: at 202.4 V; Output current: 0.6161 A; Input voltage: at 233.2 V; Output current: 0.6161 A	
2#:	142.3	679	22261	156.44	N/A	0.9346	4108	83.6	Input voltage: at 202.4 V; Output current: 0.6155 A; Input voltage: at 233.2 V; Output current: 0.6157 A	
3#:	143.5	684	22192	154.65	N/A	0.9345	4098	83.2	Input voltage: at 202.4 V; Output current: 0.6151 A; Input voltage: at 233.2 V; Output current: 0.6153 A	
Arithmetic mean	143.3	682	22248	155.23	N/A	0.9345	4104	83.6	—	
Rating	150	1800	22500	150	N/A	0.92	4000	70	Program set max. output current 0.61 A	
Limit	165	< 1980	20250	90	N/A	0.92	3710 to 4260	70	0.549 to 0.671	
Verdict	P	P	P	P	N/A	P	P	P	P	



Ordinance no. 62/2022

Continued Table 1

Harmonic current							
Harmonic Order (n)	Maximum harmonic measured (%)						Maximum harmonic currents limit (%)
Sample No.	16.	17.	18.	16.	17.	18.	—
voltage	127 V			220 V			
30 :	29.74	29.79	29.71	28.20	28.25	28.19	—
2	0.14	0.16	0.11	0.18	0.25	0.22	2
3	5.69	5.76	5.78	11.66	11.26	11.39	30
5	3.37	3.42	3.36	6.21	5.98	6.15	10
7	2.42	2.54	2.55	4.48	4.53	4.36	7
9	1.80	1.82	1.74	2.71	2.98	2.79	5
11 < n < 39 (Only odd harmonics)	1.29	1.22	1.25	1.79	1.56	1.63	3



Table 1 – Energy efficiency test for full test model

Model No.:	YR20045-50-H			Rated wattage (W):	200		Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☒ 127 ☐ 220 ☐ 277			LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current						
Test items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device	
1#:	204.9	1627	28306	138.15	N/A	0.9926	5192	83.7	Input voltage: at 116.84 V; Output current: 0.8082 A; Input voltage: at 134.62 V; Output current: 0.8053 A	
2#:	205.2	1627	28360	138.21	N/A	0.9927	5191	83.5	Input voltage: at 116.84 V; Output current: 0.8079 A; Input voltage: at 134.62 V; Output current: 0.8063 A	
3#:	206.1	1628	28235	137	N/A	0.9934	5182	83.2	Input voltage: at 116.84 V; Output current: 0.8062 A; Input voltage: at 134.62 V; Output current: 0.8044 A	
Arithmetic mean	205.4	1627	28300	137.79	N/A	0.9929	5188	83.5	—	
Rating	200	2300	30000	150	N/A	0.92	5000	70	Program set max. output current 0.8 A	
Limit	220	< 2530	27000	90	N/A	0.92	4746 to 5312	70	0.72 to 0.88 A	
Verdict	P	P	P	P	N/A	P	P	P	P	



Table 1 – Energy efficiency test for full test model

Model No.:	YR20045-50-H	Rated wattage (W):	200			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☐ 127 ☒ 220 ☐ 277		LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current						
Test Items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	201.5	961	28263	140.26	N/A	0.9509	5184	82.8	Input voltage: at 202.4 V; Output current: 0.8097 A; Input voltage: at 233.2 V; Output current: 0.8093 A
2#:	200.3	960	28241	140.99	N/A	0.951	5200	82.4	Input voltage: at 202.4 V; Output current: 0.8085 A; Input voltage: at 233.2 V; Output current: 0.8078 A
3#:	199.8	956	28327	141.78	N/A	0.9512	5182	83.5	Input voltage: at 202.4 V; Output current: 0.8096 A; Input voltage: at 233.2 V; Output current: 0.8089 A
Arithmetic mean	200.5	959	28277	141.01	N/A	0.951	5189	82.9	—
Rating	200	2300	30000	150	N/A	0.92	5000	70	Program set max. output current 0.8 A
Limit	220	< 2530	27000	90	N/A	0.92	4746 to 5312	70	0.72 to 0.88 A
Verdict	P	P	P	P	N/A	P	P	P	P



Ordinance no. 62/2022

Continued Table 1

Harmonic current							
Harmonic Order (n)	Maximum harmonic measured (%)						Maximum harmonic currents limit (%)
Sample No.	19.	20.	21.	19.	20.	21.	—
voltage	127 V			220 V			
30 :	29.83	29.89	29.87	28.58	28.51	28.55	—
2	0.11	0.16	0.19	0.15	0.19	0.17	2
3	4.05	4.12	4.23	7.41	7.49	7.45	30
5	2.43	2.59	2.67	3.73	3.91	3.79	10
7	1.83	1.93	1.96	3.08	3.15	3.11	7
9	1.38	1.24	1.28	2.31	2.36	2.32	5
11 < n < 39 (Only odd harmonics)	1.22	1.12	1.19	1.85	1.93	1.81	3



Table 1 – Energy efficiency test for full test model

Model No.:	YR10045-30-H	Rated wattage (W):	100			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☒ 127 ☐ 220 ☐ 277		LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current						
Test Items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device
1#:	97.9	783	14028	143.29	N/A	0.9897	2904	80.9	Input voltage: at 116.84 V; Output current: 0.7847 A; Input voltage: at 134.62 V; Output current: 0.7886 A
2#:	97.6	792	14128	144.75	N/A	0.9892	2920	81.5	Input voltage: at 116.84 V; Output current: 0.7859 A; Input voltage: at 134.62 V; Output current: 0.7875 A
3#:	97.9	777	13986	142.86	N/A	0.9912	2903	80.5	Input voltage: at 116.84 V; Output current: 0.7859 A; Input voltage: at 134.62 V; Output current: 0.7873 A
Arithmetic mean	97.8	784	14047	143.63	N/A	0.99	2909	81.0	—
Rating	100	1300	15000	150	N/A	0.92	3000	70	Program set max. output current 0.78 A
Limit	110	< 1430	13500	90	N/A	0.92	2870 to 3220	70	0.702 to 0.858
Verdict	P	P	P	P	N/A	P	P	P	P



Ordinance no. 62/2022

Table 1 – Energy efficiency test for full test model

Model No.:	YR10045-30-H		Rated wattage (W):	100			Frequency (Hz):	60	Stabilization time (h):	1
Test voltage for Supply current (V):	☐ 127 ☒ 220 ☐ 277			LED Control device: ☐ Control devices with non-stabilized output voltage ☐ Control devices with a stabilized output voltage ☐ Control devices with non-stabilized output current, ☒ Control devices having a stabilized output current						
Test items Sample No.	Lamp power (W)	Supply current (mA)	Initial luminous flux (lm)	Energy efficiency (lm/W)	luminous flux at 6000 h (lm)	Power factor ()	TCC (K)	Ra	Voltage and output current from the control device	
1#:	96.9	465	14174	146.27	N/A	0.9546	2916	81	Input voltage: at 202.4 V; Output current: 0.7946 A; Input voltage: at 233.2 V; Output current: 0.8003 A	
2#:	96.9	464	14189	146.43	N/A	0.9556	2908	80.7	Input voltage: at 202.4 V; Output current: 0.7953 A; Input voltage: at 233.2 V; Output current: 0.8012 A	
3#:	99.2	459	14139	142.53	N/A	0.9548	2908	80.4	Input voltage: at 202.4 V; Output current: 0.7963 A; Input voltage: at 233.2 V; Output current: 0.8025 A	
Arithmetic mean	97.7	463	14167	145.08	N/A	0.955	2911	80.7	—	
Rating	100	1300	15000	150	N/A	0.92	3000	70	Program set max. output current 0.78 A	
Limit	110	< 1430	13500	90	N/A	0.92	2870 to 3220	70	0.702 to 0.858	
Verdict	P	P	P	P	N/A	P	P	P	P	



Ordinance no. 62/2022

Continued Table 1

Harmonic current							
Harmonic Order (n)	Maximum harmonic measured (%)						Maximum harmonic currents limit (%)
Sample No.	22.	23.	24.	22.	23.	24.	—
voltage	127 V			220 V			
30 :	29.86	29.82	29.85	28.92	28.95	28.99	—
2	0.12	0.16	0.20	0.16	0.19	0.25	2
3	0.62	0.74	0.82	5.19	5.63	5.89	30
5	3.45	3.87	3.59	4.83	4.96	5.26	10
7	2.02	2.16	2.19	1.50	1.79	1.93	7
9	0.24	0.36	0.42	1.07	1.22	1.49	5
11 < n < 39 (Only odd harmonics)	1.09	1.11	1.26	1.66	1.89	1.98	3



Table 2 – Energy efficiency test for partly test model

Model No.:	YR24045-30-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	240	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	250.1	28110	112.4	0.9965	
2#:	248.7	28079	112.9	0.9952	
3#:	249.2	28202	113.17	0.9971	
Arithmetic mean	249.3	28130	112.82	0.9963	
Rating	240	31200	130	0.92	
Limit	264	28080	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR24045-30-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	240	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	245.2	28108	114.63	0.9763	
2#:	245.9	28098	114.27	0.9753	
3#:	245.1	28201	115.06	0.9769	
Arithmetic mean	245.4	28136	114.65	0.9762	
Rating	240	31200	130	0.92	
Limit	264	28080	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR20045-30-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	200	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	202.4	24132	119.23	0.9944	
2#:	203.9	24095	118.17	0.9947	
3#:	203.1	24222	119.26	0.9948	
Arithmetic mean	203.1	24150	118.89	0.9946	
Rating	200	26000	130	0.92	
Limit	220	23400	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR20045-30-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	200	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	202.1	24310	120.29	0.9656	
2#:	200.7	24240	120.78	0.9647	
3#:	201.0	24237	120.58	0.9656	
Arithmetic mean	201.3	24262	120.55	0.9653	
Rating	200	26000	130	0.92	
Limit	220	23400	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR15045-30-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	150	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	144.3	17584	121.86	0.9932	
2#:	144.6	17499	121.02	0.993	
3#:	145.7	17618	120.92	0.993	
Arithmetic mean	144.9	17567	121.27	0.9931	
Rating	150	19500	130	0.92	
Limit	165	17550	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR15045-30-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	150	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	149.4	18133	121.37	0.9598	
2#:	150.2	18093	120.46	0.9590	
3#:	149.6	18204	121.68	0.9593	
Arithmetic mean	149.7	18143	121.17	0.9594	
Rating	150	19500	130	0.92	
Limit	165	17550	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-30-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	97.4	12130	124.54	0.9878	
2#:	97.7	12212	124.99	0.9879	
3#:	96.9	12043	124.28	0.9883	
Arithmetic mean	97.3	12128	124.6	0.988	
Rating	100	13000	130	0.92	
Limit	110	11700	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-30-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	99.7	12267	123.04	0.9378	
2#:	98.2	12230	124.54	0.939	
3#:	99.7	12340	123.77	0.9378	
Arithmetic mean	99.2	12279	123.78	0.9382	
Rating	100	13000	130	0.92	
Limit	110	11700	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-30-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	46,5	5974	128,47	0,9783	
2#:	46,2	5969	129,2	0,9787	
3#:	48,0	6001	125,02	0,9786	
Arithmetic mean	46,9	5981	127,56	0,9785	
Rating	50	6500	130	0,92	
Limit	55	5850	90	0,92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-30-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	47.5	5994	126.19	0.925	
2#:	46.9	5933	126.5	0.9255	
3#:	47.7	6019	126.18	0.9246	
Arithmetic mean	47.4	5982	126.29	0.925	
Rating	50	6500	130	0.92	
Limit	55	5850	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR24045-40-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	240	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	233.0	28075	120.49	0.9962	
2#:	233.9	28071	120.01	0.9957	
3#:	233.4	28088	120.34	0.9955	
Arithmetic mean	233.4	28078	120.28	0.9958	
Rating	240	31200	130	0.92	
Limit	264	28080	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR24045-40-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	240	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	231.6	28249	121.97	0.9723	
2#:	232.3	28227	121.51	0.9732	
3#:	233.0	28313	121.52	0.9716	
Arithmetic mean	232.3	28263	121.67	0.9724	
Rating	240	31200	130	0.92	
Limit	264	28080	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR15045-40-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	150	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	144.9	18998	131.11	0.9928	
2#:	145.7	19028	130.6	0.9925	
3#:	146.1	19009	130.11	0.9933	
Arithmetic mean	145.6	19012	130.61	0.9929	
Rating	150	19500	130	0.92	
Limit	165	17550	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR15045-40-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	150	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	148.4	19561	131.81	0.9595	
2#:	150.4	19573	130.14	0.9587	
3#:	149.8	19542	130.45	0.9598	
Arithmetic mean	149.5	19559	130.8	0.9593	
Rating	150	19500	130	0.92	
Limit	165	17550	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-40-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	94.1	14262	151.56	0.988	
2#:	94.9	14200	149.63	0.9874	
3#:	95.1	14278	150.14	0.9879	
Arithmetic mean	94.7	14247	150.44	0.9878	
Rating	100	13000	130	0.92	
Limit	110	11700	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-40-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	96.3	14585	151.45	0.938	
2#:	96.2	14540	151.14	0.9388	
3#:	96.4	14608	151.54	0.9386	
Arithmetic mean	96.3	14578	151.38	0.9385	
Rating	100	13000	130	0.92	
Limit	110	11700	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-40-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	48.4	6549	135.31	0.9816	
2#:	48.8	6552	134.26	0.9827	
3#:	47.9	6507	135.85	0.9804	
Arithmetic mean	48.4	6536	135.14	0.9816	
Rating	50	6500	130	0.92	
Limit	55	5850	90	0.92	
Verdict	P	P	P	P	

**Table 2 – Energy efficiency test for partly test model**

Model No.:	YR05045-40-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	47.4	6636	140.00	0.930	
2#:	49.2	6651	135.18	0.931	
3#:	48.8	6581	134.86	0.9308	
Arithmetic mean	48.5	6623	136.68	0.9306	
Rating	50	6500	130	0.92	
Limit	55	5850	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR24045-50-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	240	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	245.1	29226	119.24	0.9958	
2#:	246.0	29145	118.48	0.9963	
3#:	245.9	29234	118.89	0.9959	
Arithmetic mean	245.7	29202	118.87	0.996	
Rating	240	31200	130	0.92	
Limit	264	28080	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR24045-50-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	240	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	242.3	29514	121.81	0.9762	
2#:	242.1	29503	121.86	0.9762	
3#:	243.2	29552	121.51	0.9747	
Arithmetic mean	242.5	29523	121.73	0.9757	
Rating	240	31200	130	0.92	
Limit	264	28080	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR20045-50-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	200	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	202.7	25811	127.34	0.9949	
2#:	200.9	25762	128.23	0.9954	
3#:	201.4	25904	128.62	0.9954	
Arithmetic mean	201.7	25826	128.06	0.9952	
Rating	200	26000	130	0.92	
Limit	220	23400	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR20045-50-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	200	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	200.2	26019	129.97	0.9651	
2#:	201.4	26110	129.64	0.9652	
3#:	201.7	25973	128.77	0.9654	
Arithmetic mean	201.1	26034	129.46	0.9652	
Rating	200	26000	130	0.92	
Limit	220	23400	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-50-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	97.7	13231	135.42	0.9881	
2#:	97.4	13243	135.97	0.9876	
3#:	96.3	13221	137.29	0.9893	
Arithmetic mean	97.1	13232	136.23	0.9883	
Rating	100	13000	130	0.92	
Limit	110	11700	90	0.92	
Verdict	P	P	P	P	

**Table 2 – Energy efficiency test for partly test model**

Model No.:	YR10045-50-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	97.8	13453	137.56	0.9379	
2#:	97.4	13503	138.63	0.9372	
3#:	99.4	13388	134.69	0.9372	
Arithmetic mean	98.2	13448	136.96	0.9374	
Rating	100	13000	130	0.92	
Limit	110	11700	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-50-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	45.2	6714	148.54	0.9847	
2#:	44.9	6690	149.0	0.9852	
3#:	45.5	6690	147.03	0.9839	
Arithmetic mean	45.2	6698	148.19	0.9846	
Rating	50	6500	130	0.92	
Limit	55	5850	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-50-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	46.3	6753	145.85	0.9289	
2#:	45.3	6667	147.17	0.9295	
3#:	45.3	6821	150.57	0.9282	
Arithmetic mean	45.6	6747	147.86	0.9289	
Rating	50	6500	130	0.92	
Limit	55	5850	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR20045-60-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	200	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	196.9	26810	136.16	0.9945	
2#:	195.7	26788	136.88	0.9935	
3#:	195.9	26785	136.73	0.9944	
Arithmetic mean	196.2	26794	136.59	0.9941	
Rating	200	26000	130	0.92	
Limit	220	23400	90	0.92	
Verdict	P	P	P	P	

**Table 2 – Energy efficiency test for partly test model**

Model No.:	YR20045-60-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	200	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	196.4	27178	138.38	0.9623	
2#:	196.2	27213	138.7	0.9629	
3#:	196.6	27260	138.66	0.9623	
Arithmetic mean	196.4	27217	138.58	0.9625	
Rating	200	26000	130	0.92	
Limit	220	23400	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR15045-60-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	150	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	146.8	20954	142.74	0.9922	
2#:	145.6	21007	144.28	0.9921	
3#:	146.0	21055	144.21	0.9918	
Arithmetic mean	146.1	21005	143.74	0.992	
Rating	150	19500	130	0.92	
Limit	165	17550	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR15045-60-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	150	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	149.1	21516	144.31	0.9592	
2#:	150.3	21475	142.88	0.9587	
3#:	148.8	21456	144.19	0.959	
Arithmetic mean	149.4	21482	143.79	0.959	
Rating	150	19500	130	0.92	
Limit	165	17550	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-60-L	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	99.8	13908	139.36	0.9891	
2#:	100.9	13963	138.38	0.9895	
3#:	99.8	13844	138.72	0.9882	
Arithmetic mean	100.2	13905	138.82	0.9889	
Rating	100	13000	130	0.92	
Limit	110	11700	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-60-L	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	101.1	14051	138.98	0.9427	
2#:	100.2	14024	139.96	0.9438	
3#:	100.7	14146	140.48	0.9426	
Arithmetic mean	100.7	14074	139.81	0.943	
Rating	100	13000	130	0.92	
Limit	110	11700	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR24045-30-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	240	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	249.9	33326	133.36	0.9962	
2#:	248.5	33281	133.93	0.9963	
3#:	250.8	33400	133.17	0.9974	
Arithmetic mean	249.7	33336	133.49	0.9966	
Rating	240	36000	150	0.92	
Limit	264	32400	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR24045-30-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	240	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	223.7	33979	151.9	0.9598	
2#:	223.3	34003	152.27	0.9594	
3#:	224.5	33919	151.09	0.9586	
Arithmetic mean	223.8	33967	151.75	0.9593	
Rating	240	36000	150	0.92	
Limit	264	32400	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR20045-30-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	200	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	190.6	28524	149.65	0.9915	
2#:	189.4	28453	150.23	0.9914	
3#:	189.9	28454	149.84	0.9908	
Arithmetic mean	190.0	28477	149.91	0.9912	
Rating	200	30000	150	0.92	
Limit	220	27000	90	0.92	
Verdict	P	P	P	P	

**Table 2 – Energy efficiency test for partly test model**

Model No.:	YR20045-30-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	200	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	186.0	28517	153.32	0.9437	
2#:	187.1	28605	152.89	0.9448	
3#:	185.5	28572	154.03	0.9434	
Arithmetic mean	186.2	28565	153.41	0.944	
Rating	200	30000	150	0.92	
Limit	220	27000	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR15045-30-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	150	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	146.3	21465	146.72	0.9877	
2#:	145.2	21384	147.27	0.988	
3#:	146.2	21473	146.87	0.9886	
Arithmetic mean	145.9	21441	146.95	0.9881	
Rating	150	22500	150	0.92	
Limit	165	20250	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR15045-30-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	150	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	144.7	21543	148.88	0.9332	
2#:	143.8	21504	149.54	0.9325	
3#:	143.0	21498	150.34	0.9342	
Arithmetic mean	143.8	21515	149.59	0.9333	
Rating	150	22500	150	0.92	
Limit	165	20250	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-30-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	46.8	6869	146.77	0.9774	
2#:	46.1	6870	149.02	0.9782	
3#:	46.3	6902	149.07	0.9765	
Arithmetic mean	46.4	6880	148.29	0.9774	
Rating	50	7500	150	0.92	
Limit	55	6750	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-30-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	46.1	6897	149.61	0.9208	
2#:	47.9	6946	145.01	0.9207	
3#:	46.3	6876	148.51	0.921	
Arithmetic mean	46.8	6906	147.71	0.9208	
Rating	50	7500	150	0.92	
Limit	55	6750	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR24045-40-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	240	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	233,0	32573	139,8	0,9942	
2#:	233,3	32578	139,64	0,9933	
3#:	234,3	32652	139,36	0,9927	
Arithmetic mean	233,5	32601	139,6	0,9934	
Rating	240	36000	150	0,92	
Limit	264	32400	90	0,92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR24045-40-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	240	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	234.2	32498	138.76	0.9607	
2#:	233.3	32495	139.28	0.961	
3#:	234.4	32433	138.37	0.9614	
Arithmetic mean	234.0	32475	138.8	0.961	
Rating	240	36000	150	0.92	
Limit	264	32400	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR20045-40-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	200	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	201.4	30649	152.18	0.9922	
2#:	199.6	30705	153.83	0.9921	
3#:	200.7	30715	153.04	0.9921	
Arithmetic mean	200.6	30690	153.02	0.9921	
Rating	200	30000	150	0.92	
Limit	220	27000	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR20045-40-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	200	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	196.6	30731	156.31	0.9494	
2#:	197.8	30804	155.73	0.9487	
3#:	198.3	30780	155.22	0.9491	
Arithmetic mean	197.6	30772	155.75	0.9491	
Rating	200	30000	150	0.92	
Limit	220	27000	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-40-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	95.0	14271	150.22	0.989	
2#:	96.5	14319	148.38	0.9903	
3#:	95.9	14324	149.36	0.991	
Arithmetic mean	95.8	14305	149.32	0.9901	
Rating	100	15000	150	0.92	
Limit	110	13500	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-40-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	96.7	14445	149.38	0.9518	
2#:	97.1	14442	148.73	0.9509	
3#:	97.2	14350	147.63	0.952	
Arithmetic mean	97.0	14412	148.58	0.9516	
Rating	100	15000	150	0.92	
Limit	110	13500	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-40-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	47.7	7555	158.39	0.9798	
2#:	49.3	7482	151.76	0.9801	
3#:	48.8	7450	152.66	0.9797	
Arithmetic mean	48.6	7496	154.27	0.9799	
Rating	50	7500	150	0.92	
Limit	55	6750	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-40-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	49.2	7647	155.43	0.9197	
2#:	48.6	7624	156.87	0.9206	
3#:	48.6	7657	157.55	0.9207	
Arithmetic mean	48.8	7643	156.62	0.9203	
Rating	50	7500	150	0.92	
Limit	55	6750	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR24045-50-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	240	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	237.6	32641	137.38	0.9931	
2#:	238.8	32557	136.34	0.9932	
3#:	239.7	32574	135.89	0.9938	
Arithmetic mean	238.7	32591	136.54	0.9934	
Rating	240	36000	150	0.92	
Limit	264	32400	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR24045-50-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	240	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	238.7	32723	137.09	0.9638	
2#:	237.9	32796	137.86	0.9629	
3#:	239.2	32655	136.52	0.9639	
Arithmetic mean	238.6	32725	137.16	0.9635	
Rating	240	36000	150	0.92	
Limit	264	32400	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR15045-50-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	150	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	148.2	22594	152.46	0.9881	
2#:	147.9	22702	153.5	0.9878	
3#:	148.4	22551	151.96	0.9872	
Arithmetic mean	148.2	22616	152.64	0.9877	
Rating	150	22500	150	0.92	
Limit	165	20250	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR15045-50-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	150	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	145.8	22662	155.43	0.9348	
2#:	145.9	22691	155.52	0.9341	
3#:	145.9	22656	155.28	0.9350	
Arithmetic mean	145.9	22670	155.41	0.9346	
Rating	150	22500	150	0.92	
Limit	165	20250	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-50-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	100.7	14792	146.89	0.9904	
2#:	100.4	14776	147.17	0.9896	
3#:	100.2	14826	147.96	0.9897	
Arithmetic mean	100.4	14798	147.34	0.9899	
Rating	100	15000	150	0.92	
Limit	110	13500	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-50-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	99.4	15124	152.15	0.9549	
2#:	100.2	15160	151.3	0.9555	
3#:	100.1	15193	151.78	0.9556	
Arithmetic mean	99.9	15159	151.74	0.9553	
Rating	100	15000	150	0.92	
Limit	110	13500	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-50-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	46.4	7258	156.42	0.9853	
2#:	44.9	7179	159.89	0.9841	
3#:	46.4	7272	156.72	0.9854	
Arithmetic mean	45.9	7236	157.68	0.9849	
Rating	50	7500	150	0.92	
Limit	55	6750	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-50-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	46.5	7314	157.29	0.9275	
2#:	46.3	7388	159.57	0.9284	
3#:	46.0	7272	158.09	0.9279	
Arithmetic mean	46.3	7325	158.32	0.9279	
Rating	50	7500	150	0.92	
Limit	55	6750	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR20045-60-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	200	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	200.9	31548	157.03	0.9932	
2#:	201.6	31544	156.47	0.9936	
3#:	201.8	31630	156.74	0.9932	
Arithmetic mean	201.4	31574	156.75	0.9933	
Rating	200	30000	150	0.92	
Limit	220	27000	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR20045-60-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	200	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	198.3	31747	160.1	0.949	
2#:	197.8	31757	160.55	0.9487	
3#:	196.9	31647	160.73	0.949	
Arithmetic mean	197.7	31717	160.46	0.9489	
Rating	200	30000	150	0.92	
Limit	220	27000	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR15045-60-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	150	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	140.8	22706	161.26	0.9877	
2#:	140.8	22679	161.07	0.9873	
3#:	141.5	22668	160.2	0.9874	
Arithmetic mean	141.0	22684	160.84	0.9875	
Rating	150	22500	150	0.92	
Limit	165	20250	90	0.92	
Verdict	P	P	P	P	

**Table 2 – Energy efficiency test for partly test model**

Model No.:	YR15045-60-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	150	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	138.9	22704	163.46	0.9302	
2#:	139.1	22681	163.06	0.9296	
3#:	139.5	22779	163.29	0.9285	
Arithmetic mean	139.2	22721	163.27	0.9294	
Rating	150	22500	150	0.92	
Limit	165	20250	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-60-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	93.9	14582	155.29	0.9903	
2#:	94.7	14554	153.69	0.9919	
3#:	93.3	14566	156.12	0.9895	
Arithmetic mean	94.0	14567	155.03	0.9906	
Rating	100	15000	150	0.92	
Limit	110	13500	90	0.92	
Verdict	P	P	P	P	



Table 2 – Energy efficiency test for partly test model

Model No.:	YR10045-60-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	100	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	92.9	14504	156.12	0.9514	
2#:	92.9	14579	156.93	0.952	
3#:	92.6	14579	157.44	0.951	
Arithmetic mean	92.8	14554	156.83	0.9515	
Rating	100	15000	150	0.92	
Limit	110	13500	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022

Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-60-H	Test voltage (V):	127	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	51.7	6928	134.00	0.9829	
2#:	52.8	6888	130.45	0.9845	
3#:	52.6	6957	132.26	0.9837	
Arithmetic mean	52.4	6924	132.24	0.9837	
Rating	50	7500	150	0.92	
Limit	55	6750	90	0.92	
Verdict	P	P	P	P	



Ordinance no. 62/2022


Table 2 – Energy efficiency test for partly test model

Model No.:	YR05045-60-H	Test voltage (V):	220	Frequency (Hz):	60
Rated wattage (W):	50	Stabilization time (h):	1		
Test items Sample No.	Lamp power (W)	Initial luminous flux (lm)	Initial efficiency (lm/W)	Power factor ()	
1#:	51.7	7030	135.98	0.9355	
2#:	51.5	6944	134.83	0.9359	
3#:	51.3	7087	138.15	0.9353	
Arithmetic mean	51.5	7020	136.32	0.9356	
Rating	50	7500	150	0.92	
Limit	55	6750	90	0.92	
Verdict	P	P	P	P	



Annex 1:

The luminous distribution for YR24045-60-H

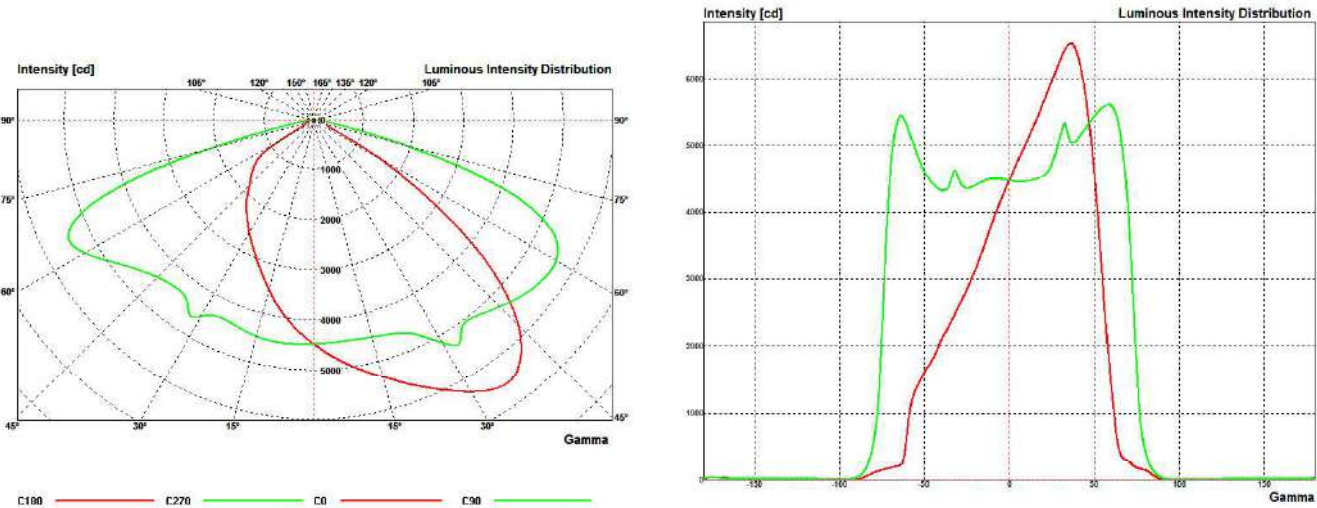


Ordinance no. 62/2022

Annex 2:

Summary of Results:

No.	Test Item	Test Method
1	Light Ageing Test- UV Exposure	ASTM G154-16 Cycle 3

Original Sample Photo:

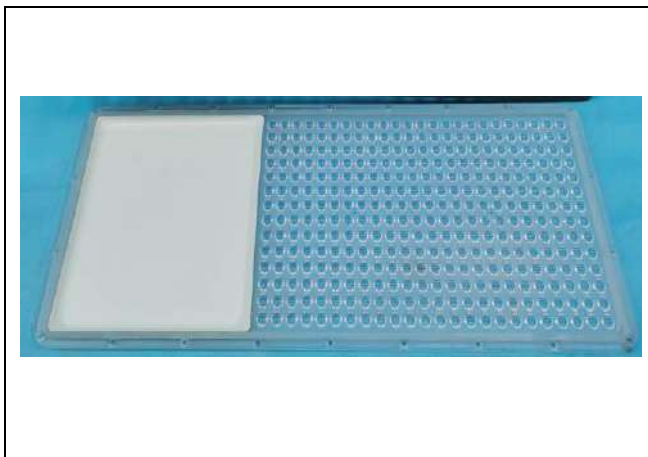

Test Item: Light Ageing Test-UV Exposure

Sample Description: Plastic part

Test Method: ASTM G154-16 Cycle 3

Test Condition:

Exposure cycle:

ASTM G154-16 Cycle 3

Lamp type: UVB-313


8h UV at $(70 \pm 3)^\circ\text{C}$ BPT, $0.49\text{W}/(\text{m}^2 \cdot \text{nm})@310\text{nm}$ 4h condensation at $(50 \pm 3)^\circ\text{C}$ BPT

Exposure duration: 2016 h

Test Date: 2024-05-10~2024-08-02

Ordinance no. 62/2022

Test Photo:

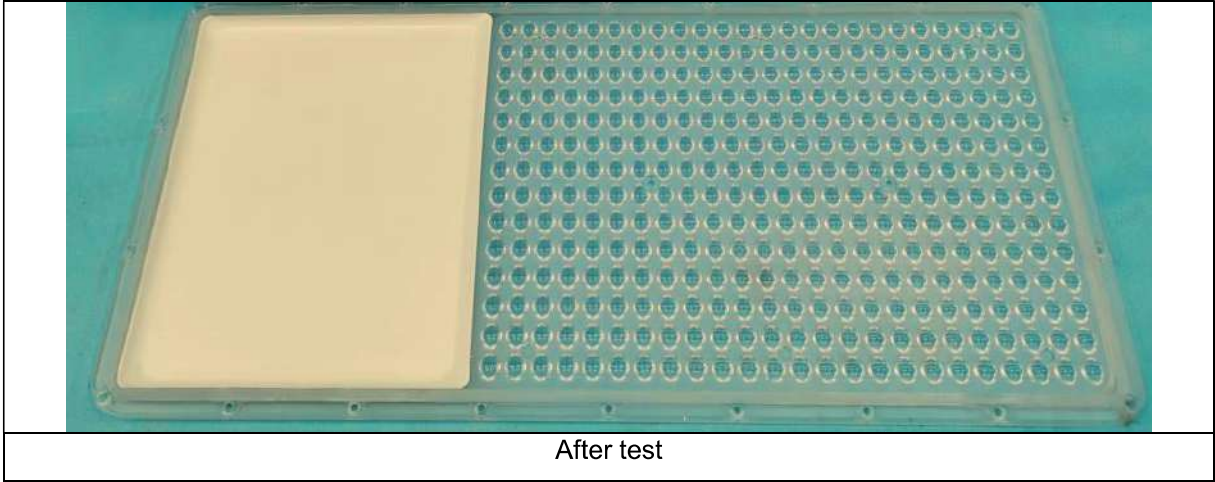

Equipment Information:

Equipment	Model	Equipment No.	Calibration date	Next Calibration date
UV Accelerated Weathering Tester	QUV/SE	GZMR-AG-E207	2023-12-14	2024-12-13


Attachment 1: Equipment list and measurement uncertainty

Equipment list of Safety and PF:

Equipment No.	Equipment Name	Model No.	Manufacturer	Next calibration
GZE006-24	Digital power analyzer	8776A	Qingzhi	2024/11/10
GZE010-3	Insulation tester	1508	Fluke	2025/3/5
GZE014-10	Oven	QYOV-100L	QiYa	2025/7/21
GZE015-1	Temp.& Humidity chamber	MHG-800RR	Terchy	2025/9/22
GZE016-41	Digital calipers	0-150mm/0.01mm	Guanglu	2025/4/12
GZE018-49	Test probe B (Jointed)	ZX-11	Zhilitong	2025/8/31
GZE020-45	Thermo-hygrometer	608-H1	testo	2025/7/11
GZE022-3	Glow-wire test apparatus(IEC60695-2-10:2013)	ZLT-GTR	ZLT	2025/1/15
GZE027-22	Digital stopwatch	PC894	Tianfu	2025/3/13
GZE068-21	Frequency power supply	AN97015TS	Ainuo	2025/8/29
GZE100-44	Data acquisition/ switch unit	34972A	Agilent	2025/2/16
GZE120-2	Lamp cap torque tester	NJ210	Everfine	2025/9/19
GZE126-8	High accuracy array spectro-radiometer	HAAS-2000-VIS-V2	Everfine	2025/9/19
GZE126-9	Integrating sphere	AIS-2 2.0m R98	Everfine	2026/1/5
GZE126-22	Standard light source	D204H	Everfine	2025/8/7
GZE126-12	Digital CC&CV DC power supply	WY305	Everfine	2025/9/22
GZE126-14	AC Testing power source	DPS1010	Everfine	2025/9/22
GZE129-1	Goniophotometric system	GMS-1980	SENSING	2025/6/23
GZE126-39	Digital power analyzer	PF310A	Everfine	2025/4/19
GZE129-3	AC power source	APW-105N	ALL POWER	2025/7/7
GZE129-4	Total luminous flux standard lamp	110V/200W	SENSING	2025/4/17


Attachment 1: Equipment list and measurement uncertainty

For a 95% confidence level, the test result includes consideration of measurement uncertainty from the test equipment and methods, see below table:

Test Discipline	Frequency / Parameter	MU
Voltage	Up to 1000 V/ up to 1 kHz	±1,5 %
Current	Up to 5 A/ dc up to 60 Hz	±1,5 %
Power	(50/60 Hz) up to 3 kW	±3 %
Power Factor (50/60 Hz)	—	±0,05
Frequency	up to 10 kHz	±0,2 %
Temperature	- 35°C to below 100°C	±2
Timer	10 ms up to 200 ms	±5 %
	200 ms up to 1 s	±10 ms
	1 s and above	±1 %
Force	For all value	±6 %
Torque	For all value	±10 %
Angles	For all value	±1 degree
Relative humidity	30% to 95% RH	±6 % RH
Insulation resistance	For all value	±0,016MΩ
Spectro-radiometer	For all value	±3 %
High-accuracy Digital Photometer Head	For all value	±8.2 %

Attachment 2: Photo documentation

 Details of: General view of all 240 W models

View:

- ☒ general
☐ front
☐ rear
☐ right
☐ left
☐ top
☐ bottom


 Details of: General view of all 240 W models

View:

- ☒ general
☐ front
☐ rear
☐ right
☐ left
☐ top
☐ bottom



Attachment 2: Photo documentation

Details of: General view of all 200 W models

View:

- ☒ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom



Details of: General view of all 200 W models

View:

- ☒ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom



Attachment 2: Photo documentation

Details of: General view of all 150 W models

View:

- ☒ general
☐ front
☐ rear
☐ right
☐ left
☐ top
☐ bottom



Details of: General view of all 150 W models

View:

- ☒ general
☐ front
☐ rear
☐ right
☐ left
☐ top
☐ bottom



Attachment 2: Photo documentation

Details of: General view of all 100 W models

View:

- ☐ general
☐ front
☐ rear
☐ right
☐ left
☐ top
☐ bottom



Details of: General view of all 100 W models

View:

- ☐ general
☐ front
☐ rear
☐ right
☐ left
☐ top
☐ bottom



Attachment 2: Photo documentation

Details of: General view of all 50 W models

View:

- ☐ general
☐ front
☐ rear
☐ right
☐ left
☐ top
☐ bottom



Details of: General view of all 50 W models

View:

- ☐ general
☐ front
☐ rear
☐ right
☐ left
☐ top
☐ bottom




Attachment 2: Photo documentation

Details of: Internal view of YR24045-60-H, same as other models

View:

- ☐ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom

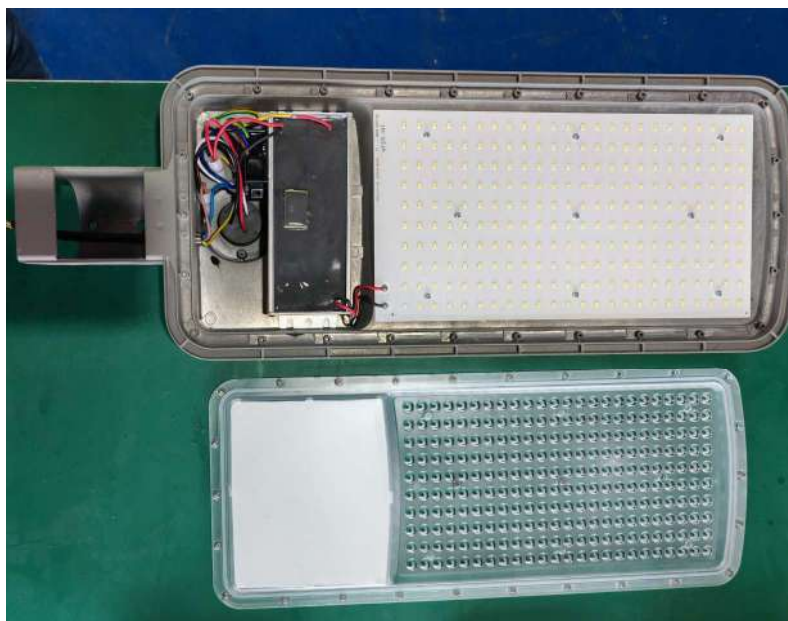

Details of: LED driver for 240 W models, similar to other driver

View:

- ☒ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom




Attachment 2: Photo documentation

Details of: voltage surge protection device (ZP-LED-P10D) for each model

View:

- ☐ general
- ☐ front
- ☐ rear
- ☐ right
- ☐ left
- ☐ top
- ☐ bottom

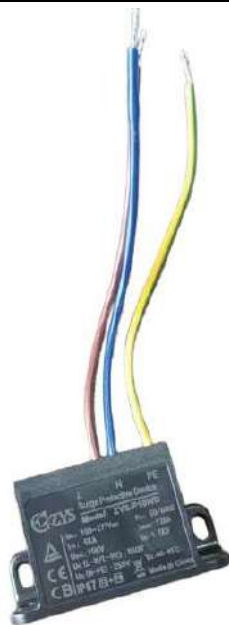

- - - End of Report - - -